



Air Conditioning & Heating

DSXC16

SPLIT SYSTEM AIR CONDITIONER

UP TO 16 SEER

COOLING CAPACITY:

24,000 - 57,000 BTU/H



Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
AHRI Ratings.....	20
Dimensions	30
Wiring Diagram.....	31
Accessories	32

Standard Features

- R-410A chlorine-free refrigerant
- Two-Stage Copeland® UltraTech™ scroll compressor
- High-density foam compressor sound blanket
- ComfortNet™ Communications System compatible
- Expanded ComfortAlert™ diagnostics
- Set-up capable with 2 low-voltage wires to outdoor unit
- Diagnostic indicator lights and storage of 6 fault codes
- Color-coded terminal strip for non-communicating set-up
- High- and low-pressure switches
- Factory-installed filter drier
- Coil and ambient temperature sensors
- Two-speed, quiet condenser fan motor
- AHRI Certified; ETL Listed

Cabinet Features

- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder paint finish
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home), 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.



NOMENCLATURE

	D	S	X	C	16	036	1	A	A	
	1	2	3	4	5,6	7,8,9	10	11	12	
Brand D Goodman® Brand									Engineering * Minor Revision	
Product Category S Split System									Engineering * Major Revision	
Unit Type C Condenser R-22 X Condenser R-410A H Heat Pump R-22 Z Heat Pump R-410A									Electrical 1 208/230 V, 1 Phase, 60 Hz 2 220/240 V, 1 Phase, 50 Hz 3 208/230 V, 3 Phase, 60 Hz 4 460 V, 3 Phase, 60 Hz 5 380/415 V, 3 Phase, 50 Hz	
Communication Feature C ComfortNet 4-wire communications ready									Nominal Capacity 018 1½ Tons 048 4 Tons 024 2 Tons 060 5 Tons 030 2½ Tons 090 7½ tons 036 3 Tons 120 10 Tons 042 3½ Tons	
Efficiency 13 13 SEER 16 16 SEER 14 14 SEER 18 18 SEER										

* Neither used for order entry or inventory management.



SPECIFICATIONS

	DSXC16 0241AA/B	DSXC16 0241AC	DSXC16 0361AA/B	DSXC16 0361AC	DSXC16 0481B*	DSXC16 0601B*
COOLING CAPACITY						
Nominal Cooling (BTU/h)	24,000	24,000	36,000	36,000	48,000	60,000
Decibels	71	71	70.4/70.9	70.4/70.9	74	75
COMPRESSOR						
RLA	10.3	11.7	16.7	15.3	21.2	28.8
LRA	52.0	58.0	82.0	83.0	104.0	152.9
CONDENSER FAN MOTOR						
Horsepower (RPM)	1/6	1/6	1/6	1/6	1/6	1/6
FLA	1.1	1.1	0.9	0.9	1.2	1.0
REFRIGERATION SYSTEM						
Refrigerant Line Size ¹						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	97	97	107	107	132	197
ELECTRICAL DATA						
Voltage-Hz	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60
Minimum Circuit Ampacity ²	14.0	15.7	21.8	20.0	27.7	37.2
Max. Overcurrent Protection ³	20	20	35	35	45	60
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Power Supply	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	181	181	184	184	219	279
SHIP WEIGHT (LBS)	198	198	202	202	241	301

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT, NOT THE INDOOR COIL.

EXPANDED COOLING DATA — DSXC160361** / CA*F3743*6A* +TXV / MBVC1600** HIGH STAGE (CONT.)

Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Indoor Wet Bulb Temperature (59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111, 115). Rows include performance metrics like MBh, S/T, ΔT, kW, Amps, HI PR, Lo PR for various indoor wet bulb temperatures.

Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Indoor Wet Bulb Temperature (59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111, 115). Rows include performance metrics like MBh, S/T, ΔT, kW, Amps, HI PR, Lo PR for various indoor wet bulb temperatures.

IDB = Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.
kW = Total system power
Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DSXC160601B*/CA*F4961*6A*+TXV / MBVC2000** -1** LOW STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1350	MBh	40.63	41.51	44.35	47.41	39.68	40.55	43.32	46.31	38.74	39.58	42.29	45.21	37.79	38.62	41.26	44.11	35.90	36.69	39.20	41.90	33.26	33.98	36.31	38.81
		S/T	0.91	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.59	1.00	0.98	0.80	0.60
		ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	24	24	21	17	23	23	20	16
		kW	2.47	2.53	2.62	2.70	2.68	2.74	2.83	2.93	2.86	2.92	3.02	3.13	3.01	3.08	3.19	3.30	3.15	3.22	3.33	3.45	3.26	3.34	3.46	3.58
		Amps	10.1	10.3	10.6	11.0	10.9	11.1	11.5	11.9	11.8	12.1	12.5	13.0	12.6	12.9	13.4	13.9	13.4	13.8	14.2	14.8	14.2	14.6	15.1	15.6
	1217	HI PR	219	235	249	259	245	264	279	291	279	300	317	331	318	342	361	377	358	385	406	424	395	425	449	468
		LO PR	109	116	127	135	116	123	134	143	120	128	139	149	126	134	147	156	132	141	154	164	137	145	159	169
		MBh	40.0	40.9	43.7	46.7	39.1	39.9	42.7	45.6	38.2	39.0	41.7	44.5	37.2	38.0	40.6	43.5	35.4	36.1	38.6	41.3	32.8	33.5	35.8	38.2
		S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57
		ΔT	26	25	22	18	27	26	22	18	27	26	22	18	27	26	23	18	27	26	22	18	25	24	21	17
1050	kW	2.46	2.52	2.60	2.69	2.66	2.72	2.81	2.91	2.84	2.90	3.00	3.11	3.00	3.07	3.17	3.28	3.13	3.20	3.31	3.43	3.24	3.32	3.44	3.56	
	Amps	10.0	10.2	10.6	11.0	10.8	11.1	11.4	11.8	11.7	12.0	12.4	12.9	12.5	12.8	13.3	13.8	13.3	13.7	14.1	14.7	14.1	14.5	15.0	15.5	
	HI PR	217	234	247	257	244	262	277	289	277	298	315	329	316	340	359	374	355	382	404	421	392	422	446	465	
	LO PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	152	162	136	144	158	168	
	MBh	36.9	37.8	40.3	43.1	36.1	36.9	39.4	42.1	35.2	36.0	38.5	41.1	34.4	35.1	37.5	40.1	32.6	33.4	35.6	38.1	30.2	30.9	33.0	35.3	

85	1350	MBh	41.34	42.14	44.13	47.08	40.38	41.16	43.11	45.99	39.41	40.18	42.08	44.89	38.45	39.20	41.05	43.80	36.53	37.24	39.00	41.61	33.84	34.49	36.13	38.54
		S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78
		ΔT	27	27	25	22	27	27	25	22	27	27	25	22	26	26	27	22	25	25	25	22	23	23	24	20
		kW	2.50	2.55	2.64	2.73	2.70	2.76	2.86	2.96	2.88	2.95	3.05	3.16	3.04	3.11	3.22	3.33	3.18	3.25	3.36	3.48	3.29	3.37	3.49	3.61
		Amps	10.1	10.4	10.7	11.1	11.0	11.2	11.6	12.0	11.9	12.2	12.6	13.1	12.7	13.0	13.5	14.0	13.6	13.9	14.4	14.9	14.4	14.7	15.2	15.8
	1217	HI PR	221	238	251	262	248	267	282	294	282	303	320	334	321	346	365	381	361	389	411	428	399	430	454	473
		LO PR	110	118	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165	138	147	160	171
		MBh	40.7	41.5	43.5	46.4	39.8	40.5	42.5	45.3	38.8	39.6	41.5	44.2	37.9	38.6	40.4	43.1	36.0	36.7	38.4	41.0	33.3	34.0	35.6	38.0
		S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74
		ΔT	28	28	26	23	29	28	27	23	29	28	27	23	29	28	27	23	27	28	26	23	25	26	25	21
1050	kW	2.48	2.54	2.62	2.71	2.68	2.75	2.84	2.94	2.86	2.93	3.03	3.14	3.02	3.09	3.20	3.31	3.16	3.23	3.34	3.46	3.27	3.35	3.47	3.59	
	Amps	10.1	10.3	10.7	11.1	10.9	11.2	11.5	12.0	11.8	12.1	12.5	13.0	12.7	13.0	13.4	13.9	13.5	13.8	14.3	14.8	14.3	14.6	15.1	15.7	
	HI PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	408	425	396	427	450	470	
	LO PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
	MBh	37.6	38.3	40.1	42.8	36.7	37.4	39.2	41.8	35.8	36.5	38.3	40.8	35.0	35.6	37.3	39.8	33.2	33.9	35.5	37.8	30.8	31.4	32.9	35.0	

IDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRl (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.-fan)

EXPANDED COOLING DATA — DSXC160601B* / CA*F4961*6A* +TXV / MBVC2000** -1** HIGH STAGE

Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Indoor Wet Bulb Temperature (65°F, 71°F, 77°F, 83°F, 89°F, 95°F). Rows include MBh, S/T, ΔT, kW, Amps, HI PR, LO PR for models 2025, 1800, and 1575.

Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Indoor Wet Bulb Temperature (65°F, 71°F, 77°F, 83°F, 89°F, 95°F). Rows include MBh, S/T, ΔT, kW, Amps, HI PR, LO PR for models 2025, 1800, and 1575.

IDB = Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions
kW = Total system power
Amps = outdoor unit amps (comp. +fan)

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0241A*	AVPTC30C14A*		23,000	16,800	16.00	12.50	830	5924460
	CA*F3636*6D*+EEP+TXV		24,000	17,600	14.50	12.00	820	5357193
	CA*F3636*6D*+MBVC1200**-1A*+TXV		24,000	17,600	16.00	13.00	820	4392752
	CA*F3636*6D*+TXV	G*VC80604B*B*	24,000	17,600	16.00	13.00	820	5038827
	CA*F3636*6D*+TXV	A*VC80604B*B*	24,000	17,600	16.00	13.00	820	5039091
	CA*F3636*6D*+TXV	G*VC950453BxB*	24,000	17,600	16.00	13.00	820	5620613
	CA*F3636*6D*+TXV	G*VC950704CXB*	24,000	17,600	16.00	13.00	800	5620620
	CA*F3636*6D*+TXV	A*VC950714CXB*	24,000	17,600	16.00	13.00	800	5620626
	CA*F3636*6D*+TXV	G*VC950714CXB*	24,000	17,600	16.00	13.00	800	5620627
	CA*F3636*6D*+TXV	G*VM960603BxB*	24,000	17,600	16.00	13.00	820	5620630
	CA*F3636*6D*+TXV	A*VM960604CXB*	24,000	17,600	16.00	13.00	800	5620635
	CA*F3636*6D*+TXV	G*VM960604CXB*	24,000	17,600	16.00	13.00	800	5620636
	CA*F3636*6D*+TXV	A*VC950453BxB*	24,000	17,600	16.00	13.00	820	6497619
	CA*F3636*6D*+TXV	A*VC950704CXB*	24,000	17,600	16.00	13.00	800	6497620
	CA*F3636*6D*+TXV	A*VM960603BxB*	24,000	17,600	16.00	13.00	820	6497621
	CA*F3636*6D*+TXV	ADVC80603B*B*	24,000	17,600	16.00	13.00	810	6497622
	CA*F3642*6D*+EEP+TXV		24,000	17,600	14.50	12.00	820	5357194
	CA*F3642*6D*+TXV	A*VC80604B*B*	24,000	17,600	16.00	13.00	820	5039010
	CA*F3642*6D*+TXV	G*VC80604B*B*	24,000	17,600	16.00	13.00	820	5039220
	CA*F3642*6D*+TXV	G*VC950453BxB*	24,000	17,600	16.00	13.00	820	5620614
	CA*F3642*6D*+TXV	G*VC950704CXB*	24,000	17,600	16.00	13.00	800	5620621
	CA*F3642*6D*+TXV	A*VC950714CXB*	24,000	17,600	16.00	13.00	800	5620628
	CA*F3642*6D*+TXV	G*VC950714CXB*	24,000	17,600	16.00	13.00	800	5620629
	CA*F3642*6D*+TXV	G*VM960603BxB*	24,000	17,600	16.00	13.00	820	5620631
	CA*F3642*6D*+TXV	A*VM960604CXB*	24,000	17,600	16.00	13.00	800	5620637
	CA*F3642*6D*+TXV	G*VM960604CXB*	24,000	17,600	16.00	13.00	800	5620638
	CA*F3642*6D*+TXV	A*VC950704CXB*	24,000	17,600	16.00	13.00	800	6497623
	CA*F3642*6D*+TXV	A*VC950905CXB*	24,000	17,600	16.00	13.00	800	6497624
	CA*F3642*6D*+TXV	A*VC950915DXB*	24,000	17,600	16.00	13.00	800	6497625
	CA*F3642*6D*+TXV	A*VM960805CXB*	24,000	17,600	16.00	13.00	800	6497626
	CA*F3642*6D*+TXV	A*VM960805DXB*	24,000	17,600	16.00	13.00	800	6497627
	CA*F3642*6D*+TXV	G*VC950905CXB*	24,000	17,600	16.00	13.00	800	6497628
	CA*F3642*6D*+TXV	G*VC950915DXB*	24,000	17,600	16.00	13.00	800	6497629
	CA*F3642*6D*+TXV	G*VM960805CXB*	24,000	17,600	16.00	13.00	800	6497630
	CA*F3642*6D*+TXV	G*VM960805DXB*	24,000	17,600	16.00	13.00	800	6497631
	CHPF3636B6C*+EEP+TXV		24,000	17,600	14.50	12.00	820	5357195
	CHPF3636B6C*+MBVC1200**-1A*+TXV		24,000	17,600	16.00	13.00	820	3653937
	CHPF3636B6C*+TXV	G*VC80604B*B*	24,000	17,600	16.00	13.00	820	5039090
	CHPF3636B6C*+TXV	A*VC80604B*B*	24,000	17,600	16.00	13.00	820	5039103
	CHPF3636B6C*+TXV	G*VC950453BxB*	24,000	17,600	16.00	13.00	820	5620615
	CHPF3636B6C*+TXV	G*VM960603BxB*	24,000	17,600	16.00	13.00	820	5620632
	CHPF3636B6C*+TXV	A*VM960604CXB*	24,000	17,600	16.00	12.50	800	5620639
	CHPF3636B6C*+TXV	G*VM960604CXB*	24,000	17,600	16.00	12.50	800	5620640
	CHPF3636B6C*+TXV	A*VC950453BxB*	24,000	17,600	16.00	13.00	820	6497632
	CHPF3636B6C*+TXV	A*VC950704CXB*	24,000	17,600	16.00	12.50	800	6497633

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0241A* (cont.)	CHPF3636B6C*+TXV	A*VM960603BXB*	24,000	17,600	16.00	13.00	820	6497634
	CHPF3636B6C*+TXV	G*VC950704CXB*	24,000	17,600	16.00	12.50	800	6497635
	CHPF3642C6C*+TXV	G*VC950453BXB*	24,000	17,600	16.00	13.00	820	5620616
	CHPF3642C6C*+TXV	G*VC950704CXB*	24,000	17,600	16.00	13.00	800	5620622
	CHPF3642C6C*+TXV	G*VM960603BXB*	24,000	17,600	16.00	13.00	820	5620633
	CHPF3642C6C*+TXV	A*VM960604CXB*	24,000	17,600	16.00	13.00	800	5620641
	CHPF3642C6C*+TXV	G*VM960604CXB*	24,000	17,600	16.00	13.00	800	5620642
	CHPF3642C6C*+TXV	A*VC950453BXB*	24,000	17,600	16.00	13.00	820	6497636
	CHPF3642C6C*+TXV	A*VC950704CXB*	24,000	17,600	16.00	13.00	800	6497637
	CHPF3642C6C*+TXV	A*VM960603BXB*	24,000	17,600	16.00	13.00	820	6497638
	CHPF3743C6B*+TXV	G*VC950453BXB*	24,000	17,600	16.00	12.50	820	5620617
	CHPF3743C6B*+TXV	G*VC950704CXB*	24,000	17,600	16.00	12.50	800	5620623
	CHPF3743C6B*+TXV	G*VM960603BXB*	24,000	17,600	16.00	12.50	820	5620634
	CHPF3743C6B*+TXV	A*VM960604CXB*	24,000	17,600	16.00	12.50	800	5620643
	CHPF3743C6B*+TXV	G*VM960604CXB*	24,000	17,600	16.00	12.50	800	5620644
	CHPF3743C6B*+TXV	A*VC950453BXB*	24,000	17,600	16.00	12.50	820	6497639
	CHPF3743C6B*+TXV	A*VC950704CXB*	24,000	17,600	16.00	12.50	800	6497640
	CHPF3743C6B*+TXV	A*VM960603BXB*	24,000	17,600	16.00	12.50	820	6497641
	CSCF3036N6D*+TXV	G*VC950453BXB*	24,000	17,600	15.50	12.50	800	5620618
	CSCF3036N6D*+TXV	G*VC950704CXB*	24,000	17,600	16.00	13.00	875	5620624
	CSCF3036N6D*+TXV	A*VC80604B*B*	24,000	17,600	16.00	13.00	820	6497642
	CSCF3036N6D*+TXV	A*VC950453BXB*	24,000	17,600	15.50	12.50	800	6497643
	CSCF3036N6D*+TXV	A*VC950704CXB*	24,000	17,600	16.00	13.00	875	6497644
	CSCF3036N6D*+TXV	A*VC950905CXB*	24,000	17,600	16.00	13.00	800	6497645
	CSCF3036N6D*+TXV	G*VC80604B*B*	24,000	17,600	16.00	13.00	820	6497646
	CSCF3036N6D*+TXV	G*VC950905CXB*	24,000	17,600	16.00	13.00	800	6497647
	CSCF3642N6D*+EER+TXV		24,000	17,600	14.50	12.00	820	5357196
	CSCF3642N6D*+TXV	G*VC950453BXB*	24,000	17,600	16.00	13.00	800	5620619
	CSCF3642N6D*+TXV	G*VC950704CXB*	24,000	17,600	16.00	13.00	875	5620625
	CSCF3642N6D*+TXV	A*VC80604B*B*	24,000	17,600	16.00	13.00	820	5948539
CSCF3642N6D*+TXV	G*VC80604B*B*	24,000	17,600	16.00	13.00	820	5948540	
CSCF3642N6D*+TXV	A*VC950453BXB*	24,000	17,600	16.00	13.00	800	6497648	
CSCF3642N6D*+TXV	A*VC950704CXB*	24,000	17,600	16.00	13.00	875	6497649	
CSCF3642N6D*+TXV	A*VC950905CXB*	24,000	17,600	16.00	13.00	800	6497650	
CSCF3642N6D*+TXV	G*VC950905CXB*	24,000	17,600	16.00	13.00	800	6497651	
DSXC16 0361A*	AVPTC42D14A*		35,000	25,200	16.00	12.00	1,200	5924363
	AVPTC48D14A*		36,000	25,800	16.00	12.50	1,200	5924364
	CA*F3642*6D*+MBVC1600**-1A*+TXV		35,000	25,200	16.00	12.50	1,200	3880067
	CA*F3642*6D*+TXV	A*VC80604B*B*	34,000	24,400	16.00	12.00	1,220	5038810
	CA*F3642*6D*+TXV	G*VC80604B*B*	34,000	24,400	16.00	12.00	1,220	5039092
	CA*F3642*6D*+TXV	G*VC950704CXB*	34,600	24,800	16.00	12.00	1,100	5620651
	CA*F3642*6D*+TXV	A*VC950714CXB*	34,600	24,800	16.00	12.00	1,100	5620658
	CA*F3642*6D*+TXV	G*VC950714CXB*	34,600	24,800	16.00	12.00	1,100	5620659
	CA*F3642*6D*+TXV	A*VC950905CXB*	34,600	24,800	15.50	12.00	1,150	5620664
	CA*F3642*6D*+TXV	G*VC950905CXB*	34,600	24,800	15.50	12.00	1,150	5620665

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0361A* (cont.)	CA*F3642*6D*+TXV	G*VC951155DXB*	34,600	24,800	16.00	12.30	1,150	5620683
	CA*F3642*6D*+TXV	A*VM960604CXB*	34,600	24,800	16.00	12.00	1,100	5620694
	CA*F3642*6D*+TXV	G*VM960604CXB*	34,600	24,800	16.00	12.00	1,100	5620695
	CA*F3642*6D*+TXV	A*VM960805CXB*	34,600	24,800	15.50	12.00	1,150	5620708
	CA*F3642*6D*+TXV	G*VM960805CXB*	34,600	24,800	15.50	12.00	1,150	5620709
	CA*F3642*6D*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.30	1,150	5620727
	CA*F3642*6D*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.30	1,150	5620735
	CA*F3642*6D*+TXV	A*VC80805C*B*	35,000	25,200	16.00	12.50	1,190	6497652
	CA*F3642*6D*+TXV	A*VC950453BXB*	34,000	24,400	15.50	12.00	1,130	6497653
	CA*F3642*6D*+TXV	A*VC950704CXB*	34,600	24,800	15.50	12.00	1,100	6497654
	CA*F3642*6D*+TXV	A*VC950905DXB*	34,600	24,800	16.00	12.25	1,150	6497655
	CA*F3642*6D*+TXV	A*VC950915DXB*	34,600	24,800	15.50	12.00	1,150	6497656
	CA*F3642*6D*+TXV	A*VC951155DXB*	34,600	24,800	16.00	12.30	1,150	6497657
	CA*F3642*6D*+TXV	A*VM960603BXB*	34,000	24,400	15.50	12.00	1,130	6497658
	CA*F3642*6D*+TXV	A*VM960805DXB*	34,600	24,800	15.50	12.00	1,150	6497659
	CA*F3642*6D*+TXV	A*VM961005DXB*	34,600	24,800	16.00	12.30	1,150	6497660
	CA*F3642*6D*+TXV	A*VM961155DXB*	34,600	24,800	16.00	12.30	1,150	6497661
	CA*F3642*6D*+TXV	ADVC80603B*B*	34,000	24,400	16.00	12.50	1,190	6497662
	CA*F3642*6D*+TXV	ADVC80805C*B*	35,000	25,200	16.00	12.50	1,190	6497663
	CA*F3642*6D*+TXV	G*VC80805C*B*	35,000	25,200	16.00	12.50	1,190	6497664
	CA*F3642*6D*+TXV	G*VC950453BXB*	34,000	24,400	16.00	12.20	1,130	6497665
	CA*F3642*6D*+TXV	G*VC950905DXB*	34,600	24,800	16.00	12.25	1,150	6497666
	CA*F3642*6D*+TXV	G*VC950915DXB*	34,600	24,800	15.50	12.00	1,150	6497667
	CA*F3642*6D*+TXV	G*VM960603BXB*	34,000	24,400	16.00	12.20	1,130	6497668
	CA*F3642*6D*+TXV	G*VM960805DXB*	34,600	24,800	15.50	12.00	1,150	6497669
	CA*F3743*6D*+EEP+TXV		34,000	24,400	14.50	11.50	1,200	5357197
	CA*F3743*6D*+MBVC1600**-1A*+TXV		35,000	25,200	16.00	12.50	1,100	4415027
	CA*F3743*6D*+TXV	G*VC911155DXA*	34,600	24,800	15.50	12.20	1,150	4415037
	CA*F3743*6D*+TXV	A*VC80604B*B*	34,000	24,400	16.00	12.50	1,220	5038932
	CA*F3743*6D*+TXV	G*VC80604B*B*	34,000	24,400	16.00	12.50	1,220	5039113
	CA*F3743*6D*+TXV	G*VC950704CXB*	34,600	24,800	16.00	12.30	1,100	5620652
	CA*F3743*6D*+TXV	A*VC950714CXB*	34,600	24,800	16.00	12.30	1,100	5620660
	CA*F3743*6D*+TXV	G*VC950714CXB*	34,600	24,800	16.00	12.30	1,100	5620661
	CA*F3743*6D*+TXV	A*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	5620666
	CA*F3743*6D*+TXV	G*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	5620667
	CA*F3743*6D*+TXV	G*VC950905DXB*	34,600	24,800	16.00	12.50	1,150	5620674
	CA*F3743*6D*+TXV	A*VC950915DXB*	34,600	24,800	16.00	12.50	1,150	5620679
	CA*F3743*6D*+TXV	G*VC950915DXB*	34,600	24,800	16.00	12.50	1,150	5620680
	CA*F3743*6D*+TXV	G*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	5620684
	CA*F3743*6D*+TXV	A*VM960604CXB*	34,600	24,800	16.00	12.50	1,100	5620696
	CA*F3743*6D*+TXV	G*VM960604CXB*	34,600	24,800	16.00	12.50	1,100	5620697
	CA*F3743*6D*+TXV	A*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	5620710
CA*F3743*6D*+TXV	G*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	5620711	
CA*F3743*6D*+TXV	G*VM960805DXB*	34,600	24,800	16.00	12.50	1,150	5620720	
CA*F3743*6D*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	5620728	

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0361A* (cont.)	CA*F3743*6D*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	5620736
	CA*F3743*6D*+TXV	A*VC950453BxB*	34,000	24,400	15.50	12.00	1,130	5696602
	CA*F3743*6D*+TXV	A*VC80805C*B*	34,000	24,400	16.00	12.50	1,190	6497670
	CA*F3743*6D*+TXV	A*VC950704CXB*	34,000	24,400	16.00	12.50	1,150	6497671
	CA*F3743*6D*+TXV	A*VC950905DXB*	34,000	24,400	16.00	12.50	1,150	6497672
	CA*F3743*6D*+TXV	A*VC951155DXB*	34,000	24,400	16.00	12.50	1,150	6497673
	CA*F3743*6D*+TXV	A*VM961005DXB*	34,000	24,400	16.00	12.50	1,150	6497674
	CA*F3743*6D*+TXV	A*VM961155DXB*	34,000	24,400	16.00	12.50	1,150	6497675
	CA*F3743*6D*+TXV	ADVC80805C*B*	34,000	24,400	16.00	12.50	1,190	6497676
	CA*F3743*6D*+TXV	G*VC80805C*B*	34,000	24,400	16.00	12.50	1,190	6497677
	CA*F3743*6D*+TXV	A*VM960603BxB*	34,000	24,400	15.50	12.00	1,130	6603420
	CA*F3743*6D*+TXV	G*VM960603BxB*	34,000	24,400	15.50	12.00	1,130	6603421
	CA*F4860*6D*+EEP+TXV		35,000	25,200	14.50	11.50	1,200	5357198
	CA*F4860*6D*+TXV	G*VC91155DXA*	35,000	25,200	15.50	12.20	1,100	3880423
	CA*F4860*6D*+TXV	A*VC80604B*B*	34,600	24,800	16.00	12.50	1,220	5039011
	CA*F4860*6D*+TXV	G*VC80604B*B*	34,600	24,800	16.00	12.50	1,220	5039221
	CA*F4860*6D*+TXV	G*VC950453BxB*	34,600	24,800	16.00	12.20	1,130	5620645
	CA*F4860*6D*+TXV	G*VC950704CXB*	34,600	24,800	16.00	12.30	1,100	5620653
	CA*F4860*6D*+TXV	A*VC950714CXB*	34,600	24,800	16.00	12.30	1,100	5620662
	CA*F4860*6D*+TXV	G*VC950714CXB*	34,600	24,800	16.00	12.30	1,100	5620663
	CA*F4860*6D*+TXV	G*VC950905CXB*	35,000	25,200	15.50	12.00	1,150	5620668
	CA*F4860*6D*+TXV	G*VC950905DXB*	35,000	25,200	16.00	12.50	1,150	5620675
	CA*F4860*6D*+TXV	A*VC950915DXB*	35,000	25,200	16.00	12.50	1,150	5620681
	CA*F4860*6D*+TXV	G*VC950915DXB*	35,000	25,200	16.00	12.50	1,150	5620682
	CA*F4860*6D*+TXV	G*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	5620685
	CA*F4860*6D*+TXV	G*VM960603BxB*	34,600	24,800	16.00	12.20	1,130	5620689
	CA*F4860*6D*+TXV	A*VM960604CXB*	34,600	24,800	16.00	12.30	1,100	5620698
	CA*F4860*6D*+TXV	G*VM960604CXB*	34,600	24,800	16.00	12.30	1,100	5620699
	CA*F4860*6D*+TXV	G*VM960805CXB*	35,000	25,200	15.50	12.00	1,150	5620712
	CA*F4860*6D*+TXV	G*VM960805DXB*	35,000	25,200	16.00	12.50	1,150	5620721
	CA*F4860*6D*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	5620729
	CA*F4860*6D*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	5620737
	CA*F4860*6D*+TXV	A*VC80805C*B*	35,000	25,200	16.00	12.50	1,190	6497678
	CA*F4860*6D*+TXV	A*VC950453BxB*	35,000	25,200	16.00	12.20	1,130	6497679
	CA*F4860*6D*+TXV	A*VC950704CXB*	34,600	24,800	16.00	12.20	1,100	6497680
	CA*F4860*6D*+TXV	A*VC950905CXB*	35,000	25,200	15.50	12.00	1,150	6497681
	CA*F4860*6D*+TXV	A*VC950905DXB*	35,000	25,200	16.00	12.50	1,150	6497682
	CA*F4860*6D*+TXV	A*VC951155DXB*	35,000	25,200	16.00	12.50	1,150	6497683
	CA*F4860*6D*+TXV	A*VM960603BxB*	35,000	25,200	16.00	12.20	1,130	6497684
	CA*F4860*6D*+TXV	A*VM960805CXB*	35,000	25,200	15.50	12.00	1,150	6497685
	CA*F4860*6D*+TXV	A*VM960805DXB*	35,000	25,200	15.50	12.00	1,150	6497686
	CA*F4860*6D*+TXV	A*VM961005DXB*	35,000	25,200	16.00	12.50	1,150	6497687
	CA*F4860*6D*+TXV	A*VM961155DXB*	35,000	25,200	16.00	12.50	1,150	6497688
	CA*F4860*6D*+TXV	ADVC80805C*B*	35,000	25,200	16.00	12.50	1,190	6497689
	CA*F4860*6D*+TXV	G*VC80805C*B*	35,000	25,200	16.00	12.50	1,190	6497690
	CA*F4961*6D*+TXV	A*VM960805CXB*	35,000	25,200	16.00	12.50	1,200	5620713
	CA*F4961*6D*+TXV	G*VM960805CXB*	35,000	25,200	16.00	12.50	1,200	5620714
CAPT3743*4A*	A*VM960603BxB*	34,000	24,400	15.50	12.00	1,130	6603422	
CAPT3743*4A*	G*VM960603BxB*	34,000	24,400	15.50	12.00	1,130	6603423	

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0361A* (cont.)	CHPF3642C6C*+MBVC1600**-1A*+TXV		34,600	24,800	16.00	12.50	1,200	3654024
	CHPF3642C6C*+TXV	G*VC80604B*B*	34,000	24,400	15.50	12.00	1,220	5038934
	CHPF3642C6C*+TXV	A*VC80604B*B*	34,000	24,400	15.50	12.00	1,220	5039093
	CHPF3642C6C*+TXV	G*VC950453BXB*	34,000	24,400	15.50	12.00	1,130	5620646
	CHPF3642C6C*+TXV	G*VC950704CXB*	34,600	24,800	16.00	12.00	1,100	5620654
	CHPF3642C6C*+TXV	G*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	5620669
	CHPF3642C6C*+TXV	G*VM960603BXB*	34,000	24,400	15.50	12.00	1,130	5620690
	CHPF3642C6C*+TXV	A*VM960604CXB*	34,600	24,800	16.00	12.00	1,100	5620700
	CHPF3642C6C*+TXV	G*VM960604CXB*	34,600	24,800	16.00	12.00	1,100	5620701
	CHPF3642C6C*+TXV	G*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	5620715
	CHPF3642C6C*+TXV	G*VM960805DXB*	34,600	24,800	16.00	12.50	1,150	5620722
	CHPF3642C6C*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	5620730
	CHPF3642C6C*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	5620738
	CHPF3642C6C*+TXV	A*VC950453BXB*	34,000	24,400	15.50	12.00	1,130	5696601
	CHPF3642C6C*+TXV	A*VC80805C*B*	34,600	24,800	16.00	12.50	1,190	6497691
	CHPF3642C6C*+TXV	A*VC950704CXB*	34,600	24,800	16.00	12.00	1,100	6497692
	CHPF3642C6C*+TXV	G*VC80805C*B*	34,600	24,800	16.00	12.50	1,190	6497693
	CHPF3642D6C*+MBVC2000**-1A*+TXV		35,000	25,200	16.00	12.80	1,200	3654036
	CHPF3642D6C*+TXV	G*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	5620670
	CHPF3642D6C*+TXV	G*VC950905DXB*	34,600	24,800	16.00	12.50	1,150	5620676
	CHPF3642D6C*+TXV	G*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	5620686
	CHPF3642D6C*+TXV	G*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	5620716
	CHPF3642D6C*+TXV	G*VM960805DXB*	34,600	24,800	16.00	12.50	1,150	5620723
	CHPF3642D6C*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	5620731
	CHPF3642D6C*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	5620739
	CHPF3642D6C*+TXV	A*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	6497694
	CHPF3642D6C*+TXV	A*VC950905DXB*	34,600	24,800	16.00	12.50	1,150	6497695
	CHPF3642D6C*+TXV	A*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	6497696
	CHPF3642D6C*+TXV	A*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	6497697
	CHPF3642D6C*+TXV	A*VM960805DXB*	34,600	24,800	16.00	12.00	1,150	6497698
	CHPF3642D6C*+TXV	A*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	6497699
	CHPF3642D6C*+TXV	A*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	6497700
	CHPF3743C6B*+EEP+TXV		34,000	24,400	14.50	11.50	1,200	5357199
	CHPF3743C6B*+MBVC1600**-1A*+TXV		34,600	24,800	16.00	12.50	1,200	3654042
	CHPF3743C6B*+MBVC2000**-1A*+TXV		35,000	25,200	16.00	12.80	1,200	6497701
	CHPF3743C6B*+TXV	G*VC80604B*B*	34,000	24,400	15.50	12.00	1,220	5038935
	CHPF3743C6B*+TXV	A*VC80604B*B*	34,000	24,400	15.50	12.00	1,220	5039222
	CHPF3743C6B*+TXV	G*VC950453BXB*	34,000	24,400	16.00	12.50	1,130	5620647
	CHPF3743C6B*+TXV	G*VC950704CXB*	34,600	24,800	16.00	12.00	1,100	5620655
	CHPF3743C6B*+TXV	G*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	5620671
	CHPF3743C6B*+TXV	G*VM960603BXB*	34,000	24,400	16.00	12.50	1,130	5620691
	CHPF3743C6B*+TXV	A*VM960604CXB*	34,600	24,800	16.00	12.00	1,100	5620702
CHPF3743C6B*+TXV	G*VM960604CXB*	34,600	24,800	16.00	12.00	1,100	5620703	
CHPF3743C6B*+TXV	G*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	5620717	
CHPF3743C6B*+TXV	G*VM960805DXB*	34,600	24,800	16.00	12.50	1,150	5620724	
CHPF3743C6B*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	5620732	
CHPF3743C6B*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	5620740	
CHPF3743C6B*+TXV	A*VC80805C*B*	34,600	24,800	16.00	12.50	1,190	6497702	
CHPF3743C6B*+TXV	A*VC950453BXB*	34,000	24,400	16.00	12.20	1,130	6497703	

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0361A* (cont.)	CHPF3743C6B*+TXV	A*VC950704CXB*	34,600	24,800	16.00	12.00	1,100	6497704
	CHPF3743C6B*+TXV	A*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	6497705
	CHPF3743C6B*+TXV	A*VC950905DXB*	34,600	24,800	16.00	12.50	1,150	6497706
	CHPF3743C6B*+TXV	A*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	6497707
	CHPF3743C6B*+TXV	A*VM960603BXB*	34,000	24,400	16.00	12.20	1,130	6497708
	CHPF3743C6B*+TXV	A*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	6497709
	CHPF3743C6B*+TXV	A*VM960805DXB*	34,600	24,800	16.00	12.00	1,150	6497710
	CHPF3743C6B*+TXV	A*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	6497711
	CHPF3743C6B*+TXV	A*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	6497712
	CHPF3743C6B*+TXV	G*VC80805C*B*	34,600	24,800	16.00	12.50	1,190	6497713
	CHPF3743D6B*+MBVC2000**-1A*+TXV		35,000	25,200	16.00	12.80	1,200	3654056
	CHPF3743D6B*+TXV	G*VC80604B*B*	34,000	24,400	16.00	12.50	1,220	5038828
	CHPF3743D6B*+TXV	A*VC80604B*B*	34,000	24,400	16.00	12.50	1,220	5039094
	CHPF3743D6B*+TXV	G*VC950453BXB*	34,000	24,400	16.00	12.50	1,130	5620648
	CHPF3743D6B*+TXV	G*VC950704CXB*	34,000	24,400	16.00	12.50	1,100	5620656
	CHPF3743D6B*+TXV	G*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	5620672
	CHPF3743D6B*+TXV	G*VC950905DXB*	34,600	24,800	16.00	12.50	1,150	5620677
	CHPF3743D6B*+TXV	G*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	5620687
	CHPF3743D6B*+TXV	G*VM960603BXB*	34,000	24,400	16.00	12.50	1,130	5620692
	CHPF3743D6B*+TXV	A*VM960604CXB*	34,000	24,400	16.00	12.30	1,100	5620704
	CHPF3743D6B*+TXV	G*VM960604CXB*	34,000	24,400	16.00	12.50	1,100	5620705
	CHPF3743D6B*+TXV	G*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	5620718
	CHPF3743D6B*+TXV	G*VM960805DXB*	34,600	24,800	16.00	12.50	1,150	5620725
	CHPF3743D6B*+TXV	G*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	5620733
	CHPF3743D6B*+TXV	G*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	5620741
	CHPF3743D6B*+TXV	A*VC80805C*B*	34,000	24,400	16.00	12.50	1,190	6497714
	CHPF3743D6B*+TXV	A*VC950453BXB*	34,000	24,400	16.00	12.20	1,130	6497715
	CHPF3743D6B*+TXV	A*VC950704CXB*	34,000	24,400	16.00	12.20	1,100	6497716
	CHPF3743D6B*+TXV	A*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	6497717
	CHPF3743D6B*+TXV	A*VC950905DXB*	34,600	24,800	16.00	12.50	1,150	6497718
	CHPF3743D6B*+TXV	A*VC951155DXB*	34,600	24,800	16.00	12.50	1,150	6497719
	CHPF3743D6B*+TXV	A*VM960603BXB*	34,000	24,400	16.00	12.20	1,130	6497720
	CHPF3743D6B*+TXV	A*VM960805CXB*	34,600	24,800	16.00	12.00	1,150	6497721
	CHPF3743D6B*+TXV	A*VM960805DXB*	34,600	24,800	16.00	12.00	1,150	6497722
	CHPF3743D6B*+TXV	A*VM961005DXB*	34,600	24,800	16.00	12.50	1,150	6497723
	CHPF3743D6B*+TXV	A*VM961155DXB*	34,600	24,800	16.00	12.50	1,150	6497724
	CHPF3743D6B*+TXV	G*VC80805C*B*	34,000	24,400	16.00	12.50	1,190	6497725
	CHPF4860D6D*+EEP+TXV		35,000	25,200	14.50	11.50	1,200	5357200
	CHPF4860D6D*+TXV	G*VC80604B*B*	34,600	24,800	16.00	12.50	1,220	5038829
	CHPF4860D6D*+TXV	A*VC80604B*B*	34,600	24,800	16.00	12.50	1,220	5039095
	CHPF4860D6D*+TXV	G*VC950453BXB*	34,600	24,800	16.00	12.50	1,130	5620649
	CHPF4860D6D*+TXV	G*VC950704CXB*	35,000	25,200	16.00	12.50	1,100	5620657
	CHPF4860D6D*+TXV	G*VC950905CXB*	35,000	25,200	16.00	12.00	1,150	5620673
	CHPF4860D6D*+TXV	G*VC950905DXB*	35,000	25,200	16.00	12.50	1,150	5620678
	CHPF4860D6D*+TXV	G*VC951155DXB*	35,000	25,200	16.00	12.50	1,150	5620688
	CHPF4860D6D*+TXV	G*VM960603BXB*	34,600	24,800	16.00	12.50	1,130	5620693
	CHPF4860D6D*+TXV	A*VM960604CXB*	35,000	25,200	16.00	12.30	1,100	5620706
	CHPF4860D6D*+TXV	G*VM960604CXB*	35,000	25,200	16.00	12.50	1,100	5620707
	CHPF4860D6D*+TXV	G*VM960805CXB*	35,000	25,200	16.00	12.00	1,150	5620719

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0361A* (cont.)	CHPF4860D6D*+TXV	G*VM960805DXB*	35,000	25,200	16.00	12.50	1,150	5620726
	CHPF4860D6D*+TXV	G*VM961005DXB*	35,000	25,200	16.00	12.50	1,150	5620734
	CHPF4860D6D*+TXV	G*VM961155DXB*	35,000	25,200	16.00	12.50	1,150	5620742
	CHPF4860D6D*+TXV	A*VC80805C*B*	34,600	24,800	16.00	12.50	1,190	6497726
	CHPF4860D6D*+TXV	A*VC950453BXB*	34,600	24,800	16.00	12.20	1,130	6497727
	CHPF4860D6D*+TXV	A*VC950704CXB*	35,000	25,200	16.00	12.20	1,100	6497728
	CHPF4860D6D*+TXV	A*VC950905CXB*	35,000	25,200	16.00	12.00	1,150	6497729
	CHPF4860D6D*+TXV	A*VC950905DXB*	35,000	25,200	16.00	12.50	1,150	6497730
	CHPF4860D6D*+TXV	A*VC951155DXB*	35,000	25,200	16.00	12.50	1,150	6497731
	CHPF4860D6D*+TXV	A*VM960603BXB*	34,600	24,800	16.00	12.20	1,130	6497732
	CHPF4860D6D*+TXV	A*VM960805CXB*	35,000	25,200	16.00	12.00	1,150	6497733
	CHPF4860D6D*+TXV	A*VM960805DXB*	35,000	25,200	16.00	12.00	1,150	6497734
	CHPF4860D6D*+TXV	A*VM961005DXB*	35,000	25,200	16.00	12.50	1,150	6497735
	CHPF4860D6D*+TXV	A*VM961155DXB*	35,000	25,200	16.00	12.50	1,150	6497736
	CHPF4860D6D*+TXV	G*VC80805C*B*	34,600	24,800	16.00	12.50	1,190	6497737
	CSCF3642N6D*+TXV	G*VC950453BXB*	34,000	24,400	16.00	12.00	1,200	5620650
	CSCF3642N6D*+TXV	A*VC950453BXB*	34,000	24,400	16.00	12.00	1,200	6497738
	CSCF3642N6D*+TXV	A*VC950704CXB*	34,200	24,600	16.00	12.00	1,225	6497739
	CSCF3642N6D*+TXV	A*VC950905CXB*	34,600	24,800	16.00	12.00	1,150	6497740
	CSCF3642N6D*+TXV	A*VC950905DXB*	34,600	24,800	16.00	12.00	1,150	6497741
CSCF3642N6D*+TXV	A*VC951155DXB*	34,600	24,800	16.00	12.00	1,225	6497742	
CSCF4860N6D*+EEP+TXV		35,000	25,200	14.50	11.50	1,200	5357202	
DSXC16 0481B*	AVPTC48D14A*		46,000	34,600	15.50	12.00	1,575	5924365
	AVPTC60D14A*		45,500	34,200	16.00	12.00	1,430	6687799
	CA*F4860*6D*+EEP+TXV		47,000	35,200	14.50	12.00	1,675	5357203
	CA*F4860*6D*+MBVC1600**-1A*+TXV		46,000	34,600	15.00	12.00	1,600	6497743
	CA*F4860*6D*+MBVC2000**-1A*+TXV		47,000	35,200	16.00	12.50	1,600	4559576
	CA*F4860*6D*+TXV	G*VC91155DXA*	45,500	34,200	15.50	11.50	1,400	4172484
	CA*F4860*6D*+TXV	A*VC81005C*B*	46,000	34,600	16.00	12.00	1,370	5038813
	CA*F4860*6D*+TXV	A*VC80805C*B*	46,000	34,600	16.00	12.30	1,390	5038832
	CA*F4860*6D*+TXV	G*VC80604B*B*	45,500	34,200	15.00	12.00	1,400	5039096
	CA*F4860*6D*+TXV	G*VC81005C*B*	46,000	34,600	16.00	12.00	1,370	5039097
	CA*F4860*6D*+TXV	ADVC80805C*B*	46,000	34,600	16.00	12.30	1,380	5039098
	CA*F4860*6D*+TXV	ADVC81005C*B*	46,000	34,600	16.00	12.00	1,410	5039099
	CA*F4860*6D*+TXV	A*VC80604B*B*	45,500	34,200	15.00	12.00	1,400	5039115
	CA*F4860*6D*+TXV	G*VC80805C*B*	46,000	34,600	16.00	12.30	1,390	5039223
	CA*F4860*6D*+TXV	A*VC950704CXB*	45,500	34,200	15.00	12.00	1,400	5620743
	CA*F4860*6D*+TXV	G*VC950704CXB*	45,500	34,200	15.00	12.00	1,400	5620744
	CA*F4860*6D*+TXV	A*VC950905DXB*	46,000	34,600	16.00	12.30	1,400	5620749
	CA*F4860*6D*+TXV	G*VC950905DXB*	46,000	34,600	16.00	12.30	1,400	5620750
	CA*F4860*6D*+TXV	A*VC951155DXB*	46,000	34,600	16.00	12.50	1,400	5620755
	CA*F4860*6D*+TXV	G*VC951155DXB*	46,000	34,600	16.00	12.30	1,400	5620756
	CA*F4860*6D*+TXV	A*VM961005DXB*	46,000	34,600	16.00	12.50	1,400	5620761
	CA*F4860*6D*+TXV	G*VM961005DXB*	46,000	34,600	16.00	12.30	1,400	5620762
	CA*F4860*6D*+TXV	A*VM961155DXB*	46,000	34,600	16.00	12.50	1,400	5620767
	CA*F4860*6D*+TXV	G*VM961155DXB*	46,000	34,600	16.00	12.30	1,400	5620768
CA*F4860*6D*+TXV	A*VC950915DXB*	46,000	34,600	15.00	11.50	1,400	6497744	

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0481B* (cont.)	CA*F4860*6D*+TXV	G*VC950905CXB*	46,000	34,600	15.00	11.50	1,400	6497745
	CA*F4860*6D*+TXV	G*VC950915DXB*	46,000	34,600	15.00	11.50	1,400	6497746
	CA*F4961*6D*+EEP+TXV		48,000	36,000	14.50	12.00	1,675	5357204
	CA*F4961*6D*+MBVC1600**-1A*+TXV		46,000	34,600	15.00	12.00	1,400	4431661
	CA*F4961*6D*+MBVC2000**-1A*+TXV		47,000	35,200	16.00	12.50	1,400	4431662
	CA*F4961*6D*+TXV	G*VC91155DXA*	45,500	34,200	15.50	12.00	1,350	4431704
	CA*F4961*6D*+TXV	ADVC80805C*B*	47,000	35,200	16.00	12.50	1,380	5038811
	CA*F4961*6D*+TXV	A*VC80805C*B*	47,000	35,200	16.00	12.50	1,390	5038814
	CA*F4961*6D*+TXV	G*VC80805C*B*	47,000	35,200	16.00	12.50	1,390	5038933
	CA*F4961*6D*+TXV	ADVC81005C*B*	46,500	35,000	16.00	12.00	1,410	5038936
	CA*F4961*6D*+TXV	G*VC81005C*B*	46,500	35,000	16.00	12.00	1,370	5039012
	CA*F4961*6D*+TXV	G*VC80604B*B*	46,000	34,600	16.00	12.30	1,400	5039100
	CA*F4961*6D*+TXV	A*VC80604B*B*	46,000	34,600	16.00	12.30	1,400	5039101
	CA*F4961*6D*+TXV	A*VC81005C*B*	46,500	35,000	16.00	12.00	1,370	5039225
	CA*F4961*6D*+TXV	A*VC950704CXB*	46,500	35,000	15.00	12.00	1,350	5620745
	CA*F4961*6D*+TXV	G*VC950704CXB*	46,500	35,000	15.00	12.00	1,350	5620746
	CA*F4961*6D*+TXV	A*VC950905DXB*	47,000	35,200	16.00	12.50	1,350	5620751
	CA*F4961*6D*+TXV	G*VC950905DXB*	47,000	35,200	16.00	12.50	1,350	5620752
	CA*F4961*6D*+TXV	A*VC951155DXB*	47,000	35,200	16.00	12.50	1,350	5620757
	CA*F4961*6D*+TXV	G*VC951155DXB*	47,000	35,200	16.00	12.50	1,350	5620758
	CA*F4961*6D*+TXV	A*VM961005DXB*	47,000	35,200	16.00	12.50	1,350	5620763
	CA*F4961*6D*+TXV	G*VM961005DXB*	47,000	35,200	16.00	12.50	1,350	5620764
	CA*F4961*6D*+TXV	A*VM961155DXB*	47,000	35,200	16.00	12.50	1,350	5620769
	CA*F4961*6D*+TXV	G*VM961155DXB*	47,000	35,200	16.00	12.50	1,350	5620770
	CA*F4961*6D*+TXV	A*VM960805CXB*	47,000	35,200	15.50	12.00	1,350	6497747
	CHPF4860D6D*+EEP+TXV		48,000	36,000	14.50	12.00	1,675	5357205
	CHPF4860D6D*+MBVC1600**-1A*+TXV		46,000	34,600	15.00	12.00	1,400	4172507
	CHPF4860D6D*+MBVC2000**-1A*+TXV		47,000	35,200	16.00	12.50	1,400	4172508
	CHPF4860D6D*+TXV	G*VC80604B*B*	45,500	34,200	15.50	12.00	1,400	5038812
	CHPF4860D6D*+TXV	G*VC81005C*B*	45,500	34,200	15.50	12.00	1,370	5038830
	CHPF4860D6D*+TXV	A*VC80805C*B*	45,500	34,200	15.50	12.00	1,390	5038833
	CHPF4860D6D*+TXV	A*VC80604B*B*	45,500	34,200	15.50	12.00	1,400	5039102
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,500	34,200	15.50	12.00	1,390	5039224
	CHPF4860D6D*+TXV	A*VC81005C*B*	45,500	34,200	15.50	12.00	1,370	5039226
	CHPF4860D6D*+TXV	A*VC950704CXB*	46,000	34,600	15.50	12.00	1,350	5620747
	CHPF4860D6D*+TXV	G*VC950704CXB*	46,000	34,600	15.50	12.00	1,350	5620748
	CHPF4860D6D*+TXV	A*VC950905DXB*	47,000	35,200	16.00	12.30	1,350	5620753
	CHPF4860D6D*+TXV	G*VC950905DXB*	47,000	35,200	16.00	12.30	1,350	5620754
	CHPF4860D6D*+TXV	A*VC951155DXB*	47,000	35,200	16.00	12.30	1,350	5620759
	CHPF4860D6D*+TXV	G*VC951155DXB*	47,000	35,200	16.00	12.30	1,350	5620760
	CHPF4860D6D*+TXV	A*VM961005DXB*	47,000	35,200	16.00	12.30	1,350	5620765
	CHPF4860D6D*+TXV	G*VM961005DXB*	47,000	35,200	16.00	12.30	1,350	5620766
	CHPF4860D6D*+TXV	A*VM961155DXB*	47,000	35,200	16.00	12.30	1,350	5620771
	CHPF4860D6D*+TXV	G*VM961155DXB*	47,000	35,200	16.00	12.30	1,350	5620772
	CHPF4860D6D*+TXV	G*VC950905CXB*	47,000	35,200	16.00	12.25	1,350	6497748
	CSCF4860N6D*+EEP+TXV		48,000	36,000	14.50	12.00	1,675	5357206

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0601B*	AVPTC60D14A*		57,000	42,500	15.50	12.00	1,780	5924366
	CA*F4860*6D*+MBVC2000**-1A*+TXV		55,500	41,000	15.50	12.00	1,800	3880338
	CA*F4860*6D*+TXV	G*VC91155DXA*	55,500	41,000	15.50	12.00	1,575	3880462
	CA*F4860*6D*+TXV	ADVC81005C*B*	55,500	41,000	15.50	12.00	1,550	5038834
	CA*F4860*6D*+TXV	A*VC80805C*B*	55,500	41,000	15.50	12.00	1,590	5038937
	CA*F4860*6D*+TXV	A*VC81005C*B*	55,500	41,000	15.50	12.00	1,610	5038965
	CA*F4860*6D*+TXV	G*VC80805C*B*	55,500	41,000	15.50	12.00	1,590	5039104
	CA*F4860*6D*+TXV	ADVC80805C*B*	55,500	41,000	15.50	12.00	1,580	5039105
	CA*F4860*6D*+TXV	G*VC81005C*B*	55,500	41,000	15.50	12.00	1,610	5039227
	CA*F4860*6D*+TXV	A*VC950905CXB*	55,500	41,000	15.00	11.50	1,575	5620773
	CA*F4860*6D*+TXV	G*VC950905CXB*	55,500	41,000	15.00	11.50	1,575	5620774
	CA*F4860*6D*+TXV	A*VC950905DXB*	55,500	41,000	15.50	12.00	1,575	5620779
	CA*F4860*6D*+TXV	G*VC950905DXB*	55,500	41,000	15.50	12.00	1,575	5620780
	CA*F4860*6D*+TXV	A*VC950915DXB*	55,500	41,000	15.50	11.50	1,575	5620785
	CA*F4860*6D*+TXV	G*VC950915DXB*	55,500	41,000	15.50	11.50	1,575	5620786
	CA*F4860*6D*+TXV	A*VC951155DXB*	55,500	41,000	15.50	12.00	1,575	5620789
	CA*F4860*6D*+TXV	G*VC951155DXB*	55,500	41,000	15.50	12.00	1,575	5620790
	CA*F4860*6D*+TXV	A*VM960805CXB*	55,500	41,000	15.00	11.50	1,575	5620795
	CA*F4860*6D*+TXV	G*VM960805CXB*	55,500	41,000	15.00	11.50	1,575	5620796
	CA*F4860*6D*+TXV	A*VM960805DXB*	55,500	41,000	15.50	11.50	1,575	5620801
	CA*F4860*6D*+TXV	G*VM960805DXB*	55,500	41,000	15.50	11.50	1,575	5620802
	CA*F4860*6D*+TXV	A*VM961005DXB*	55,500	41,000	15.50	12.00	1,575	5620807
	CA*F4860*6D*+TXV	G*VM961005DXB*	55,500	41,000	15.50	12.00	1,575	5620808
	CA*F4860*6D*+TXV	A*VM961155DXB*	55,500	41,000	15.50	12.00	1,575	5620813
	CA*F4860*6D*+TXV	G*VM961155DXB*	55,500	41,000	15.50	12.00	1,575	5620814
	CA*F4961*6D*+EEP+TXV		56,000	41,500	14.00	11.80	1,550	5357207
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	42,500	16.00	12.30	1,800	4431664
	CA*F4961*6D*+TXV	G*VC91155DXA*	56,000	41,500	15.50	12.00	1,575	4431724
	CA*F4961*6D*+TXV	G*VC80805C*B*	56,000	41,500	15.50	12.30	1,590	5038815
	CA*F4961*6D*+TXV	A*VC81005C*B*	56,000	41,500	15.50	12.00	1,610	5038835
	CA*F4961*6D*+TXV	G*VC81005C*B*	56,000	41,500	15.50	12.00	1,610	5038964
	CA*F4961*6D*+TXV	A*VC80805C*B*	56,000	41,500	15.50	12.30	1,590	5038966
	CA*F4961*6D*+TXV	ADVC81005C*B*	56,000	41,500	15.50	12.00	1,550	5039013
	CA*F4961*6D*+TXV	ADVC80805C*B*	56,000	41,500	15.50	12.30	1,580	5039116
	CA*F4961*6D*+TXV	A*VC950905CXB*	56,000	41,500	15.50	11.50	1,575	5620775
	CA*F4961*6D*+TXV	G*VC950905CXB*	56,000	41,500	15.50	11.50	1,575	5620776
	CA*F4961*6D*+TXV	A*VC950905DXB*	56,000	41,500	15.50	12.30	1,575	5620781
	CA*F4961*6D*+TXV	G*VC950905DXB*	56,000	41,500	15.50	12.30	1,575	5620782
	CA*F4961*6D*+TXV	A*VC950915DXB*	56,000	41,500	15.50	12.30	1,575	5620787
	CA*F4961*6D*+TXV	G*VC950915DXB*	56,000	41,500	15.50	12.30	1,575	5620788
CA*F4961*6D*+TXV	A*VC951155DXB*	56,000	41,500	15.50	12.00	1,575	5620791	
CA*F4961*6D*+TXV	G*VC951155DXB*	56,000	41,500	15.50	12.00	1,575	5620792	
CA*F4961*6D*+TXV	A*VM960805CXB*	56,000	41,500	15.50	11.50	1,575	5620797	
CA*F4961*6D*+TXV	G*VM960805CXB*	56,000	41,500	15.50	11.50	1,575	5620798	
CA*F4961*6D*+TXV	A*VM960805DXB*	56,000	41,500	15.50	12.30	1,575	5620803	

See Notes on Page 29.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DSXC16 0601B* (cont.)	CA*F4961*6D*+TXV	G*VM960805DXB*	56,000	41,500	15.50	12.30	1,575	5620804
	CA*F4961*6D*+TXV	A*VM961005DXB*	56,000	41,500	15.50	12.00	1,575	5620809
	CA*F4961*6D*+TXV	G*VM961005DXB*	56,000	41,500	15.50	12.00	1,575	5620810
	CA*F4961*6D*+TXV	A*VM961155DXB*	56,000	41,500	15.50	12.00	1,575	5620815
	CA*F4961*6D*+TXV	G*VM961155DXB*	56,000	41,500	15.50	12.00	1,575	5620816
	CHPF4860D6D*+EEP+TXV		56,000	41,500	14.00	11.80	1,550	5357208
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	42,500	15.50	12.30	1,800	3798903
	CHPF4860D6D*+TXV	A*VC81005C*B*	56,000	41,500	15.50	12.00	1,610	5038967
	CHPF4860D6D*+TXV	G*VC80805C*B*	56,000	41,500	15.50	12.30	1,590	5039014
	CHPF4860D6D*+TXV	A*VC80805C*B*	56,000	41,500	15.50	12.30	1,590	5039106
	CHPF4860D6D*+TXV	G*VC81005C*B*	56,000	41,500	15.50	12.00	1,610	5039117
	CHPF4860D6D*+TXV	A*VC950905CXB*	56,000	41,500	15.50	11.50	1,575	5620777
	CHPF4860D6D*+TXV	G*VC950905CXB*	56,000	41,500	15.50	11.50	1,575	5620778
	CHPF4860D6D*+TXV	A*VC950905DXB*	56,000	41,500	15.50	12.30	1,575	5620783
	CHPF4860D6D*+TXV	G*VC950905DXB*	56,000	41,500	15.50	12.30	1,575	5620784
	CHPF4860D6D*+TXV	A*VC951155DXB*	56,000	41,500	15.50	12.00	1,575	5620793
	CHPF4860D6D*+TXV	G*VC951155DXB*	56,000	41,500	15.50	12.00	1,575	5620794
	CHPF4860D6D*+TXV	A*VM960805CXB*	56,000	41,500	15.50	11.50	1,575	5620799
	CHPF4860D6D*+TXV	G*VM960805CXB*	56,000	41,500	15.50	11.50	1,575	5620800
	CHPF4860D6D*+TXV	A*VM960805DXB*	56,000	41,500	15.50	11.50	1,575	5620805
	CHPF4860D6D*+TXV	G*VM960805DXB*	56,000	41,500	15.50	11.50	1,575	5620806
	CHPF4860D6D*+TXV	A*VM961005DXB*	56,000	41,500	15.50	12.00	1,575	5620811
	CHPF4860D6D*+TXV	G*VM961005DXB*	56,000	41,500	15.50	12.00	1,575	5620812
	CHPF4860D6D*+TXV	A*VM961155DXB*	56,000	41,500	15.50	12.00	1,575	5620817
	CHPF4860D6D*+TXV	G*VM961155DXB*	56,000	41,500	15.50	12.00	1,575	5620818
	CSCF4860N6D*+EEP+TXV		56,000	41,500	14.00	11.80	1,550	5357209

¹ BTU/h


² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DIMENSIONS

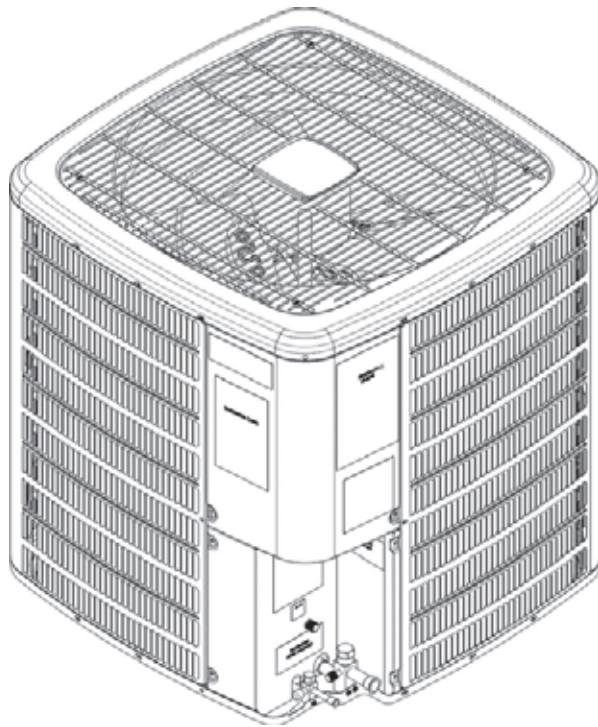

MODEL	DIMENSIONS		
	W"	D"	H"
DSXC160241A*	29	29	32¼
DSXC160361A*	29	29	38¼
DSXC160481B*	35½	35½	36¼
DSXC160601B*	35½	35½	38¼

WIRING DIAGRAM

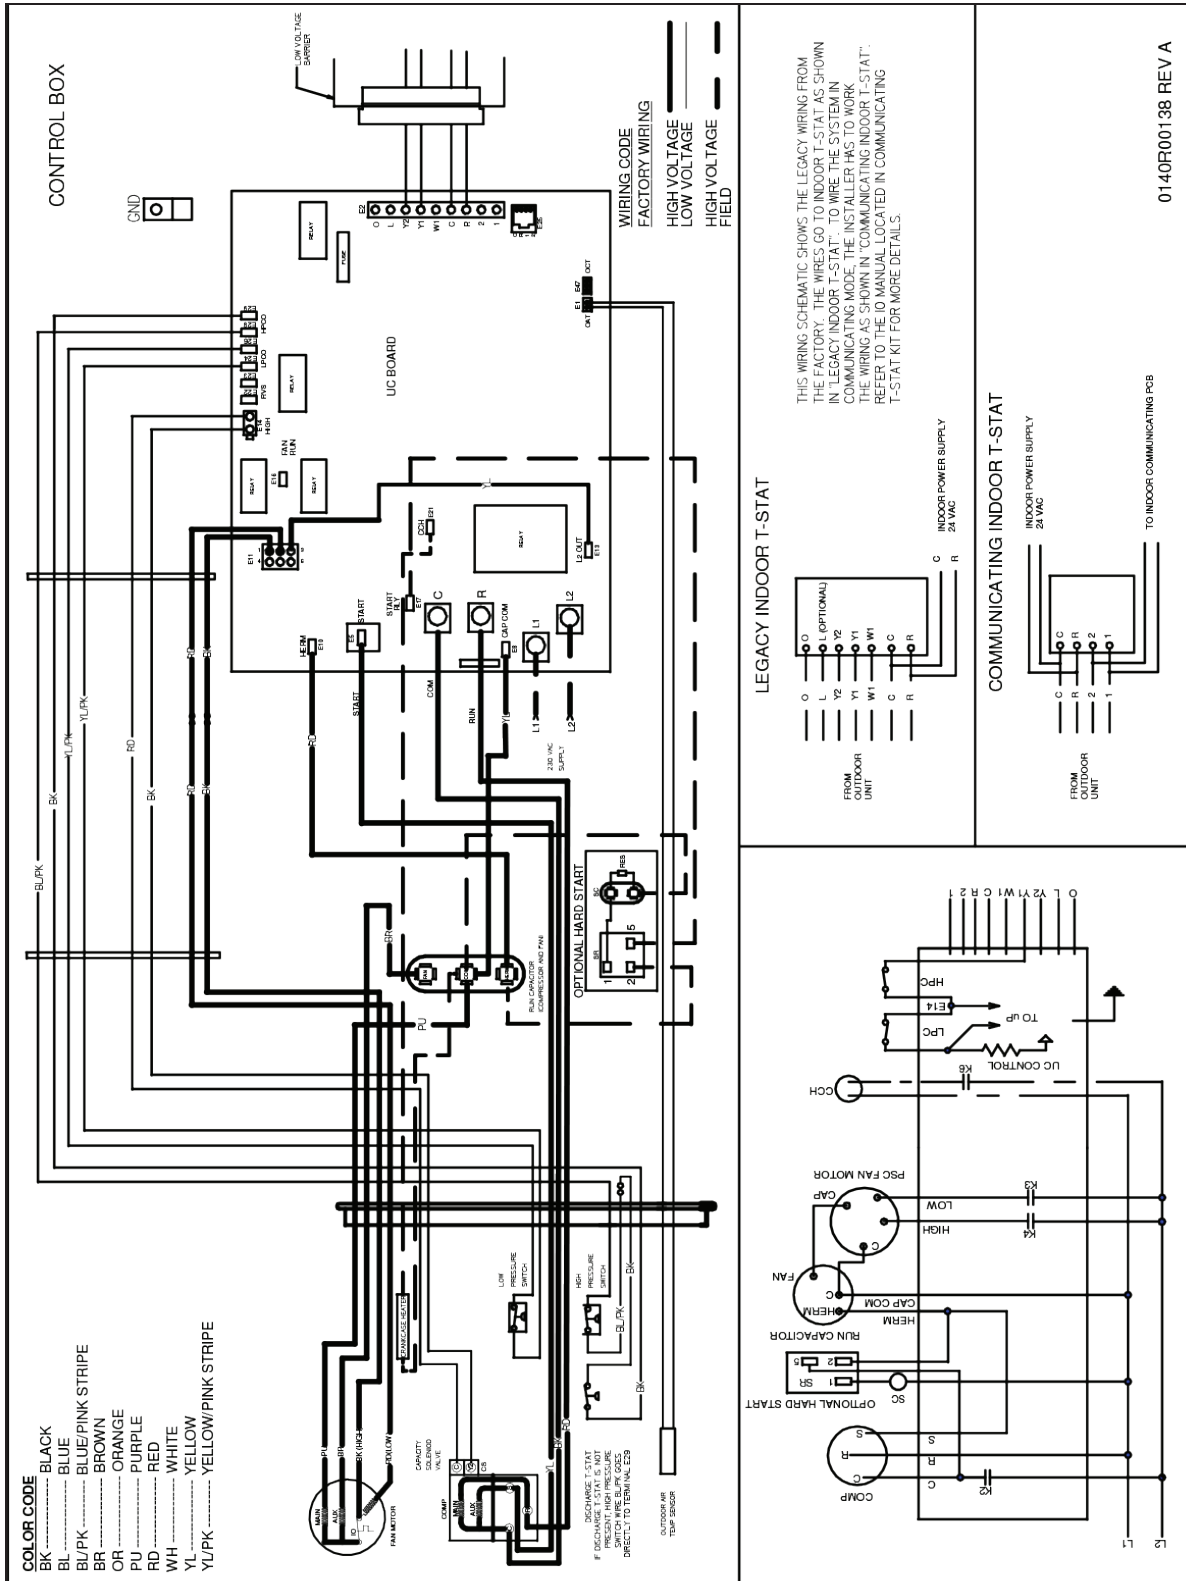

THIS WIRING SCHEMATIC SHOWS THE LEGACY WIRING FROM THE FACTORY. THE WIRES GO TO INDOOR T-STAT AS SHOWN IN "LEGACY INDOOR T-STAT". TO WIRE THE SYSTEM IN COMMUNICATING MODE, THE INSTALLER HAS TO WORK THE WIRING AS SHOWN IN "COMMUNICATING INDOOR T-STAT". REFER TO THE IO MANUAL LOCATED IN COMMUNICATING T-STAT KIT FOR MORE DETAILS.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

ACCESSORIES

MODEL	DESCRIPTION	DSXC16 024**	DSXC16 036**	DSXC16 048**	DSXC16 060**
ABK-20	Anchor Bracket Kit [^]	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X
B1141643 ¹	24V Transformer	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	
CSR-U-2	Hard-start Kit		X		
CSR-U-3	Hard-start Kit				X
FSK01A ²	Freeze Protection Kit	X	X	X	X
LSK02A	Liquid Line Solenoid Valve	X	X	X	X
OT18-60A ³	Outdoor Thermostat/Lockout Thermostat	X	X	X	X
TX2N4	TXV Kit	X			
TX2N4A	TXV Kit	X			
TX3N4 ⁴	TXV Kit		X		
TX5N4	TXV Kit			X	X

[^] Contains 20 brackets; four brackets needed to anchor unit to pad

¹ This component is included in the CTK01AA communicating thermostat kit.

² Installed on indoor coil

³ Available in 24V legacy mode only. This feature is integrated in the communicating mode.

Note: Maximum number of installed accessories at the same time is limited by the size of the unit's control box.