



Air Conditioning & Heating

# GPC14M

COOLING CAPACITY: 23,000 - 56,000 BTU/H

PACKAGED AIR CONDITIONER

14 SEER

2 THROUGH 5 TONS



### Contents

Nomenclature..... 2

Product Specifications..... 3

Expanded Cooling Data ..... 4

Airflow Data ..... 16

Heat Kit Electrical Data..... 17

Dimensions ..... 18

Wiring Diagrams ..... 19

Accessories ..... 20

### Standard Features


- Energy-efficient compressor
- ECM indoor blower motor
- Convertible airflow:  
horizontal or downflow
- Copper tube/aluminum fin condenser coil
- All-Aluminum evaporator coil
- Totally enclosed, permanently lubricated condenser fan motor
- Field-installed electric heat kits available
- AHRI Certified; ETL Listed

### Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive Architectural Gray powder-paint finish
- Fully insulated blower compartment with convenient access panels
- Louvered condenser coil protection
- One footprint; two heights



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration not required in California or Québec.

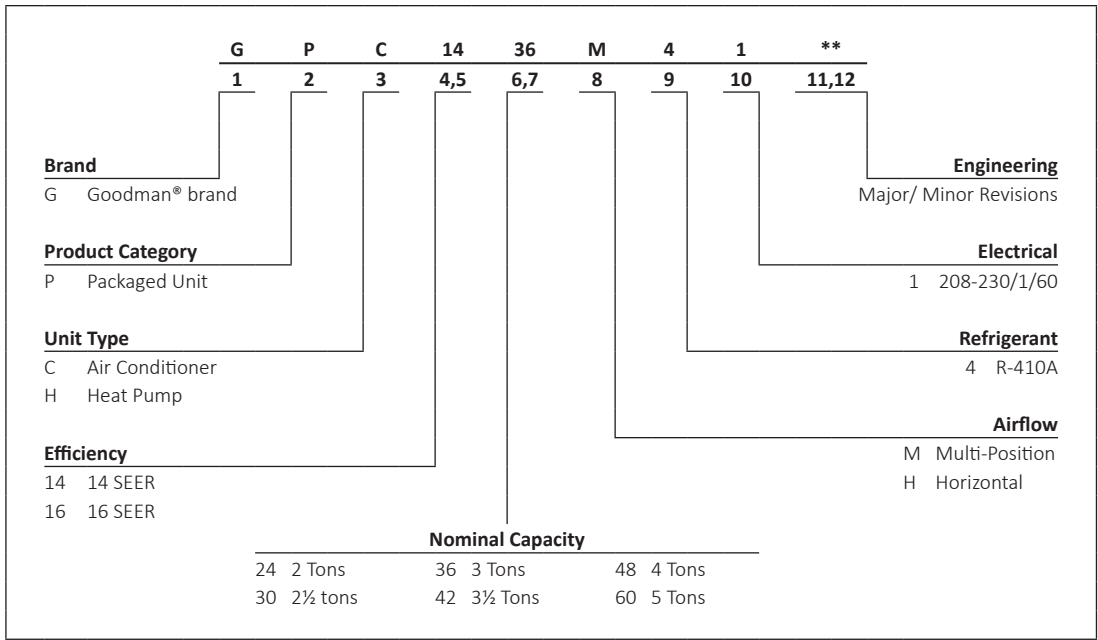

|  | GPC14<br>24M41A* | GPC14<br>30M41A* | GPC14<br>36M41A* | GPC14<br>42M41A* | GPC14<br>48M41A* | GPC14<br>60M41A* |
|--|------------------|------------------|------------------|------------------|------------------|------------------|
| <b>COOLING CAPACITY</b>                  |                  |                  |                  |                  |                  |                  |
| Total BTU/h                              | 23,000           | 28,600           | 35,000           | 40,000           | 46,500           | 56,000           |
| Sensible BTU/h                           | 17,700           | 21,800           | 27,600           | 29,600           | 36,200           | 41,000           |
| SEER / EER                               | 14 / 11.0        | 14 / 11.0        | 14 / 11.0        | 14 / 11.0        | 14 / 11.0        | 14 / 11.0        |
| Decibels                                 | 78.0             | 78.0             | 80.1             | 78.0             | 81.7             | 80.2             |
| AHRI Numbers                             | 7513338          | 7513342          | 7513339          | 7513340          | 7513341          | 7513343          |
| <b>EVAPORATOR MOTOR</b>                  |                  |                  |                  |                  |                  |                  |
| Type                                     | ECM              | ECM              | ECM              | ECM              | ECM              | ECM              |
| Nominal Cooling CFM                      | 800              | 1,000            | 1,200            | 1,325            | 1,600            | 1,700            |
| Wheel (DxW)                              | 10 x 9           | 10 x 9           | 10 x 9           | 10 x 9           | 10 x 9           | 10 x 9           |
| No. of Speeds                            | 5                | 5                | 5                | 5                | 5                | 5                |
| Horsepower - RPM                         | ½                | ½                | ½                | ½                | ¾                | 1.0              |
| <b>EVAPORATOR COIL</b>                   |                  |                  |                  |                  |                  |                  |
| Face Area (ft <sup>2</sup> )             | 4.50             | 4.50             | 4.50             | 4.50             | 6.17             | 6.17             |
| Rows Deep/ Fin per Inch                  | 4/ 14            | 4/ 14            | 4/ 14            | 4/ 14            | 4/ 14            | 4/ 14            |
| Drain Size (NPT)                         | ¾"               | ¾"               | ¾"               | ¾"               | ¾"               | ¾"               |
| Refrigerant Charge (oz.)                 | 86               | 80               | 77               | 95               | 108              | 177              |
| <b>CONDENSER FAN / COIL</b>              |                  |                  |                  |                  |                  |                  |
| Horsepower - RPM                         | ¼ - 815          | ¼ - 830          | ¼ - 1,075        | ¼ - 1,075        | ¼ - 1,075        | ½ - 1120         |
| Fan Diameter / # Fan Blades              | 22 / 3           | 22 / 3           | 22 / 3           | 22 / 3           | 22 / 3           | 22 / 3           |
| Face Area (ft <sup>2</sup> )             | 12.29            | 12.29            | 8.77             | 11.13            | 15.36            | 20.67            |
| Rows Deep/ Fins per Inch                 | 1 / 24           | 1 / 24           | 2 / 27           | 2 / 27           | 1 / 24           | 2 / 16           |
| <b>COMPRESSOR</b>                        |                  |                  |                  |                  |                  |                  |
| Quantity                                 | 1                | 1                | 1                | 1                | 1                | 1                |
| Type                                     | Rotary           | Scroll           | Scroll           | Scroll           | Scroll           | Scroll           |
| Stage                                    | Single           | Single           | Single           | Single           | Single           | Single           |
| <b>ELECTRICAL DATA</b>                   |                  |                  |                  |                  |                  |                  |
| Voltage-Phase                            | 208/230-1        | 208/230-1        | 208/230-1        | 208/230-1        | 208/230-1        | 208/230-1        |
| Compressor RLA/LRA                       | 7.7 / 37         | 14.1 / 73        | 16.7 / 79        | 17.9 / 112       | 19.9 / 109       | 25.0 / 134       |
| Indoor Blower FLA                        | 3.9              | 3.9              | 3.9              | 3.9              | 5.7              | 7.0              |
| Outdoor Fan FLA / LRA                    | 1.1 / 1.7        | 1.5 / 3.0        | 1.4 / 2.9        | 1.4 / 2.9        | 1.4 / 2.9        | 2.0 / 4.4        |
| Total Unit Amps                          | 12.7             | 19.5             | 22.0             | 23.2             | 27.0             | 34.0             |
| Min. Circuit Ampacity <sup>1</sup>       | 14.6             | 23.0             | 26.2             | 27.7             | 32.0             | 40.3             |
| Max. Overcurrent Protection <sup>2</sup> | 20 amps          | 35 amps          | 40 amps          | 45 amps          | 50 amps          | 60 amps          |
| <b>SHIP WEIGHT (LBS)</b>                 | 319              | 342              | 365              | 388              | 435              | 458              |

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |     |      |      |      |     |      |      |      |     | ENTERING INDOOR WET BULB TEMPERATURE |      |      |     |       |      |      |     |       |      |      |    |
|-------|---------|-----------------------------|------|------|-----|------|------|------|-----|------|------|------|-----|--------------------------------------|------|------|-----|-------|------|------|-----|-------|------|------|----|
|       |         | 65°F                        |      |      |     | 75°F |      |      |     | 85°F |      |      |     | 95°F                                 |      |      |     | 105°F |      |      |     | 115°F |      |      |    |
|       |         | 59                          | 63   | 67   | 71  | 59   | 63   | 67   | 71  | 59   | 63   | 67   | 71  | 59                                   | 63   | 67   | 71  | 59    | 63   | 67   | 71  | 59    | 63   | 67   | 71 |
| 70    | MBh     | 23.1                        | 23.9 | 26.2 | -   | 22.5 | 23.4 | 25.6 | -   | 22.0 | 22.8 | 25.0 | -   | 21.5                                 | 22.3 | 24.4 | -   | 20.4  | 21.1 | 23.2 | -   | 18.9  | 19.6 | 21.5 | -  |
|       | S/T     | 0.77                        | 0.64 | 0.45 | -   | 0.80 | 0.67 | 0.46 | -   | 0.82 | 0.68 | 0.47 | -   | 0.84                                 | 0.71 | 0.49 | -   | 0.88  | 0.73 | 0.51 | -   | 0.88  | 0.74 | 0.51 | -  |
|       | ΔT      | 18                          | 16   | 12   | -   | 18   | 16   | 12   | -   | 18   | 16   | 12   | -   | 18                                   | 16   | 12   | -   | 18    | 16   | 12   | -   | 17    | 15   | 11   | -  |
|       | kW      | 1.42                        | 1.45 | 1.50 | -   | 1.53 | 1.57 | 1.62 | -   | 1.63 | 1.67 | 1.72 | -   | 1.72                                 | 1.75 | 1.81 | -   | 1.79  | 1.83 | 1.89 | -   | 1.85  | 1.89 | 1.96 | -  |
|       | Amps    | 6.5                         | 6.6  | 6.8  | -   | 6.9  | 7.0  | 7.2  | -   | 7.4  | 7.6  | 7.8  | -   | 7.8                                  | 8.0  | 8.2  | -   | 8.3   | 8.4  | 8.7  | -   | 8.7   | 8.9  | 9.1  | -  |
| 904   | Hi PR   | 231                         | 249  | 263  | -   | 260  | 279  | 295  | -   | 295  | 318  | 336  | -   | 336                                  | 362  | 382  | -   | 378   | 407  | 430  | -   | 418   | 450  | 475  | -  |
|       | Lo PR   | 114                         | 121  | 132  | -   | 120  | 128  | 139  | -   | 125  | 133  | 145  | -   | 131                                  | 139  | 152  | -   | 137   | 146  | 159  | -   | 142   | 151  | 165  | -  |
|       | MBh     | 22.4                        | 23.2 | 25.4 | -   | 21.9 | 22.7 | 24.9 | -   | 21.4 | 22.1 | 24.3 | -   | 20.8                                 | 21.6 | 23.7 | -   | 19.8  | 20.5 | 22.5 | -   | 18.3  | 19.0 | 20.8 | -  |
|       | S/T     | 0.73                        | 0.61 | 0.42 | -   | 0.76 | 0.64 | 0.44 | -   | 0.78 | 0.65 | 0.45 | -   | 0.81                                 | 0.67 | 0.47 | -   | 0.84  | 0.70 | 0.48 | -   | 0.84  | 0.70 | 0.49 | -  |
|       | ΔT      | 19                          | 16   | 12   | -   | 19   | 16   | 12   | -   | 19   | 16   | 12   | -   | 19                                   | 17   | 13   | -   | 19    | 16   | 12   | -   | 18    | 15   | 12   | -  |
| 806   | kW      | 1.41                        | 1.44 | 1.49 | -   | 1.52 | 1.55 | 1.60 | -   | 1.62 | 1.65 | 1.71 | -   | 1.70                                 | 1.74 | 1.80 | -   | 1.77  | 1.81 | 1.87 | -   | 1.84  | 1.88 | 1.94 | -  |
|       | Amps    | 6.4                         | 6.6  | 6.7  | -   | 6.9  | 7.0  | 7.2  | -   | 7.4  | 7.5  | 7.7  | -   | 7.8                                  | 7.9  | 8.2  | -   | 8.2   | 8.4  | 8.6  | -   | 8.6   | 8.8  | 9.1  | -  |
|       | Hi PR   | 229                         | 247  | 260  | -   | 257  | 277  | 292  | -   | 292  | 315  | 332  | -   | 333                                  | 358  | 378  | -   | 375   | 403  | 426  | -   | 414   | 445  | 470  | -  |
|       | Lo PR   | 112                         | 120  | 131  | -   | 119  | 126  | 138  | -   | 124  | 131  | 143  | -   | 130                                  | 138  | 151  | -   | 136   | 145  | 158  | -   | 141   | 150  | 163  | -  |
|       | MBh     | 20.7                        | 21.4 | 23.5 | -   | 20.2 | 20.9 | 22.9 | -   | 19.7 | 20.4 | 22.4 | -   | 19.2                                 | 19.9 | 21.9 | -   | 18.3  | 18.9 | 20.8 | -   | 16.9  | 17.6 | 19.2 | -  |
| 707   | S/T     | 0.71                        | 0.59 | 0.41 | -   | 0.73 | 0.61 | 0.42 | -   | 0.75 | 0.63 | 0.44 | -   | 0.78                                 | 0.65 | 0.45 | -   | 0.81  | 0.67 | 0.47 | -   | 0.81  | 0.68 | 0.47 | -  |
|       | ΔT      | 19                          | 16   | 13   | -   | 19   | 17   | 13   | -   | 19   | 17   | 13   | -   | 19                                   | 17   | 13   | -   | 19    | 17   | 13   | -   | 18    | 15   | 12   | -  |
|       | kW      | 1.38                        | 1.41 | 1.45 | -   | 1.48 | 1.51 | 1.56 | -   | 1.58 | 1.61 | 1.66 | -   | 1.66                                 | 1.70 | 1.75 | -   | 1.73  | 1.77 | 1.83 | -   | 1.79  | 1.83 | 1.89 | -  |
|       | Amps    | 6.3                         | 6.4  | 6.6  | -   | 6.7  | 6.8  | 7.0  | -   | 7.2  | 7.3  | 7.5  | -   | 7.6                                  | 7.7  | 8.0  | -   | 8.0   | 8.2  | 8.4  | -   | 8.4   | 8.6  | 8.8  | -  |
|       | Hi PR   | 222                         | 239  | 253  | -   | 249  | 268  | 283  | -   | 284  | 305  | 322  | -   | 323                                  | 348  | 367  | -   | 363   | 391  | 413  | -   | 402   | 432  | 456  | -  |
| Lo PR | 109     | 116                         | 127  | -    | 115 | 123  | 134  | -    | 120 | 127  | 139  | -    | 126 | 134                                  | 146  | -    | 132 | 140   | 153  | -    | 136 | 145   | 158  | -    |    |

|       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 904   | MBh   | 23.5 | 24.2 | 26.2 | 28.1 | 22.9 | 23.6 | 25.6 | 27.4 | 22.4 | 23.0 | 24.9 | 26.8 | 21.8 | 22.5 | 24.3 | 26.1 | 20.7 | 21.4 | 23.1 | 24.8 | 19.2 | 19.8 | 21.4 | 23.0 |
|       | S/T   | 0.87 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.96 | 0.86 | 0.65 | 0.42 | 1.00 | 0.89 | 0.67 | 0.43 | 1.00 | 0.90 | 0.68 | 0.44 |
|       | ΔT    | 21   | 19   | 16   | 11   | 21   | 19   | 16   | 11   | 21   | 19   | 16   | 11   | 21   | 20   | 16   | 11   | 21   | 19   | 16   | 11   | 20   | 18   | 15   | 10   |
|       | kW    | 1.43 | 1.46 | 1.51 | 1.56 | 1.54 | 1.58 | 1.63 | 1.68 | 1.64 | 1.68 | 1.73 | 1.79 | 1.73 | 1.77 | 1.83 | 1.89 | 1.80 | 1.84 | 1.91 | 1.97 | 1.87 | 1.91 | 1.97 | 2.04 |
|       | Amps  | 6.5  | 6.7  | 6.8  | 7.0  | 7.0  | 7.1  | 7.3  | 7.5  | 7.5  | 7.6  | 7.8  | 8.1  | 7.9  | 8.1  | 8.3  | 8.6  | 8.3  | 8.5  | 8.7  | 9.0  | 8.8  | 8.9  | 9.2  | 9.5  |
| 806   | Hi PR | 234  | 252  | 266  | 277  | 262  | 282  | 298  | 311  | 298  | 321  | 339  | 354  | 340  | 366  | 386  | 403  | 382  | 411  | 434  | 453  | 422  | 454  | 480  | 501  |
|       | Lo PR | 115  | 122  | 133  | 142  | 121  | 129  | 141  | 150  | 126  | 134  | 146  | 156  | 132  | 141  | 154  | 164  | 139  | 148  | 161  | 172  | 143  | 153  | 167  | 177  |
|       | MBh   | 22.8 | 23.5 | 25.4 | 27.3 | 22.3 | 22.9 | 24.8 | 26.6 | 21.7 | 22.4 | 24.2 | 26.0 | 21.2 | 21.8 | 23.6 | 25.4 | 20.1 | 20.7 | 22.4 | 24.1 | 18.7 | 19.2 | 20.8 | 22.3 |
|       | S/T   | 0.83 | 0.75 | 0.56 | 0.36 | 0.86 | 0.77 | 0.59 | 0.38 | 0.89 | 0.79 | 0.60 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.96 | 0.86 | 0.65 | 0.42 |
|       | ΔT    | 22   | 20   | 16   | 11   | 22   | 20   | 17   | 11   | 22   | 20   | 17   | 11   | 22   | 20   | 17   | 12   | 22   | 20   | 16   | 11   | 20   | 19   | 15   | 11   |
| 707   | kW    | 1.42 | 1.45 | 1.50 | 1.55 | 1.53 | 1.57 | 1.62 | 1.67 | 1.63 | 1.67 | 1.72 | 1.78 | 1.72 | 1.75 | 1.81 | 1.87 | 1.79 | 1.83 | 1.89 | 1.95 | 1.85 | 1.89 | 1.96 | 2.02 |
|       | Amps  | 6.5  | 6.6  | 6.8  | 7.0  | 6.9  | 7.1  | 7.2  | 7.5  | 7.4  | 7.6  | 7.8  | 8.0  | 7.8  | 8.0  | 8.2  | 8.5  | 8.3  | 8.4  | 8.7  | 9.0  | 8.7  | 8.9  | 9.1  | 9.4  |
|       | Hi PR | 231  | 249  | 263  | 274  | 260  | 279  | 295  | 308  | 295  | 318  | 336  | 350  | 336  | 362  | 382  | 399  | 378  | 407  | 430  | 449  | 418  | 450  | 475  | 496  |
|       | Lo PR | 114  | 121  | 132  | 141  | 120  | 128  | 139  | 148  | 125  | 133  | 145  | 154  | 131  | 139  | 152  | 162  | 137  | 146  | 160  | 170  | 142  | 151  | 165  | 176  |
|       | MBh   | 21.0 | 21.7 | 23.4 | 25.2 | 20.5 | 21.2 | 22.9 | 24.6 | 20.1 | 20.7 | 22.4 | 24.0 | 19.6 | 20.1 | 21.8 | 23.4 | 18.6 | 19.1 | 20.7 | 22.2 | 17.2 | 17.7 | 19.2 | 20.6 |
| 75    | S/T   | 0.80 | 0.72 | 0.54 | 0.35 | 0.83 | 0.75 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.92 | 0.82 | 0.62 | 0.40 | 0.92 | 0.83 | 0.63 | 0.40 |
|       | ΔT    | 22   | 20   | 17   | 11   | 22   | 21   | 17   | 12   | 22   | 21   | 17   | 12   | 22   | 21   | 17   | 12   | 22   | 20   | 17   | 12   | 21   | 19   | 16   | 11   |
|       | kW    | 1.39 | 1.42 | 1.46 | 1.51 | 1.49 | 1.53 | 1.58 | 1.63 | 1.59 | 1.62 | 1.68 | 1.73 | 1.67 | 1.71 | 1.77 | 1.83 | 1.74 | 1.78 | 1.84 | 1.90 | 1.80 | 1.85 | 1.91 | 1.97 |
|       | Amps  | 6.3  | 6.5  | 6.6  | 6.8  | 6.8  | 6.9  | 7.1  | 7.3  | 7.2  | 7.4  | 7.6  | 7.8  | 7.7  | 7.8  | 8.0  | 8.3  | 8.1  | 8.2  | 8.5  | 8.7  | 8.5  | 8.7  | 8.9  | 9.2  |
|       | Hi PR | 225  | 242  | 255  | 266  | 252  | 271  | 286  | 299  | 287  | 308  | 326  | 340  | 326  | 351  | 371  | 387  | 367  | 395  | 417  | 435  | 406  | 436  | 461  | 481  |
| Lo PR | 110   | 117  | 128  | 136  | 116  | 124  | 135  | 144  | 121  | 129  | 141  | 150  | 127  | 135  | 148  | 157  | 133  | 142  | 155  | 165  | 138  | 147  | 160  | 170  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB        | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |            |             |      |       |      |      |      |       |      |      |      |
|------------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------------|-------------|------|-------|------|------|------|-------|------|------|------|
|            |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |            |             |      | 105°F |      |      |      | 115°F |      |      |      |
|            |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63         | 67          | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |
| <b>80</b>  | MBh     | 23.9                        | 24.4 | 26.1 | 27.9 | 23.3 | 23.8 | 25.5 | 27.2 | 22.8 | 23.3 | 24.9 | 26.6 | 22.2                                 | 22.7       | 24.3        | 25.9 | 21.1  | 21.6 | 23.0 | 24.6 | 19.6  | 20.0 | 21.4 | 22.8 |
|            | S/T     | 0.96                        | 0.90 | 0.73 | 0.55 | 1.00 | 0.93 | 0.76 | 0.57 | 1.00 | 0.96 | 0.78 | 0.58 | 1.00                                 | 1.00       | 0.80        | 0.60 | 1.00  | 1.00 | 0.83 | 0.62 | 1.00  | 1.00 | 0.84 | 0.63 |
|            | ΔT      | 23                          | 22   | 19   | 16   | 24   | 23   | 20   | 16   | 23   | 23   | 20   | 16   | 23                                   | 23         | 20          | 16   | 21    | 22   | 20   | 16   | 20    | 20   | 18   | 15   |
|            | kW      | 1.45                        | 1.48 | 1.52 | 1.57 | 1.56 | 1.59 | 1.64 | 1.70 | 1.66 | 1.69 | 1.75 | 1.81 | 1.74                                 | 1.78       | 1.84        | 1.91 | 1.82  | 1.86 | 1.92 | 1.99 | 1.88  | 1.93 | 1.99 | 2.06 |
|            | Amps    | 6.6                         | 6.7  | 6.9  | 7.1  | 7.0  | 7.2  | 7.4  | 7.6  | 7.5  | 7.7  | 7.9  | 8.1  | 8.0                                  | 8.1        | 8.4         | 8.6  | 8.4   | 8.6  | 8.8  | 9.1  | 8.8   | 9.0  | 9.3  | 9.6  |
|            | Hi PR   | 236                         | 254  | 268  | 280  | 265  | 285  | 301  | 314  | 301  | 324  | 342  | 357  | 343                                  | 369        | 390         | 407  | 386   | 416  | 439  | 458  | 427   | 459  | 485  | 506  |
| Lo PR      | 116     | 123                         | 135  | 143  | 122  | 130  | 142  | 151  | 127  | 135  | 148  | 157  | 134  | 142                                  | 155        | 165         | 140  | 149   | 163  | 173  | 145  | 154   | 168  | 179  |      |
| <b>80</b>  | MBh     | 23.2                        | 23.7 | 25.3 | 27.1 | 22.7 | 23.2 | 24.7 | 26.4 | 22.1 | 22.6 | 24.1 | 25.8 | 21.6                                 | 22.0       | <b>23.6</b> | 25.2 | 20.5  | 20.9 | 22.4 | 23.9 | 19.0  | 19.4 | 20.7 | 22.2 |
|            | S/T     | 0.92                        | 0.86 | 0.70 | 0.52 | 0.95 | 0.89 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00                                 | 0.94       | <b>0.77</b> | 0.57 | 1.00  | 0.98 | 0.80 | 0.59 | 1.00  | 0.99 | 0.80 | 0.60 |
|            | ΔT      | 24                          | 23   | 20   | 16   | 25   | 24   | 20   | 16   | 25   | 24   | 20   | 16   | 25                                   | 24         | <b>21</b>   | 16   | 23    | 23   | 20   | 16   | 22    | 22   | 19   | 15   |
|            | kW      | 1.43                        | 1.46 | 1.51 | 1.56 | 1.54 | 1.58 | 1.63 | 1.68 | 1.64 | 1.68 | 1.73 | 1.79 | 1.73                                 | 1.77       | <b>1.83</b> | 1.89 | 1.80  | 1.84 | 1.91 | 1.97 | 1.87  | 1.91 | 1.97 | 2.04 |
|            | Amps    | 6.5                         | 6.7  | 6.8  | 7.0  | 7.0  | 7.1  | 7.3  | 7.5  | 7.5  | 7.6  | 7.8  | 8.1  | 7.9                                  | 8.1        | <b>8.3</b>  | 8.6  | 8.3   | 8.5  | 8.7  | 9.0  | 8.8   | 8.9  | 9.2  | 9.5  |
|            | Hi PR   | 234                         | 252  | 266  | 277  | 262  | 282  | 298  | 311  | 298  | 321  | 339  | 354  | 340                                  | 366        | <b>386</b>  | 403  | 382   | 411  | 434  | 453  | 422   | 455  | 480  | 501  |
| Lo PR      | 115     | 122                         | 133  | 142  | 121  | 129  | 141  | 150  | 126  | 134  | 146  | 156  | 132  | 141                                  | <b>154</b> | 164         | 139  | 148   | 161  | 172  | 143  | 153   | 167  | 177  |      |
| <b>707</b> | MBh     | 21.4                        | 21.9 | 23.4 | 25.0 | 20.9 | 21.4 | 22.8 | 24.4 | 20.4 | 20.9 | 22.3 | 23.8 | 19.9                                 | 20.4       | 21.7        | 23.2 | 18.9  | 19.3 | 20.7 | 22.1 | 17.5  | 17.9 | 19.1 | 20.5 |
|            | S/T     | 0.88                        | 0.83 | 0.67 | 0.50 | 0.91 | 0.86 | 0.70 | 0.52 | 0.94 | 0.88 | 0.72 | 0.53 | 0.97                                 | 0.91       | 0.74        | 0.55 | 1.00  | 0.94 | 0.77 | 0.57 | 1.01  | 0.95 | 0.77 | 0.58 |
|            | ΔT      | 25                          | 24   | 20   | 16   | 25   | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25                                   | 24         | 21          | 17   | 25    | 24   | 21   | 16   | 23    | 22   | 19   | 15   |
|            | kW      | 1.40                        | 1.43 | 1.47 | 1.52 | 1.51 | 1.54 | 1.59 | 1.64 | 1.60 | 1.64 | 1.69 | 1.75 | 1.69                                 | 1.72       | 1.78        | 1.84 | 1.76  | 1.80 | 1.86 | 1.92 | 1.82  | 1.86 | 1.92 | 1.99 |
|            | Amps    | 6.4                         | 6.5  | 6.7  | 6.9  | 6.8  | 6.9  | 7.1  | 7.4  | 7.3  | 7.4  | 7.6  | 7.9  | 7.7                                  | 7.9        | 8.1         | 8.4  | 8.1   | 8.3  | 8.5  | 8.8  | 8.5   | 8.7  | 9.0  | 9.3  |
|            | Hi PR   | 227                         | 244  | 258  | 269  | 254  | 274  | 289  | 302  | 289  | 311  | 329  | 343  | 330                                  | 355        | 375         | 391  | 371   | 399  | 421  | 440  | 410   | 441  | 466  | 486  |
| Lo PR      | 111     | 118                         | 129  | 138  | 118  | 125  | 137  | 145  | 122  | 130  | 142  | 151  | 128  | 137                                  | 149        | 159         | 135  | 143   | 156  | 166  | 139  | 148   | 162  | 172  |      |

|            |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>904</b> | MBh   | 24.3 | 24.8 | 26.0 | 27.7 | 23.7 | 24.2 | 25.3 | 27.0 | 23.2 | 23.6 | 24.7 | 26.4 | 22.6 | 23.1 | 24.1 | 25.8 | 21.5 | 21.9 | 22.9 | 24.5 | 19.9 | 20.3 | 21.2 | 22.7 |
|            | S/T   | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.96 | 0.78 |
|            | ΔT    | 25   | 24   | 23   | 20   | 24   | 25   | 23   | 20   | 24   | 24   | 23   | 20   | 23   | 23   | 24   | 20   | 22   | 22   | 23   | 20   | 20   | 21   | 22   | 19   |
|            | kW    | 1.46 | 1.49 | 1.54 | 1.59 | 1.57 | 1.60 | 1.66 | 1.71 | 1.67 | 1.71 | 1.76 | 1.82 | 1.76 | 1.80 | 1.86 | 1.92 | 1.83 | 1.88 | 1.94 | 2.01 | 1.90 | 1.94 | 2.01 | 2.08 |
|            | Amps  | 6.6  | 6.8  | 6.9  | 7.2  | 7.1  | 7.2  | 7.4  | 7.6  | 7.6  | 7.7  | 8.0  | 8.2  | 8.0  | 8.2  | 8.4  | 8.7  | 8.5  | 8.6  | 8.9  | 9.2  | 8.9  | 9.1  | 9.4  | 9.7  |
|            | Hi PR | 238  | 257  | 271  | 283  | 268  | 288  | 304  | 317  | 304  | 328  | 346  | 361  | 347  | 373  | 394  | 411  | 390  | 420  | 443  | 462  | 431  | 464  | 490  | 511  |
| Lo PR      | 117   | 125  | 136  | 145  | 124  | 132  | 144  | 153  | 129  | 137  | 149  | 159  | 135  | 144  | 157  | 167  | 142  | 151  | 164  | 175  | 146  | 156  | 170  | 181  |      |
| <b>806</b> | MBh   | 23.6 | 24.1 | 25.2 | 26.9 | 23.1 | 23.5 | 24.6 | 26.3 | 22.5 | 22.9 | 24.0 | 25.6 | 22.0 | 22.4 | 23.4 | 25.0 | 20.9 | 21.3 | 22.3 | 23.8 | 19.3 | 19.7 | 20.6 | 22.0 |
|            | S/T   | 0.96 | 0.93 | 0.84 | 0.68 | 0.99 | 0.96 | 0.87 | 0.70 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.96 | 0.78 |
|            | ΔT    | 26   | 25   | 24   | 21   | 26   | 26   | 24   | 21   | 26   | 26   | 24   | 21   | 25   | 26   | 25   | 21   | 24   | 24   | 24   | 21   | 22   | 22   | 23   | 20   |
|            | kW    | 1.45 | 1.48 | 1.52 | 1.57 | 1.56 | 1.59 | 1.64 | 1.70 | 1.66 | 1.69 | 1.75 | 1.81 | 1.74 | 1.78 | 1.84 | 1.91 | 1.82 | 1.86 | 1.92 | 1.99 | 1.88 | 1.93 | 1.99 | 2.06 |
|            | Amps  | 6.6  | 6.7  | 6.9  | 7.1  | 7.0  | 7.2  | 7.4  | 7.6  | 7.5  | 7.7  | 7.9  | 8.1  | 8.0  | 8.1  | 8.4  | 8.6  | 8.4  | 8.6  | 8.8  | 9.1  | 8.8  | 9.0  | 9.3  | 9.6  |
|            | Hi PR | 236  | 254  | 268  | 280  | 265  | 285  | 301  | 314  | 301  | 324  | 342  | 357  | 343  | 369  | 390  | 407  | 386  | 416  | 439  | 458  | 427  | 459  | 485  | 506  |
| Lo PR      | 116   | 123  | 135  | 143  | 122  | 130  | 142  | 151  | 127  | 135  | 148  | 157  | 134  | 142  | 155  | 165  | 140  | 149  | 163  | 173  | 145  | 154  | 168  | 179  |      |
| <b>707</b> | MBh   | 21.8 | 22.2 | 23.3 | 24.8 | 21.3 | 21.7 | 22.7 | 24.2 | 20.8 | 21.2 | 22.2 | 23.7 | 20.3 | 20.7 | 21.6 | 23.1 | 19.3 | 19.6 | 20.6 | 21.9 | 17.8 | 18.2 | 19.0 | 20.3 |
|            | S/T   | 0.93 | 0.89 | 0.81 | 0.65 | 0.96 | 0.93 | 0.83 | 0.68 | 0.98 | 0.95 | 0.86 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.92 | 0.75 |
|            | ΔT    | 26   | 26   | 24   | 21   | 27   | 26   | 25   | 21   | 27   | 26   | 25   | 21   | 26   | 26   | 25   | 22   | 25   | 26   | 25   | 21   | 23   | 24   | 23   | 20   |
|            | kW    | 1.41 | 1.44 | 1.49 | 1.53 | 1.52 | 1.55 | 1.60 | 1.66 | 1.62 | 1.65 | 1.71 | 1.76 | 1.70 | 1.74 | 1.80 | 1.86 | 1.77 | 1.81 | 1.87 | 1.94 | 1.84 | 1.88 | 1.94 | 2.01 |
|            | Amps  | 6.4  | 6.6  | 6.7  | 6.9  | 6.9  | 7.0  | 7.2  | 7.4  | 7.3  | 7.5  | 7.7  | 8.0  | 7.8  | 7.9  | 8.2  | 8.4  | 8.2  | 8.4  | 8.6  | 8.9  | 8.6  | 8.8  | 9.1  | 9.4  |
|            | Hi PR | 229  | 246  | 260  | 271  | 257  | 277  | 292  | 305  | 292  | 315  | 332  | 346  | 333  | 358  | 378  | 395  | 375  | 403  | 426  | 444  | 414  | 445  | 470  | 490  |
| Lo PR      | 112   | 120  | 131  | 139  | 119  | 126  | 138  | 147  | 123  | 131  | 143  | 153  | 130  | 138  | 151  | 160  | 136  | 145  | 158  | 168  | 141  | 150  | 163  | 174  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |    |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
|       |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |    |
|       |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| 70    | MBh     | 28.5                        | 29.6 | 32.4 | -    | 27.9 | 28.9 | 31.6 | -    | 27.2 | 28.2 | 30.9 | -    | 26.5                                 | 27.5 | 30.1 | -    | 25.2  | 26.1 | 28.6 | -    | 23.3  | 24.2 | 26.5 | -  |
|       | S/T     | 0.77                        | 0.64 | 0.44 | -    | 0.80 | 0.66 | 0.46 | -    | 0.82 | 0.68 | 0.47 | -    | 0.84                                 | 0.70 | 0.49 | -    | 0.87  | 0.73 | 0.51 | -    | 0.88  | 0.74 | 0.51 | -  |
|       | ΔT      | 18                          | 16   | 12   | -    | 18   | 16   | 12   | -    | 18   | 16   | 12   | -    | 18                                   | 16   | 12   | -    | 18    | 16   | 12   | -    | 17    | 15   | 11   | -  |
|       | kW      | 1.93                        | 1.97 | 2.03 | -    | 2.08 | 2.12 | 2.19 | -    | 2.21 | 2.26 | 2.34 | -    | 2.33                                 | 2.38 | 2.46 | -    | 2.43  | 2.49 | 2.57 | -    | 2.52  | 2.57 | 2.66 | -  |
|       | Amps    | 8.8                         | 9.0  | 9.2  | -    | 9.4  | 9.6  | 9.9  | -    | 10.1 | 10.3 | 10.6 | -    | 10.7                                 | 10.9 | 11.2 | -    | 11.2  | 11.5 | 11.8 | -    | 11.8  | 12.0 | 12.4 | -  |
|       | Hi PR   | 247                         | 266  | 281  | -    | 277  | 298  | 315  | -    | 315  | 339  | 358  | -    | 359                                  | 386  | 408  | -    | 404   | 435  | 459  | -    | 446   | 480  | 507  | -  |
|       | Lo PR   | 111                         | 118  | 129  | -    | 117  | 124  | 136  | -    | 122  | 129  | 141  | -    | 128                                  | 136  | 148  | -    | 134   | 142  | 155  | -    | 138   | 147  | 161  | -  |
|       | MBh     | 27.7                        | 28.7 | 31.4 | -    | 27.0 | 28.0 | 30.7 | -    | 26.4 | 27.4 | 30.0 | -    | 25.8                                 | 26.7 | 29.3 | -    | 24.5  | 25.4 | 27.8 | -    | 22.7  | 23.5 | 25.7 | -  |
|       | S/T     | 0.73                        | 0.61 | 0.42 | -    | 0.76 | 0.63 | 0.44 | -    | 0.78 | 0.65 | 0.45 | -    | 0.80                                 | 0.67 | 0.46 | -    | 0.83  | 0.70 | 0.48 | -    | 0.84  | 0.70 | 0.49 | -  |
|       | ΔT      | 19                          | 16   | 12   | -    | 19   | 16   | 12   | -    | 19   | 16   | 12   | -    | 19                                   | 17   | 13   | -    | 19    | 16   | 12   | -    | 18    | 15   | 12   | -  |
| kW    | 1.91    | 1.95                        | 2.02 | -    | 2.06 | 2.11 | 2.18 | -    | 2.19 | 2.24 | 2.32 | -    | 2.31 | 2.36                                 | 2.44 | -    | 2.41 | 2.46  | 2.55 | -    | 2.50 | 2.55  | 2.64 | -    |    |
| Amps  | 8.8     | 8.9                         | 9.2  | -    | 9.3  | 9.5  | 9.8  | -    | 10.0 | 10.2 | 10.5 | -    | 10.6 | 10.8                                 | 11.1 | -    | 11.1 | 11.4  | 11.7 | -    | 11.7 | 12.0  | 12.3 | -    |    |
| Hi PR | 245     | 263                         | 278  | -    | 274  | 295  | 312  | -    | 312  | 336  | 355  | -    | 355  | 382                                  | 404  | -    | 400  | 430   | 454  | -    | 442  | 475   | 502  | -    |    |
| Lo PR | 110     | 117                         | 127  | -    | 116  | 123  | 135  | -    | 120  | 128  | 140  | -    | 126  | 135                                  | 147  | -    | 133  | 141   | 154  | -    | 137  | 146   | 159  | -    |    |
| MBh   | 25.6    | 26.5                        | 29.0 | -    | 25.0 | 25.9 | 28.4 | -    | 24.4 | 25.3 | 27.7 | -    | 23.8 | 24.6                                 | 27.0 | -    | 22.6 | 23.4  | 25.7 | -    | 20.9 | 21.7  | 23.8 | -    |    |
| S/T   | 0.71    | 0.59                        | 0.41 | -    | 0.73 | 0.61 | 0.42 | -    | 0.75 | 0.63 | 0.43 | -    | 0.77 | 0.65                                 | 0.45 | -    | 0.80 | 0.67  | 0.47 | -    | 0.81 | 0.68  | 0.47 | -    |    |
| ΔT    | 19      | 16                          | 12   | -    | 19   | 17   | 13   | -    | 19   | 17   | 13   | -    | 19   | 17                                   | 13   | -    | 19   | 17    | 13   | -    | 18   | 15    | 12   | -    |    |
| kW    | 1.87    | 1.91                        | 1.97 | -    | 2.01 | 2.06 | 2.12 | -    | 2.14 | 2.19 | 2.26 | -    | 2.25 | 2.30                                 | 2.38 | -    | 2.35 | 2.40  | 2.48 | -    | 2.43 | 2.49  | 2.57 | -    |    |
| Amps  | 8.6     | 8.7                         | 9.0  | -    | 9.1  | 9.3  | 9.6  | -    | 9.8  | 10.0 | 10.2 | -    | 10.3 | 10.5                                 | 10.8 | -    | 10.9 | 11.1  | 11.4 | -    | 11.4 | 11.7  | 12.0 | -    |    |
| Hi PR | 237     | 255                         | 270  | -    | 266  | 286  | 302  | -    | 303  | 326  | 344  | -    | 345  | 371                                  | 392  | -    | 388  | 417   | 441  | -    | 429  | 461   | 487  | -    |    |
| Lo PR | 106     | 113                         | 124  | -    | 112  | 120  | 131  | -    | 117  | 124  | 136  | -    | 123  | 131                                  | 142  | -    | 129  | 137   | 149  | -    | 133  | 141   | 154  | -    |    |

|       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75    | MBh   | 29.0 | 29.9 | 32.3 | 34.7 | 28.3 | 29.2 | 31.6 | 33.9 | 27.7 | 28.5 | 30.8 | 33.1 | 27.0 | 27.8 | 30.1 | 32.3 | 25.6 | 26.4 | 28.6 | 30.7 | 23.7 | 24.4 | 26.5 | 28.4 |
|       | S/T   | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.96 | 0.86 | 0.65 | 0.42 | 0.99 | 0.89 | 0.67 | 0.43 | 1.00 | 0.90 | 0.68 | 0.44 |
|       | ΔT    | 21   | 19   | 16   | 11   | 21   | 19   | 16   | 11   | 21   | 19   | 16   | 11   | 21   | 20   | 17   | 11   | 21   | 19   | 16   | 11   | 20   | 18   | 15   | 10   |
|       | kW    | 1.94 | 1.99 | 2.05 | 2.12 | 2.10 | 2.14 | 2.21 | 2.29 | 2.23 | 2.28 | 2.36 | 2.44 | 2.35 | 2.40 | 2.48 | 2.57 | 2.45 | 2.51 | 2.59 | 2.68 | 2.54 | 2.60 | 2.68 | 2.78 |
|       | Amps  | 8.9  | 9.1  | 9.3  | 9.6  | 9.5  | 9.7  | 9.9  | 10.2 | 10.2 | 10.4 | 10.6 | 11.0 | 10.7 | 11.0 | 11.3 | 11.6 | 11.3 | 11.6 | 11.9 | 12.3 | 11.9 | 12.1 | 12.5 | 12.9 |
|       | Hi PR | 250  | 269  | 284  | 296  | 280  | 301  | 318  | 332  | 318  | 343  | 362  | 377  | 363  | 390  | 412  | 430  | 408  | 439  | 464  | 484  | 451  | 485  | 512  | 534  |
|       | Lo PR | 112  | 119  | 130  | 138  | 118  | 126  | 137  | 146  | 123  | 131  | 143  | 152  | 129  | 137  | 150  | 160  | 135  | 144  | 157  | 167  | 140  | 149  | 162  | 173  |
|       | MBh   | 28.2 | 29.0 | 31.4 | 33.7 | 27.5 | 28.3 | 30.7 | 32.9 | 26.9 | 27.6 | 29.9 | 32.1 | 26.2 | 27.0 | 29.2 | 31.3 | 24.9 | 25.6 | 27.7 | 29.8 | 23.1 | 23.7 | 25.7 | 27.6 |
|       | S/T   | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.38 | 0.88 | 0.79 | 0.60 | 0.39 | 0.91 | 0.82 | 0.62 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.96 | 0.85 | 0.65 | 0.42 |
|       | ΔT    | 22   | 20   | 16   | 11   | 22   | 20   | 17   | 11   | 22   | 20   | 17   | 11   | 22   | 20   | 17   | 11   | 22   | 20   | 16   | 11   | 20   | 19   | 15   | 11   |
| kW    | 1.93  | 1.97 | 2.03 | 2.10 | 2.08 | 2.13 | 2.19 | 2.27 | 2.21 | 2.26 | 2.34 | 2.42 | 2.33 | 2.38 | 2.46 | 2.55 | 2.43 | 2.49 | 2.57 | 2.66 | 2.52 | 2.57 | 2.66 | 2.75 |      |
| Amps  | 8.8   | 9.0  | 9.2  | 9.5  | 9.4  | 9.6  | 9.9  | 10.2 | 10.1 | 10.3 | 10.6 | 10.9 | 10.7 | 10.9 | 11.2 | 11.5 | 11.2 | 11.5 | 11.8 | 12.2 | 11.8 | 12.1 | 12.4 | 12.8 |      |
| Hi PR | 247   | 266  | 281  | 293  | 277  | 298  | 315  | 329  | 315  | 339  | 358  | 374  | 359  | 386  | 408  | 426  | 404  | 435  | 459  | 479  | 446  | 480  | 507  | 529  |      |
| Lo PR | 111   | 118  | 129  | 137  | 117  | 125  | 136  | 145  | 122  | 129  | 141  | 150  | 128  | 136  | 148  | 158  | 134  | 142  | 156  | 166  | 139  | 147  | 161  | 171  |      |
| MBh   | 26.0  | 26.8 | 29.0 | 31.1 | 25.4 | 26.1 | 28.3 | 30.4 | 24.8 | 25.5 | 27.6 | 29.6 | 24.2 | 24.9 | 26.9 | 28.9 | 23.0 | 23.7 | 25.6 | 27.5 | 21.3 | 21.9 | 23.7 | 25.5 |      |
| S/T   | 0.80  | 0.72 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.82 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 |      |
| ΔT    | 22    | 20   | 17   | 11   | 22   | 20   | 17   | 12   | 22   | 20   | 17   | 12   | 22   | 21   | 17   | 12   | 22   | 20   | 17   | 12   | 21   | 19   | 16   | 11   |      |
| kW    | 1.88  | 1.92 | 1.98 | 2.05 | 2.03 | 2.07 | 2.14 | 2.21 | 2.16 | 2.21 | 2.28 | 2.35 | 2.27 | 2.32 | 2.40 | 2.48 | 2.37 | 2.42 | 2.50 | 2.59 | 2.45 | 2.51 | 2.59 | 2.68 |      |
| Amps  | 8.6   | 8.8  | 9.0  | 9.3  | 9.2  | 9.4  | 9.6  | 9.9  | 9.8  | 10.0 | 10.3 | 10.6 | 10.4 | 10.6 | 10.9 | 11.3 | 11.0 | 11.2 | 11.5 | 11.9 | 11.5 | 11.8 | 12.1 | 12.5 |      |
| Hi PR | 240   | 258  | 272  | 284  | 269  | 289  | 306  | 319  | 306  | 329  | 348  | 362  | 348  | 375  | 396  | 413  | 392  | 422  | 445  | 464  | 433  | 466  | 492  | 513  |      |
| Lo PR | 107   | 114  | 125  | 133  | 114  | 121  | 132  | 140  | 118  | 126  | 137  | 146  | 124  | 132  | 144  | 153  | 130  | 138  | 151  | 161  | 134  | 143  | 156  | 166  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB       | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |
|-----------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|
|           |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |
|           |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |
| <b>80</b> | MBh     | 29.5                        | 30.2 | 32.2 | 34.5 | 28.8 | 29.5 | 31.5 | 33.7 | 28.1 | 28.8 | 30.7 | 32.9 | 27.5 | 28.1 | 30.0 | 32.0 | 26.1  | 26.7 | 28.5 | 30.4 | 24.2  | 24.7 | 26.4 | 28.2 |
|           | S/T     | 0.96                        | 0.90 | 0.73 | 0.55 | 1.00 | 0.93 | 0.76 | 0.57 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00  | 1.00 | 0.83 | 0.62 | 1.00  | 1.00 | 0.84 | 0.63 |
|           | ΔT      | 23                          | 22   | 19   | 15   | 24   | 23   | 20   | 16   | 23   | 23   | 20   | 16   | 23   | 23   | 20   | 16   | 21    | 22   | 19   | 16   | 20    | 20   | 18   | 15   |
|           | kW      | 1.96                        | 2.00 | 2.07 | 2.13 | 2.11 | 2.16 | 2.23 | 2.31 | 2.25 | 2.30 | 2.38 | 2.46 | 2.37 | 2.42 | 2.51 | 2.59 | 2.47  | 2.53 | 2.61 | 2.70 | 2.56  | 2.62 | 2.71 | 2.80 |
|           | Amps    | 9.0                         | 9.1  | 9.4  | 9.7  | 9.6  | 9.7  | 10.0 | 10.3 | 10.2 | 10.4 | 10.7 | 11.1 | 10.8 | 11.0 | 11.4 | 11.7 | 11.4  | 11.7 | 12.0 | 12.4 | 12.0  | 12.2 | 12.6 | 13.0 |
|           | Hi PR   | 252                         | 271  | 286  | 299  | 283  | 304  | 321  | 335  | 322  | 346  | 365  | 381  | 366  | 394  | 416  | 434  | 412   | 443  | 468  | 488  | 455   | 490  | 517  | 540  |
|           | Lo PR   | 113                         | 120  | 131  | 140  | 119  | 127  | 139  | 148  | 124  | 132  | 144  | 154  | 130  | 139  | 151  | 161  | 137   | 145  | 159  | 169  | 141   | 150  | 164  | 175  |
|           | MBh     | 28.7                        | 29.3 | 31.3 | 33.4 | 28.0 | 28.6 | 30.6 | 32.7 | 27.3 | 27.9 | 29.8 | 31.9 | 26.7 | 27.2 | 29.1 | 31.1 | 25.3  | 25.9 | 27.7 | 29.6 | 23.5  | 24.0 | 25.6 | 27.4 |
|           | S/T     | 0.91                        | 0.86 | 0.70 | 0.52 | 0.95 | 0.89 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00  | 0.97 | 0.79 | 0.59 | 1.00  | 0.98 | 0.80 | 0.60 |
|           | ΔT      | 24                          | 23   | 20   | 16   | 24   | 23   | 20   | 16   | 24   | 23   | 20   | 16   | 25   | 24   | 21   | 17   | 25    | 23   | 20   | 16   | 22    | 22   | 19   | 15   |
| kW        | 1.94    | 1.99                        | 2.05 | 2.12 | 2.10 | 2.14 | 2.21 | 2.29 | 2.23 | 2.28 | 2.36 | 2.44 | 2.35 | 2.40 | 2.48 | 2.57 | 2.45 | 2.51  | 2.59 | 2.68 | 2.54 | 2.60  | 2.69 | 2.78 |      |
| Amps      | 8.9     | 9.1                         | 9.3  | 9.6  | 9.5  | 9.7  | 9.9  | 10.2 | 10.2 | 10.4 | 10.6 | 11.0 | 10.7 | 11.0 | 11.3 | 11.6 | 11.3 | 11.6  | 11.9 | 12.3 | 11.9 | 12.1  | 12.5 | 12.9 |      |
| Hi PR     | 250     | 269                         | 284  | 296  | 280  | 301  | 318  | 332  | 318  | 343  | 362  | 377  | 363  | 390  | 412  | 430  | 408  | 439   | 464  | 484  | 451  | 485   | 512  | 534  |      |
| Lo PR     | 112     | 119                         | 130  | 138  | 118  | 126  | 137  | 146  | 123  | 131  | 143  | 152  | 129  | 137  | 150  | 160  | 135  | 144   | 157  | 167  | 140  | 149   | 162  | 173  |      |
| MBh       | 26.5    | 27.0                        | 28.9 | 30.9 | 25.8 | 26.4 | 28.2 | 30.2 | 25.2 | 25.8 | 27.5 | 29.4 | 24.6 | 25.1 | 26.9 | 28.7 | 23.4 | 23.9  | 25.5 | 27.3 | 21.7 | 22.1  | 23.6 | 25.3 |      |
| S/T       | 0.88    | 0.83                        | 0.67 | 0.50 | 0.91 | 0.86 | 0.70 | 0.52 | 0.94 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94  | 0.77 | 0.57 | 1.01 | 0.95  | 0.77 | 0.58 |      |
| ΔT        | 24      | 23                          | 20   | 16   | 25   | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25   | 24    | 21   | 16   | 23   | 22    | 19   | 15   |      |
| kW        | 1.90    | 1.94                        | 2.00 | 2.06 | 2.04 | 2.09 | 2.16 | 2.23 | 2.18 | 2.22 | 2.30 | 2.37 | 2.29 | 2.34 | 2.42 | 2.50 | 2.39 | 2.44  | 2.53 | 2.61 | 2.47 | 2.53  | 2.62 | 2.71 |      |
| Amps      | 8.7     | 8.9                         | 9.1  | 9.4  | 9.3  | 9.5  | 9.7  | 10.0 | 9.9  | 10.1 | 10.4 | 10.7 | 10.5 | 10.7 | 11.0 | 11.4 | 11.1 | 11.3  | 11.6 | 12.0 | 11.6 | 11.9  | 12.2 | 12.6 |      |
| Hi PR     | 242     | 260                         | 275  | 287  | 272  | 292  | 309  | 322  | 309  | 332  | 351  | 366  | 352  | 379  | 400  | 417  | 396  | 426   | 450  | 469  | 437  | 471   | 497  | 518  |      |
| Lo PR     | 109     | 115                         | 126  | 134  | 115  | 122  | 133  | 142  | 119  | 127  | 138  | 147  | 125  | 133  | 145  | 155  | 131  | 140   | 152  | 162  | 136  | 144   | 158  | 168  |      |

|           |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>85</b> | MBh   | 30.0 | 30.6 | 32.1 | 34.2 | 29.3 | 29.9 | 31.3 | 33.4 | 28.6 | 29.2 | 30.6 | 32.6 | 27.9 | 28.5 | 29.8 | 31.8 | 26.5 | 27.1 | 28.3 | 30.2 | 24.6 | 25.1 | 26.3 | 28.0 |
|           | S/T   | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 1.00 | 0.91 | 0.73 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.99 | 0.81 | 1.00 | 1.00 | 1.00 | 0.81 |
|           | ΔT    | 25   | 24   | 23   | 20   | 24   | 25   | 23   | 20   | 24   | 24   | 23   | 20   | 23   | 23   | 23   | 20   | 22   | 22   | 22   | 20   | 20   | 21   | 22   | 19   |
|           | kW    | 1.98 | 2.02 | 2.08 | 2.15 | 2.13 | 2.18 | 2.25 | 2.33 | 2.27 | 2.32 | 2.40 | 2.48 | 2.39 | 2.44 | 2.53 | 2.61 | 2.49 | 2.55 | 2.64 | 2.73 | 2.58 | 2.64 | 2.73 | 2.83 |
|           | Amps  | 9.0  | 9.2  | 9.4  | 9.7  | 9.6  | 9.8  | 10.1 | 10.4 | 10.3 | 10.5 | 10.8 | 11.2 | 10.9 | 11.1 | 11.4 | 11.8 | 11.5 | 11.7 | 12.1 | 12.5 | 12.1 | 12.3 | 12.7 | 13.1 |
|           | Hi PR | 255  | 274  | 289  | 302  | 286  | 307  | 325  | 339  | 325  | 350  | 369  | 385  | 370  | 398  | 420  | 439  | 416  | 448  | 473  | 493  | 460  | 495  | 523  | 545  |
|           | Lo PR | 114  | 121  | 133  | 141  | 121  | 128  | 140  | 149  | 125  | 133  | 146  | 155  | 132  | 140  | 153  | 163  | 138  | 147  | 160  | 171  | 143  | 152  | 166  | 177  |
|           | MBh   | 29.2 | 29.7 | 31.1 | 33.2 | 28.5 | 29.0 | 30.4 | 32.4 | 27.8 | 28.3 | 29.7 | 31.7 | 27.1 | 27.7 | 29.0 | 30.9 | 25.8 | 26.3 | 27.5 | 29.4 | 23.9 | 24.3 | 25.5 | 27.2 |
|           | S/T   | 0.96 | 0.92 | 0.83 | 0.68 | 0.99 | 0.96 | 0.86 | 0.70 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.96 | 0.78 |
|           | ΔT    | 26   | 25   | 24   | 21   | 26   | 26   | 24   | 21   | 26   | 26   | 24   | 21   | 25   | 26   | 24   | 21   | 24   | 24   | 24   | 21   | 22   | 22   | 22   | 19   |
| kW        | 1.96  | 2.00 | 2.07 | 2.13 | 2.11 | 2.16 | 2.23 | 2.31 | 2.25 | 2.30 | 2.38 | 2.46 | 2.37 | 2.42 | 2.51 | 2.59 | 2.47 | 2.53 | 2.61 | 2.70 | 2.56 | 2.62 | 2.71 | 2.80 |      |
| Amps      | 9.0   | 9.1  | 9.4  | 9.7  | 9.6  | 9.7  | 10.0 | 10.3 | 10.2 | 10.4 | 10.7 | 11.1 | 10.8 | 11.0 | 11.4 | 11.7 | 11.4 | 11.7 | 12.0 | 12.4 | 12.0 | 12.2 | 12.6 | 13.0 |      |
| Hi PR     | 252   | 271  | 286  | 299  | 283  | 304  | 321  | 335  | 322  | 346  | 365  | 381  | 366  | 394  | 416  | 434  | 412  | 443  | 468  | 488  | 455  | 490  | 517  | 540  |      |
| Lo PR     | 113   | 120  | 131  | 140  | 119  | 127  | 139  | 148  | 124  | 132  | 144  | 154  | 130  | 139  | 151  | 161  | 137  | 145  | 159  | 169  | 141  | 150  | 164  | 175  |      |
| MBh       | 26.9  | 27.4 | 28.7 | 30.7 | 26.3 | 26.8 | 28.1 | 29.9 | 25.7 | 26.2 | 27.4 | 29.2 | 25.0 | 25.5 | 26.7 | 28.5 | 23.8 | 24.2 | 25.4 | 27.1 | 22.0 | 22.5 | 23.5 | 25.1 |      |
| S/T       | 0.92  | 0.89 | 0.80 | 0.65 | 0.96 | 0.92 | 0.83 | 0.68 | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.92 | 0.75 |      |
| ΔT        | 26    | 26   | 24   | 21   | 26   | 26   | 25   | 21   | 26   | 26   | 25   | 21   | 26   | 26   | 25   | 21   | 25   | 26   | 24   | 21   | 23   | 24   | 23   | 20   |      |
| kW        | 1.91  | 1.95 | 2.02 | 2.08 | 2.06 | 2.11 | 2.18 | 2.25 | 2.19 | 2.24 | 2.32 | 2.39 | 2.31 | 2.36 | 2.44 | 2.52 | 2.41 | 2.46 | 2.55 | 2.63 | 2.49 | 2.55 | 2.64 | 2.73 |      |
| Amps      | 8.8   | 8.9  | 9.2  | 9.4  | 9.3  | 9.5  | 9.8  | 10.1 | 10.0 | 10.2 | 10.5 | 10.8 | 10.6 | 10.8 | 11.1 | 11.4 | 11.1 | 11.4 | 11.7 | 12.1 | 11.7 | 12.0 | 12.3 | 12.7 |      |
| Hi PR     | 244   | 263  | 278  | 290  | 274  | 295  | 312  | 325  | 312  | 336  | 355  | 370  | 355  | 382  | 404  | 421  | 400  | 430  | 454  | 474  | 442  | 475  | 502  | 523  |      |
| Lo PR     | 110   | 117  | 127  | 136  | 116  | 123  | 135  | 143  | 120  | 128  | 140  | 149  | 126  | 135  | 147  | 156  | 133  | 141  | 154  | 164  | 137  | 146  | 159  | 170  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |    |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
|       |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |    |
|       |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| 70    | MBh     | 35.3                        | 36.6 | 40.1 | -    | 34.5 | 35.8 | 39.2 | -    | 33.7 | 34.9 | 38.3 | -    | 32.9                                 | 34.1 | 37.3 | -    | 31.2  | 32.4 | 35.5 | -    | 28.9  | 30.0 | 32.9 | -  |
|       | S/T     | 0.79                        | 0.66 | 0.46 | -    | 0.82 | 0.68 | 0.47 | -    | 0.84 | 0.70 | 0.49 | -    | 0.87                                 | 0.72 | 0.50 | -    | 0.90  | 0.75 | 0.52 | -    | 0.91  | 0.76 | 0.53 | -  |
|       | ΔT      | 19                          | 16   | 12   | -    | 19   | 16   | 12   | -    | 19   | 16   | 12   | -    | 19                                   | 16   | 12   | -    | 19    | 16   | 12   | -    | 17    | 15   | 11   | -  |
|       | kW      | 2.34                        | 2.39 | 2.46 | -    | 2.52 | 2.57 | 2.65 | -    | 2.67 | 2.73 | 2.82 | -    | 2.81                                 | 2.87 | 2.97 | -    | 2.93  | 2.99 | 3.09 | -    | 3.03  | 3.10 | 3.20 | -  |
|       | Amps    | 9.7                         | 9.9  | 10.2 | -    | 10.4 | 10.6 | 10.9 | -    | 11.2 | 11.4 | 11.8 | -    | 11.9                                 | 12.2 | 12.5 | -    | 12.6  | 12.9 | 13.2 | -    | 13.3  | 13.5 | 14.0 | -  |
|       | Hi PR   | 234                         | 252  | 266  | -    | 263  | 283  | 299  | -    | 299  | 322  | 340  | -    | 340                                  | 366  | 387  | -    | 383   | 412  | 435  | -    | 423   | 455  | 481  | -  |
|       | Lo PR   | 108                         | 115  | 126  | -    | 115  | 122  | 133  | -    | 119  | 127  | 138  | -    | 125                                  | 133  | 145  | -    | 131   | 139  | 152  | -    | 136   | 144  | 157  | -  |
|       | MBh     | 34.3                        | 35.6 | 39.0 | -    | 33.5 | 34.7 | 38.1 | -    | 32.7 | 33.9 | 37.2 | -    | 31.9                                 | 33.1 | 36.2 | -    | 30.3  | 31.4 | 34.4 | -    | 28.1  | 29.1 | 31.9 | -  |
|       | S/T     | 0.75                        | 0.63 | 0.44 | -    | 0.78 | 0.65 | 0.45 | -    | 0.80 | 0.67 | 0.46 | -    | 0.83                                 | 0.69 | 0.48 | -    | 0.86  | 0.72 | 0.50 | -    | 0.87  | 0.72 | 0.50 | -  |
|       | ΔT      | 19                          | 17   | 13   | -    | 20   | 17   | 13   | -    | 20   | 17   | 13   | -    | 20                                   | 17   | 13   | -    | 19    | 17   | 13   | -    | 18    | 16   | 12   | -  |
| kW    | 2.32    | 2.37                        | 2.44 | -    | 2.50 | 2.55 | 2.63 | -    | 2.65 | 2.71 | 2.80 | -    | 2.79 | 2.85                                 | 2.94 | -    | 2.90 | 2.97  | 3.06 | -    | 3.00 | 3.07  | 3.17 | -    |    |
| Amps  | 9.7     | 9.9                         | 10.1 | -    | 10.3 | 10.6 | 10.9 | -    | 11.1 | 11.4 | 11.7 | -    | 11.8 | 12.1                                 | 12.4 | -    | 12.5 | 12.7  | 13.1 | -    | 13.1 | 13.4  | 13.8 | -    |    |
| Hi PR | 232     | 249                         | 263  | -    | 260  | 280  | 296  | -    | 296  | 318  | 336  | -    | 337  | 363                                  | 383  | -    | 379  | 408   | 431  | -    | 419  | 451   | 476  | -    |    |
| Lo PR | 107     | 114                         | 125  | -    | 113  | 121  | 132  | -    | 118  | 125  | 137  | -    | 124  | 132                                  | 144  | -    | 130  | 138   | 151  | -    | 134  | 143   | 156  | -    |    |
| MBh   | 31.7    | 32.8                        | 36.0 | -    | 30.9 | 32.1 | 35.1 | -    | 30.2 | 31.3 | 34.3 | -    | 29.5 | 30.5                                 | 33.5 | -    | 28.0 | 29.0  | 31.8 | -    | 25.9 | 26.9  | 29.4 | -    |    |
| S/T   | 0.73    | 0.61                        | 0.42 | -    | 0.75 | 0.63 | 0.44 | -    | 0.77 | 0.65 | 0.45 | -    | 0.80 | 0.67                                 | 0.46 | -    | 0.83 | 0.69  | 0.48 | -    | 0.83 | 0.70  | 0.48 | -    |    |
| ΔT    | 20      | 17                          | 13   | -    | 20   | 17   | 13   | -    | 20   | 17   | 13   | -    | 20   | 17                                   | 13   | -    | 20   | 17    | 13   | -    | 18   | 16    | 12   | -    |    |
| kW    | 2.27    | 2.32                        | 2.39 | -    | 2.44 | 2.49 | 2.57 | -    | 2.59 | 2.64 | 2.73 | -    | 2.72 | 2.78                                 | 2.87 | -    | 2.83 | 2.89  | 2.99 | -    | 2.93 | 2.99  | 3.09 | -    |    |
| Amps  | 9.4     | 9.6                         | 9.9  | -    | 10.1 | 10.3 | 10.6 | -    | 10.8 | 11.1 | 11.4 | -    | 11.5 | 11.8                                 | 12.1 | -    | 12.2 | 12.4  | 12.8 | -    | 12.8 | 13.1  | 13.5 | -    |    |
| Hi PR | 225     | 242                         | 256  | -    | 252  | 272  | 287  | -    | 287  | 309  | 326  | -    | 327  | 352                                  | 371  | -    | 368  | 396   | 418  | -    | 406  | 437   | 462  | -    |    |
| Lo PR | 104     | 111                         | 121  | -    | 110  | 117  | 128  | -    | 114  | 122  | 133  | -    | 120  | 128                                  | 139  | -    | 126  | 134   | 146  | -    | 130  | 139   | 151  | -    |    |

|       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75    | MBh   | 35.9 | 37.0 | 40.1 | 43.0 | 35.1 | 36.1 | 39.1 | 42.0 | 34.3 | 35.3 | 38.2 | 41.0 | 33.4 | 34.4 | 37.3 | 40.0 | 31.8 | 32.7 | 35.4 | 38.0 | 29.4 | 30.3 | 32.8 | 35.2 |
|       | S/T   | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.41 | 0.96 | 0.85 | 0.65 | 0.42 | 0.99 | 0.88 | 0.67 | 0.43 | 1.00 | 0.92 | 0.69 | 0.45 | 1.00 | 0.92 | 0.70 | 0.45 |
|       | ΔT    | 22   | 20   | 16   | 11   | 22   | 20   | 16   | 11   | 22   | 20   | 16   | 11   | 22   | 20   | 17   | 11   | 21   | 20   | 16   | 11   | 20   | 19   | 15   | 11   |
|       | kW    | 2.36 | 2.41 | 2.48 | 2.56 | 2.54 | 2.59 | 2.67 | 2.76 | 2.70 | 2.75 | 2.84 | 2.93 | 2.83 | 2.90 | 2.99 | 3.09 | 2.95 | 3.02 | 3.12 | 3.22 | 3.05 | 3.12 | 3.23 | 3.33 |
|       | Amps  | 9.8  | 10.0 | 10.3 | 10.6 | 10.5 | 10.7 | 11.0 | 11.4 | 11.3 | 11.5 | 11.9 | 12.3 | 12.0 | 12.3 | 12.6 | 13.1 | 12.7 | 13.0 | 13.4 | 13.8 | 13.4 | 13.7 | 14.1 | 14.6 |
|       | Hi PR | 237  | 255  | 269  | 280  | 265  | 286  | 302  | 315  | 302  | 325  | 343  | 358  | 344  | 370  | 391  | 407  | 387  | 416  | 439  | 458  | 427  | 460  | 486  | 506  |
|       | Lo PR | 110  | 117  | 127  | 135  | 116  | 123  | 134  | 143  | 120  | 128  | 140  | 149  | 126  | 134  | 147  | 156  | 132  | 141  | 154  | 164  | 137  | 146  | 159  | 169  |
|       | MBh   | 34.9 | 35.9 | 38.9 | 41.7 | 34.1 | 35.1 | 38.0 | 40.8 | 33.3 | 34.3 | 37.1 | 39.8 | 32.5 | 33.4 | 36.2 | 38.8 | 30.8 | 31.8 | 34.4 | 36.9 | 28.6 | 29.4 | 31.8 | 34.2 |
|       | S/T   | 0.86 | 0.77 | 0.58 | 0.37 | 0.89 | 0.79 | 0.60 | 0.39 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.98 | 0.87 | 0.66 | 0.42 | 0.98 | 0.88 | 0.67 | 0.43 |
|       | ΔT    | 22   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 22   | 21   | 17   | 12   | 21   | 19   | 16   | 11   |
| kW    | 2.34  | 2.39 | 2.46 | 2.54 | 2.52 | 2.57 | 2.65 | 2.74 | 2.67 | 2.73 | 2.82 | 2.91 | 2.81 | 2.87 | 2.97 | 3.06 | 2.93 | 2.99 | 3.09 | 3.19 | 3.03 | 3.10 | 3.20 | 3.31 |      |
| Amps  | 9.7   | 9.9  | 10.2 | 10.6 | 10.4 | 10.6 | 10.9 | 11.3 | 11.2 | 11.5 | 11.8 | 12.2 | 11.9 | 12.2 | 12.5 | 12.9 | 12.6 | 12.9 | 13.2 | 13.7 | 13.3 | 13.5 | 14.0 | 14.4 |      |
| Hi PR | 234   | 252  | 266  | 278  | 263  | 283  | 299  | 311  | 299  | 322  | 340  | 354  | 340  | 366  | 387  | 403  | 383  | 412  | 435  | 454  | 423  | 455  | 481  | 501  |      |
| Lo PR | 108   | 115  | 126  | 134  | 115  | 122  | 133  | 142  | 119  | 127  | 138  | 147  | 125  | 133  | 145  | 155  | 131  | 139  | 152  | 162  | 136  | 144  | 157  | 168  |      |
| MBh   | 32.2  | 33.2 | 35.9 | 38.5 | 31.5 | 32.4 | 35.1 | 37.6 | 30.7 | 31.6 | 34.2 | 36.7 | 30.0 | 30.8 | 33.4 | 35.8 | 28.5 | 29.3 | 31.7 | 34.0 | 26.4 | 27.1 | 29.4 | 31.5 |      |
| S/T   | 0.83  | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.59 | 0.38 | 0.91 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 |      |
| ΔT    | 23    | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 21   | 20   | 16   | 11   |      |
| kW    | 2.29  | 2.33 | 2.41 | 2.48 | 2.46 | 2.51 | 2.59 | 2.67 | 2.61 | 2.66 | 2.75 | 2.84 | 2.74 | 2.80 | 2.89 | 2.99 | 2.86 | 2.92 | 3.01 | 3.11 | 2.95 | 3.02 | 3.12 | 3.22 |      |
| Amps  | 9.5   | 9.7  | 10.0 | 10.3 | 10.2 | 10.4 | 10.7 | 11.0 | 10.9 | 11.2 | 11.5 | 11.9 | 11.6 | 11.9 | 12.2 | 12.6 | 12.3 | 12.5 | 12.9 | 13.4 | 12.9 | 13.2 | 13.6 | 14.1 |      |
| Hi PR | 227   | 244  | 258  | 269  | 255  | 274  | 290  | 302  | 290  | 312  | 329  | 344  | 330  | 355  | 375  | 391  | 371  | 400  | 422  | 440  | 410  | 442  | 466  | 486  |      |
| Lo PR | 105   | 112  | 122  | 130  | 111  | 118  | 129  | 137  | 115  | 123  | 134  | 143  | 121  | 129  | 141  | 150  | 127  | 135  | 148  | 157  | 132  | 140  | 153  | 163  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |      |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|------|
|       |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |      |
|       |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |      |
| 80    | 1381    | MBh                         | 36.6 | 37.4 | 39.9 | 42.7 | 35.7 | 36.5 | 39.0 | 41.7 | 34.9 | 35.6 | 38.1 | 40.7 | 34.0 | 34.8 | 37.1 | 39.7  | 32.3 | 33.0 | 35.3 | 37.7  | 29.9 | 30.6 | 32.7 | 34.9 |
|       |         | S/T                         | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.96 | 0.78 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62  | 1.00 | 1.00 | 0.86 | 0.64  | 1.00 | 1.00 | 0.86 | 0.65 |
|       | ΔT      | 24                          | 23   | 20   | 16   | 24   | 23   | 20   | 16   | 23   | 24   | 20   | 16   | 23   | 23   | 20   | 16   | 22    | 22   | 20   | 16   | 20    | 20   | 19   | 15   |      |
|       | KW      | 2.38                        | 2.43 | 2.50 | 2.58 | 2.56 | 2.61 | 2.70 | 2.78 | 2.72 | 2.78 | 2.87 | 2.96 | 2.86 | 2.92 | 3.02 | 3.12 | 2.98  | 3.04 | 3.14 | 3.25 | 3.08  | 3.15 | 3.25 | 3.36 |      |
|       | Amps    | 9.9                         | 10.1 | 10.4 | 10.7 | 10.6 | 10.8 | 11.1 | 11.5 | 11.4 | 11.6 | 12.0 | 12.4 | 12.1 | 12.4 | 12.7 | 13.2 | 12.8  | 13.1 | 13.5 | 13.9 | 13.5  | 13.8 | 14.2 | 14.7 |      |
|       | Hi PR   | 239                         | 257  | 271  | 283  | 268  | 288  | 305  | 318  | 305  | 328  | 346  | 361  | 347  | 374  | 395  | 412  | 391   | 420  | 444  | 463  | 432   | 465  | 490  | 512  |      |
|       | Lo PR   | 111                         | 118  | 128  | 137  | 117  | 124  | 136  | 145  | 121  | 129  | 141  | 150  | 128  | 136  | 148  | 158  | 134   | 142  | 155  | 165  | 138   | 147  | 161  | 171  |      |
|       | MBh     | 35.5                        | 36.3 | 38.8 | 41.4 | 34.7 | 35.4 | 37.9 | 40.5 | 33.9 | 34.6 | 37.0 | 39.5 | 33.0 | 33.8 | 36.1 | 38.6 | 31.4  | 32.1 | 34.3 | 36.6 | 29.1  | 29.7 | 31.7 | 33.9 |      |
|       | S/T     | 0.94                        | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.56 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00  | 1.00 | 0.82 | 0.61 | 1.00  | 1.00 | 0.82 | 0.62 |      |
|       | ΔT      | 25                          | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 23    | 24   | 21   | 17   | 22    | 22   | 20   | 16   |      |
| KW    | 2.36    | 2.41                        | 2.48 | 2.56 | 2.54 | 2.59 | 2.67 | 2.76 | 2.70 | 2.75 | 2.84 | 2.93 | 2.83 | 2.90 | 2.99 | 3.09 | 2.95 | 3.02  | 3.12 | 3.22 | 3.05 | 3.12  | 3.23 | 3.33 |      |      |
| Amps  | 9.8     | 10.0                        | 10.3 | 10.6 | 10.5 | 10.7 | 11.0 | 11.4 | 11.3 | 11.5 | 11.9 | 12.3 | 12.0 | 12.3 | 12.6 | 13.1 | 12.7 | 13.0  | 13.4 | 13.8 | 13.4 | 13.7  | 14.1 | 14.6 |      |      |
| Hi PR | 237     | 255                         | 269  | 280  | 265  | 286  | 302  | 315  | 302  | 325  | 343  | 358  | 344  | 370  | 391  | 408  | 387  | 416   | 440  | 458  | 427  | 460   | 486  | 507  |      |      |
| Lo PR | 110     | 117                         | 127  | 135  | 116  | 123  | 134  | 143  | 120  | 128  | 140  | 149  | 126  | 134  | 147  | 156  | 132  | 141   | 154  | 164  | 137  | 146   | 159  | 169  |      |      |
| MBh   | 32.8    | 33.5                        | 35.8 | 38.3 | 32.0 | 32.7 | 35.0 | 37.4 | 31.3 | 31.9 | 34.1 | 36.5 | 30.5 | 31.2 | 33.3 | 35.6 | 29.0 | 29.6  | 31.6 | 33.8 | 26.8 | 27.4  | 29.3 | 31.3 |      |      |
| S/T   | 0.91    | 0.85                        | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.96 | 0.90 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.57 | 1.03 | 0.97  | 0.79 | 0.59 | 1.04 | 0.98  | 0.79 | 0.59 |      |      |
| ΔT    | 25      | 24                          | 21   | 17   | 26   | 25   | 21   | 17   | 26   | 25   | 21   | 17   | 26   | 25   | 22   | 17   | 25   | 24    | 21   | 17   | 24   | 23    | 20   | 16   |      |      |
| KW    | 2.30    | 2.35                        | 2.42 | 2.50 | 2.48 | 2.53 | 2.61 | 2.69 | 2.63 | 2.69 | 2.77 | 2.86 | 2.76 | 2.82 | 2.92 | 3.01 | 2.88 | 2.94  | 3.04 | 3.14 | 2.98 | 3.04  | 3.14 | 3.25 |      |      |
| Amps  | 9.6     | 9.8                         | 10.1 | 10.4 | 10.3 | 10.5 | 10.8 | 11.1 | 11.0 | 11.3 | 11.6 | 12.0 | 11.7 | 12.0 | 12.3 | 12.7 | 12.4 | 12.6  | 13.0 | 13.5 | 13.0 | 13.3  | 13.7 | 14.2 |      |      |
| Hi PR | 229     | 247                         | 261  | 272  | 257  | 277  | 293  | 305  | 293  | 315  | 333  | 347  | 334  | 359  | 379  | 395  | 375  | 404   | 426  | 445  | 415  | 446   | 471  | 491  |      |      |
| Lo PR | 106     | 113                         | 123  | 131  | 112  | 119  | 130  | 139  | 117  | 124  | 135  | 144  | 123  | 130  | 142  | 152  | 128  | 137   | 149  | 159  | 133  | 141   | 154  | 164  |      |      |

|       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 85    | 1381  | MBh  | 37.2 | 37.9 | 39.7 | 42.4 | 36.4 | 37.1 | 38.8 | 41.4 | 35.5 | 36.2 | 37.9 | 40.4 | 34.6 | 35.3 | 37.0 | 39.4 | 32.9 | 33.5 | 35.1 | 37.5 | 30.5 | 31.1 | 32.5 | 34.7 |
|       |       | S/T  | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.84 |
|       | ΔT    | 25   | 25   | 24   | 21   | 24   | 25   | 24   | 21   | 24   | 24   | 24   | 21   | 23   | 24   | 24   | 21   | 22   | 22   | 23   | 21   | 20   | 21   | 22   | 19   |      |
|       | KW    | 2.40 | 2.45 | 2.52 | 2.60 | 2.58 | 2.63 | 2.72 | 2.81 | 2.74 | 2.80 | 2.89 | 2.98 | 2.88 | 2.94 | 3.04 | 3.14 | 3.00 | 3.07 | 3.17 | 3.27 | 3.11 | 3.17 | 3.28 | 3.39 |      |
|       | Amps  | 10.0 | 10.2 | 10.5 | 10.8 | 10.7 | 10.9 | 11.2 | 11.6 | 11.5 | 11.7 | 12.1 | 12.5 | 12.2 | 12.5 | 12.8 | 13.3 | 12.9 | 13.2 | 13.6 | 14.1 | 13.6 | 13.9 | 14.3 | 14.8 |      |
|       | Hi PR | 241  | 260  | 274  | 286  | 271  | 291  | 308  | 321  | 308  | 331  | 350  | 365  | 351  | 377  | 399  | 416  | 395  | 425  | 448  | 468  | 436  | 469  | 495  | 517  |      |
|       | Lo PR | 112  | 119  | 130  | 138  | 118  | 126  | 137  | 146  | 123  | 131  | 142  | 152  | 129  | 137  | 150  | 159  | 135  | 144  | 157  | 167  | 140  | 149  | 162  | 173  |      |
|       | MBh   | 36.1 | 36.8 | 38.6 | 41.2 | 35.3 | 36.0 | 37.7 | 40.2 | 34.5 | 35.1 | 36.8 | 39.2 | 33.6 | 34.3 | 35.9 | 38.3 | 31.9 | 32.6 | 34.1 | 36.4 | 29.6 | 30.2 | 31.6 | 33.7 |      |
|       | S/T   | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.98 | 0.79 | 1.00 | 1.00 | 0.99 | 0.80 |      |
|       | ΔT    | 27   | 26   | 25   | 21   | 26   | 27   | 25   | 22   | 26   | 26   | 25   | 22   | 25   | 26   | 25   | 22   | 24   | 24   | 25   | 22   | 22   | 23   | 23   | 20   |      |
| KW    | 2.38  | 2.43 | 2.50 | 2.58 | 2.56 | 2.61 | 2.70 | 2.78 | 2.72 | 2.78 | 2.87 | 2.96 | 2.86 | 2.92 | 3.02 | 3.12 | 2.98 | 3.04 | 3.14 | 3.25 | 3.08 | 3.15 | 3.25 | 3.36 |      |      |
| Amps  | 9.9   | 10.1 | 10.4 | 10.7 | 10.6 | 10.8 | 11.1 | 11.5 | 11.4 | 11.6 | 12.0 | 12.4 | 12.1 | 12.4 | 12.7 | 13.2 | 12.8 | 13.1 | 13.5 | 13.9 | 13.5 | 13.8 | 14.2 | 14.7 |      |      |
| Hi PR | 239   | 257  | 271  | 283  | 268  | 288  | 305  | 318  | 305  | 328  | 346  | 361  | 347  | 374  | 395  | 412  | 391  | 420  | 444  | 463  | 432  | 465  | 490  | 512  |      |      |
| Lo PR | 111   | 118  | 128  | 137  | 117  | 124  | 136  | 145  | 121  | 129  | 141  | 150  | 128  | 136  | 148  | 158  | 134  | 142  | 155  | 165  | 138  | 147  | 161  | 171  |      |      |
| MBh   | 33.4  | 34.0 | 35.6 | 38.0 | 32.6 | 33.2 | 34.8 | 37.1 | 31.8 | 32.4 | 34.0 | 36.2 | 31.0 | 31.6 | 33.1 | 35.3 | 29.5 | 30.0 | 31.5 | 33.6 | 27.3 | 27.8 | 29.1 | 31.1 |      |      |
| S/T   | 0.95  | 0.92 | 0.83 | 0.67 | 0.98 | 0.95 | 0.86 | 0.70 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.95 | 0.77 |      |      |
| ΔT    | 27    | 27   | 25   | 22   | 27   | 27   | 25   | 22   | 27   | 27   | 25   | 22   | 26   | 27   | 26   | 22   | 25   | 26   | 25   | 22   | 23   | 24   | 24   | 20   |      |      |
| KW    | 2.32  | 2.37 | 2.44 | 2.52 | 2.50 | 2.55 | 2.63 | 2.71 | 2.65 | 2.71 | 2.79 | 2.89 | 2.79 | 2.85 | 2.94 | 3.04 | 2.90 | 2.97 | 3.06 | 3.17 | 3.00 | 3.07 | 3.17 | 3.28 |      |      |
| Amps  | 9.7   | 9.9  | 10.1 | 10.5 | 10.3 | 10.5 | 10.9 | 11.2 | 11.1 | 11.4 | 11.7 | 12.1 | 11.8 | 12.0 | 12.4 | 12.8 | 12.5 | 12.7 | 13.1 | 13.6 | 13.1 | 13.4 | 13.8 | 14.3 |      |      |
| Hi PR | 232   | 249  | 263  | 275  | 260  | 280  | 295  | 308  | 296  | 318  | 336  | 351  | 337  | 362  | 383  | 399  | 379  | 408  | 431  | 449  | 419  | 451  | 476  | 496  |      |      |
| Lo PR | 107   | 114  | 125  | 133  | 113  | 121  | 132  | 140  | 118  | 125  | 137  | 146  | 124  | 132  | 144  | 153  | 130  | 138  | 151  | 160  | 134  | 143  | 156  | 166  |      |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB       |       | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |    |
|-----------|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
|           |       | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |    |
|           |       | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| <b>70</b> | MBh   | 39.4                        | 40.8 | 44.7 | -    | 38.5 | 39.9 | 43.7 | -    | 37.6 | 38.9 | 42.7 | -    | 36.6                                 | 38.0 | 41.6 | -    | 34.8  | 36.1 | 39.5 | -    | 32.3  | 33.4 | 36.6 | -  |
|           | S/T   | 0.74                        | 0.62 | 0.43 | -    | 0.77 | 0.64 | 0.45 | -    | 0.79 | 0.66 | 0.46 | -    | 0.81                                 | 0.68 | 0.47 | -    | 0.85  | 0.71 | 0.49 | -    | 0.85  | 0.71 | 0.49 | -  |
|           | ΔT    | 18                          | 16   | 12   | -    | 18   | 16   | 12   | -    | 18   | 16   | 12   | -    | 18                                   | 16   | 12   | -    | 18    | 16   | 12   | -    | 17    | 15   | 11   | -  |
|           | kW    | 2.69                        | 2.75 | 2.83 | -    | 2.89 | 2.96 | 3.05 | -    | 3.07 | 3.14 | 3.24 | -    | 3.23                                 | 3.30 | 3.40 | -    | 3.36  | 3.43 | 3.55 | -    | 3.48  | 3.55 | 3.67 | -  |
|           | Amps  | 13.0                        | 13.2 | 13.6 | -    | 13.8 | 14.1 | 14.4 | -    | 14.8 | 15.1 | 15.5 | -    | 15.6                                 | 15.9 | 16.3 | -    | 16.4  | 16.7 | 17.2 | -    | 17.2  | 17.6 | 18.0 | -  |
|           | Hi PR | 240                         | 259  | 273  | -    | 270  | 290  | 306  | -    | 307  | 330  | 348  | -    | 349                                  | 376  | 397  | -    | 393   | 423  | 446  | -    | 434   | 467  | 493  | -  |
|           | Lo PR | 107                         | 114  | 124  | -    | 113  | 120  | 131  | -    | 117  | 125  | 136  | -    | 123                                  | 131  | 143  | -    | 129   | 137  | 150  | -    | 133   | 142  | 155  | -  |
|           | MBh   | 38.3                        | 39.6 | 43.4 | -    | 37.4 | 38.7 | 42.4 | -    | 36.5 | 37.8 | 41.4 | -    | 35.6                                 | 36.9 | 40.4 | -    | 33.8  | 35.0 | 38.4 | -    | 31.3  | 32.5 | 35.6 | -  |
|           | S/T   | 0.71                        | 0.59 | 0.41 | -    | 0.73 | 0.61 | 0.42 | -    | 0.75 | 0.63 | 0.44 | -    | 0.78                                 | 0.65 | 0.45 | -    | 0.81  | 0.67 | 0.47 | -    | 0.81  | 0.68 | 0.47 | -  |
|           | ΔT    | 19                          | 16   | 12   | -    | 19   | 16   | 12   | -    | 19   | 16   | 13   | -    | 19                                   | 17   | 13   | -    | 19    | 16   | 12   | -    | 18    | 15   | 12   | -  |
| kW        | 2.67  | 2.73                        | 2.81 | -    | 2.87 | 2.93 | 3.02 | -    | 3.05 | 3.11 | 3.21 | -    | 3.20 | 3.27                                 | 3.38 | -    | 3.33 | 3.41  | 3.52 | -    | 3.45 | 3.52  | 3.64 | -    |    |
| Amps      | 12.9  | 13.2                        | 13.5 | -    | 13.7 | 14.0 | 14.3 | -    | 14.7 | 14.9 | 15.3 | -    | 15.5 | 15.8                                 | 16.2 | -    | 16.3 | 16.6  | 17.1 | -    | 17.1 | 17.4  | 17.9 | -    |    |
| Hi PR     | 238   | 256                         | 270  | -    | 267  | 287  | 303  | -    | 304  | 327  | 345  | -    | 346  | 372                                  | 393  | -    | 389  | 419   | 442  | -    | 430  | 462   | 488  | -    |    |
| Lo PR     | 106   | 112                         | 123  | -    | 112  | 119  | 130  | -    | 116  | 123  | 135  | -    | 122  | 130                                  | 142  | -    | 128  | 136   | 148  | -    | 132  | 141   | 154  | -    |    |
| MBh       | 35.3  | 36.6                        | 40.1 | -    | 34.5 | 35.7 | 39.2 | -    | 33.7 | 34.9 | 38.2 | -    | 32.8 | 34.0                                 | 37.3 | -    | 31.2 | 32.3  | 35.4 | -    | 28.9 | 30.0  | 32.8 | -    |    |
| S/T       | 0.68  | 0.57                        | 0.40 | -    | 0.71 | 0.59 | 0.41 | -    | 0.73 | 0.61 | 0.42 | -    | 0.75 | 0.63                                 | 0.43 | -    | 0.78 | 0.65  | 0.45 | -    | 0.78 | 0.65  | 0.45 | -    |    |
| ΔT        | 19    | 17                          | 13   | -    | 19   | 17   | 13   | -    | 19   | 17   | 13   | -    | 19   | 17                                   | 13   | -    | 19   | 17    | 13   | -    | 18   | 16    | 12   | -    |    |
| kW        | 2.61  | 2.66                        | 2.75 | -    | 2.80 | 2.86 | 2.95 | -    | 2.97 | 3.04 | 3.13 | -    | 3.13 | 3.19                                 | 3.29 | -    | 3.25 | 3.32  | 3.43 | -    | 3.36 | 3.44  | 3.55 | -    |    |
| Amps      | 12.6  | 12.9                        | 13.2 | -    | 13.4 | 13.7 | 14.0 | -    | 14.3 | 14.6 | 15.0 | -    | 15.1 | 15.4                                 | 15.8 | -    | 15.9 | 16.2  | 16.7 | -    | 16.7 | 17.0  | 17.5 | -    |    |
| Hi PR     | 231   | 248                         | 262  | -    | 259  | 279  | 294  | -    | 294  | 317  | 335  | -    | 335  | 361                                  | 381  | -    | 377  | 406   | 429  | -    | 417  | 449   | 474  | -    |    |
| Lo PR     | 103   | 109                         | 119  | -    | 108  | 115  | 126  | -    | 113  | 120  | 131  | -    | 118  | 126                                  | 137  | -    | 124  | 132   | 144  | -    | 128  | 136   | 149  | -    |    |

|           |       |      |      |      |      |      |      |      |      |      |      |      |      |             |             |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|------|------|------|------|------|------|------|------|------|------|------|------|-------------|-------------|------|------|------|------|------|------|------|------|------|------|
| <b>75</b> | MBh   | 40.1 | 41.3 | 44.7 | 47.9 | 39.1 | 40.3 | 43.6 | 46.8 | 38.2 | 39.3 | 42.6 | 45.7 | 37.3        | <b>38.4</b> | 41.5 | 44.6 | 35.4 | 36.5 | 39.5 | 42.3 | 32.8 | 33.8 | 36.6 | 39.2 |
|           | S/T   | 0.84 | 0.76 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.93        | <b>0.83</b> | 0.63 | 0.40 | 0.96 | 0.86 | 0.65 | 0.42 | 0.97 | 0.87 | 0.66 | 0.42 |
|           | ΔT    | 21   | 19   | 16   | 11   | 21   | 19   | 16   | 11   | 21   | 19   | 16   | 11   | 21          | <b>20</b>   | 16   | 11   | 21   | 19   | 16   | 11   | 20   | 18   | 15   | 10   |
|           | kW    | 2.71 | 2.77 | 2.86 | 2.95 | 2.92 | 2.98 | 3.07 | 3.17 | 3.10 | 3.16 | 3.26 | 3.37 | 3.26        | <b>3.33</b> | 3.43 | 3.54 | 3.39 | 3.46 | 3.58 | 3.69 | 3.51 | 3.58 | 3.70 | 3.82 |
|           | Amps  | 13.1 | 13.3 | 13.7 | 14.1 | 13.9 | 14.2 | 14.6 | 15.0 | 14.9 | 15.2 | 15.6 | 16.0 | 15.7        | <b>16.0</b> | 16.4 | 17.0 | 16.5 | 16.9 | 17.3 | 17.9 | 17.3 | 17.7 | 18.2 | 18.8 |
|           | Hi PR | 243  | 261  | 276  | 288  | 272  | 293  | 309  | 323  | 310  | 333  | 352  | 367  | 353         | <b>380</b>  | 401  | 418  | 397  | 427  | 451  | 470  | 438  | 472  | 498  | 520  |
|           | Lo PR | 108  | 115  | 125  | 133  | 114  | 121  | 132  | 141  | 118  | 126  | 138  | 146  | 124         | <b>132</b>  | 144  | 154  | 130  | 139  | 151  | 161  | 135  | 143  | 157  | 167  |
|           | MBh   | 38.9 | 40.0 | 43.4 | 46.5 | 38.0 | 39.1 | 42.3 | 45.4 | 37.1 | 38.2 | 41.3 | 44.4 | 36.2        | <b>37.3</b> | 40.3 | 43.3 | 34.4 | 35.4 | 38.3 | 41.1 | 31.8 | 32.8 | 35.5 | 38.1 |
|           | S/T   | 0.81 | 0.72 | 0.54 | 0.35 | 0.83 | 0.75 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88        | <b>0.79</b> | 0.60 | 0.38 | 0.92 | 0.82 | 0.62 | 0.40 | 0.92 | 0.83 | 0.63 | 0.40 |
|           | ΔT    | 22   | 20   | 16   | 11   | 22   | 20   | 17   | 11   | 22   | 20   | 17   | 11   | 22          | <b>20</b>   | 17   | 12   | 22   | 20   | 16   | 11   | 20   | 19   | 15   | 11   |
| kW        | 2.69  | 2.75 | 2.83 | 2.92 | 2.89 | 2.96 | 3.05 | 3.15 | 3.07 | 3.14 | 3.24 | 3.34 | 3.23 | <b>3.30</b> | 3.40        | 3.52 | 3.36 | 3.44 | 3.55 | 3.66 | 3.48 | 3.55 | 3.67 | 3.79 |      |
| Amps      | 13.0  | 13.2 | 13.6 | 14.0 | 13.8 | 14.1 | 14.5 | 14.9 | 14.8 | 15.1 | 15.5 | 15.9 | 15.6 | <b>15.9</b> | 16.3        | 16.8 | 16.4 | 16.7 | 17.2 | 17.7 | 17.2 | 17.6 | 18.0 | 18.6 |      |
| Hi PR     | 240   | 259  | 273  | 285  | 270  | 290  | 306  | 320  | 307  | 330  | 348  | 363  | 349  | <b>376</b>  | 397         | 414  | 393  | 423  | 446  | 466  | 434  | 467  | 493  | 514  |      |
| Lo PR     | 107   | 114  | 124  | 132  | 113  | 120  | 131  | 140  | 117  | 125  | 136  | 145  | 123  | <b>131</b>  | 143         | 152  | 129  | 137  | 150  | 160  | 134  | 142  | 155  | 165  |      |
| MBh       | 35.9  | 37.0 | 40.0 | 42.9 | 35.1 | 36.1 | 39.1 | 41.9 | 34.2 | 35.2 | 38.2 | 40.9 | 33.4 | <b>34.4</b> | 37.2        | 39.9 | 31.7 | 32.7 | 35.4 | 38.0 | 29.4 | 30.3 | 32.8 | 35.2 |      |
| S/T       | 0.78  | 0.69 | 0.53 | 0.34 | 0.80 | 0.72 | 0.54 | 0.35 | 0.82 | 0.74 | 0.56 | 0.36 | 0.85 | <b>0.76</b> | 0.58        | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.89 | 0.80 | 0.60 | 0.39 |      |
| ΔT        | 22    | 20   | 17   | 11   | 22   | 21   | 17   | 12   | 22   | 21   | 17   | 12   | 22   | <b>21</b>   | 17          | 12   | 22   | 20   | 17   | 12   | 21   | 19   | 16   | 11   |      |
| kW        | 2.63  | 2.69 | 2.77 | 2.85 | 2.83 | 2.89 | 2.98 | 3.07 | 3.00 | 3.06 | 3.16 | 3.26 | 3.15 | <b>3.22</b> | 3.32        | 3.43 | 3.28 | 3.35 | 3.46 | 3.57 | 3.39 | 3.47 | 3.58 | 3.70 |      |
| Amps      | 12.7  | 13.0 | 13.3 | 13.7 | 13.5 | 13.8 | 14.1 | 14.6 | 14.4 | 14.7 | 15.1 | 15.6 | 15.2 | <b>15.5</b> | 16.0        | 16.4 | 16.0 | 16.3 | 16.8 | 17.3 | 16.8 | 17.1 | 17.6 | 18.2 |      |
| Hi PR     | 233   | 251  | 265  | 276  | 262  | 281  | 297  | 310  | 297  | 320  | 338  | 353  | 339  | <b>365</b>  | 385         | 401  | 381  | 410  | 433  | 452  | 421  | 453  | 478  | 499  |      |
| Lo PR     | 104   | 110  | 120  | 128  | 109  | 116  | 127  | 135  | 114  | 121  | 132  | 141  | 119  | <b>127</b>  | 139         | 148  | 125  | 133  | 145  | 155  | 130  | 138  | 150  | 160  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.-fan)

| IDB       | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |
|-----------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|
|           |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |
|           |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |
| <b>80</b> | MBh     | 40.8                        | 41.7 | 44.5 | 47.6 | 39.8 | 40.7 | 43.5 | 46.5 | 38.9 | 39.7 | 42.4 | 45.4 | 37.9 | 38.8 | 41.4 | 44.3 | 36.0  | 36.8 | 39.3 | 42.1 | 33.4  | 34.1 | 36.4 | 39.0 |
|           | S/T     | 0.93                        | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00  | 1.00 | 0.80 | 0.60 | 1.00  | 1.00 | 0.81 | 0.61 |
|           | ΔT      | 2.3                         | 2.2  | 1.9  | 1.6  | 2.4  | 2.3  | 2.0  | 1.6  | 2.4  | 2.3  | 2.0  | 1.6  | 2.3  | 2.3  | 2.0  | 1.6  | 2.2   | 2.3  | 2.0  | 1.6  | 2.1   | 2.1  | 1.8  | 1.5  |
|           | kW      | 2.74                        | 2.79 | 2.88 | 2.97 | 2.94 | 3.00 | 3.10 | 3.20 | 3.12 | 3.19 | 3.29 | 3.40 | 3.28 | 3.35 | 3.46 | 3.57 | 3.42  | 3.49 | 3.61 | 3.72 | 3.53  | 3.61 | 3.73 | 3.85 |
|           | Amps    | 13.2                        | 13.4 | 13.8 | 14.2 | 14.0 | 14.3 | 14.7 | 15.1 | 15.0 | 15.3 | 15.7 | 16.2 | 15.8 | 16.1 | 16.6 | 17.1 | 16.6  | 17.0 | 17.5 | 18.0 | 17.5  | 17.8 | 18.3 | 18.9 |
|           | Hi PR   | 245                         | 264  | 279  | 291  | 275  | 296  | 313  | 326  | 313  | 337  | 355  | 371  | 356  | 383  | 405  | 422  | 401   | 431  | 455  | 475  | 443   | 477  | 503  | 525  |
|           | Lo PR   | 109                         | 116  | 127  | 135  | 115  | 122  | 134  | 142  | 120  | 127  | 139  | 148  | 126  | 134  | 146  | 155  | 132   | 140  | 153  | 163  | 136   | 145  | 158  | 168  |
|           | MBh     | 39.6                        | 40.5 | 43.2 | 46.2 | 38.7 | 39.5 | 42.2 | 45.1 | 37.7 | 38.6 | 41.2 | 44.1 | 36.8 | 37.6 | 40.2 | 43.0 | 35.0  | 35.8 | 38.2 | 40.8 | 32.4  | 33.1 | 35.4 | 37.8 |
|           | S/T     | 0.88                        | 0.83 | 0.67 | 0.50 | 0.92 | 0.86 | 0.70 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00  | 0.94 | 0.77 | 0.57 | 1.00  | 0.95 | 0.77 | 0.58 |
|           | ΔT      | 2.4                         | 2.3  | 2.0  | 1.6  | 2.5  | 2.4  | 2.0  | 1.6  | 2.5  | 2.4  | 2.0  | 1.6  | 2.5  | 2.4  | 2.1  | 1.6  | 2.4   | 2.3  | 2.0  | 1.6  | 2.2   | 2.2  | 1.9  | 1.5  |
| kW        | 2.71    | 2.77                        | 2.86 | 2.95 | 2.92 | 2.98 | 3.07 | 3.17 | 3.10 | 3.16 | 3.26 | 3.37 | 3.26 | 3.33 | 3.43 | 3.55 | 3.39 | 3.46  | 3.58 | 3.69 | 3.51 | 3.58  | 3.70 | 3.82 |      |
| Amps      | 13.1    | 13.3                        | 13.7 | 14.1 | 13.9 | 14.2 | 14.6 | 15.0 | 14.9 | 15.2 | 15.6 | 16.1 | 15.7 | 16.0 | 16.5 | 17.0 | 16.5 | 16.9  | 17.3 | 17.9 | 17.3 | 17.7  | 18.2 | 18.8 |      |
| Hi PR     | 243     | 261                         | 276  | 288  | 272  | 293  | 309  | 323  | 310  | 333  | 352  | 367  | 353  | 380  | 401  | 418  | 397  | 427   | 451  | 470  | 438  | 472   | 498  | 520  |      |
| Lo PR     | 108     | 115                         | 125  | 133  | 114  | 121  | 132  | 141  | 118  | 126  | 138  | 147  | 124  | 132  | 145  | 154  | 130  | 139   | 151  | 161  | 135  | 143   | 157  | 167  |      |
| MBh       | 36.5    | 37.3                        | 39.9 | 42.6 | 35.7 | 36.5 | 39.0 | 41.7 | 34.8 | 35.6 | 38.0 | 40.7 | 34.0 | 34.7 | 37.1 | 39.7 | 32.3 | 33.0  | 35.3 | 37.7 | 29.9 | 30.6  | 32.7 | 34.9 |      |
| S/T       | 0.85    | 0.80                        | 0.65 | 0.49 | 0.88 | 0.83 | 0.67 | 0.50 | 0.90 | 0.85 | 0.69 | 0.52 | 0.93 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91  | 0.74 | 0.55 | 0.98 | 0.92  | 0.75 | 0.56 |      |
| ΔT        | 2.5     | 2.4                         | 2.1  | 1.6  | 2.5  | 2.4  | 2.1  | 1.7  | 2.5  | 2.4  | 2.1  | 1.7  | 2.5  | 2.4  | 2.1  | 1.7  | 2.5  | 2.4   | 2.1  | 1.6  | 2.3  | 2.2   | 1.9  | 1.5  |      |
| kW        | 2.65    | 2.71                        | 2.79 | 2.88 | 2.85 | 2.91 | 3.00 | 3.09 | 3.02 | 3.09 | 3.18 | 3.29 | 3.18 | 3.24 | 3.35 | 3.46 | 3.31 | 3.38  | 3.49 | 3.60 | 3.42 | 3.49  | 3.61 | 3.73 |      |
| Amps      | 12.8    | 13.1                        | 13.4 | 13.8 | 13.6 | 13.9 | 14.2 | 14.7 | 14.5 | 14.8 | 15.2 | 15.7 | 15.3 | 15.6 | 16.1 | 16.6 | 16.1 | 16.5  | 16.9 | 17.5 | 16.9 | 17.3  | 17.8 | 18.3 |      |
| Hi PR     | 235     | 253                         | 268  | 279  | 264  | 284  | 300  | 313  | 300  | 323  | 341  | 356  | 342  | 368  | 389  | 406  | 385  | 414   | 437  | 456  | 425  | 458   | 483  | 504  |      |
| Lo PR     | 105     | 111                         | 122  | 129  | 111  | 118  | 128  | 137  | 115  | 122  | 133  | 142  | 121  | 128  | 140  | 149  | 126  | 135   | 147  | 156  | 131  | 139   | 152  | 162  |      |

|           |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>85</b> | MBh   | 41.5 | 42.3 | 44.3 | 47.3 | 40.5 | 41.3 | 43.3 | 46.2 | 39.6 | 40.3 | 42.2 | 45.1 | 38.6 | 39.3 | 41.2 | 44.0 | 36.7 | 37.4 | 39.1 | 41.8 | 34.0 | 34.6 | 36.3 | 38.7 |
|           | S/T   | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.97 | 0.79 |
|           | ΔT    | 2.5  | 2.4  | 2.3  | 2.0  | 2.5  | 2.5  | 2.3  | 2.0  | 2.4  | 2.5  | 2.3  | 2.0  | 2.4  | 2.4  | 2.4  | 2.0  | 2.3  | 2.3  | 2.3  | 2.0  | 2.1  | 2.1  | 2.2  | 1.9  |
|           | kW    | 2.76 | 2.81 | 2.90 | 2.99 | 2.96 | 3.03 | 3.12 | 3.22 | 3.15 | 3.21 | 3.32 | 3.42 | 3.31 | 3.38 | 3.49 | 3.60 | 3.45 | 3.52 | 3.64 | 3.76 | 3.56 | 3.64 | 3.76 | 3.89 |
|           | Amps  | 13.3 | 13.5 | 13.9 | 14.3 | 14.1 | 14.4 | 14.8 | 15.2 | 15.1 | 15.4 | 15.8 | 16.3 | 15.9 | 16.3 | 16.7 | 17.2 | 16.8 | 17.1 | 17.6 | 18.2 | 17.6 | 18.0 | 18.5 | 19.1 |
|           | Hi PR | 248  | 266  | 281  | 293  | 278  | 299  | 316  | 329  | 316  | 340  | 359  | 374  | 360  | 387  | 409  | 426  | 405  | 436  | 460  | 480  | 447  | 481  | 508  | 530  |
|           | Lo PR | 110  | 117  | 128  | 136  | 116  | 124  | 135  | 144  | 121  | 129  | 140  | 149  | 127  | 135  | 147  | 157  | 133  | 142  | 154  | 165  | 138  | 146  | 160  | 170  |
|           | MBh   | 40.3 | 41.1 | 43.0 | 45.9 | 39.3 | 40.1 | 42.0 | 44.8 | 38.4 | 39.2 | 41.0 | 43.7 | 37.5 | 38.2 | 40.0 | 42.7 | 35.6 | 36.3 | 38.0 | 40.5 | 33.0 | 33.6 | 35.2 | 37.6 |
|           | S/T   | 0.93 | 0.89 | 0.81 | 0.65 | 0.96 | 0.93 | 0.84 | 0.68 | 0.98 | 0.95 | 0.86 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.93 | 0.75 |
|           | ΔT    | 2.6  | 2.5  | 2.4  | 2.1  | 2.6  | 2.6  | 2.4  | 2.1  | 2.6  | 2.6  | 2.4  | 2.1  | 2.6  | 2.6  | 2.5  | 2.1  | 2.5  | 2.5  | 2.4  | 2.1  | 2.3  | 2.3  | 2.3  | 2.0  |
| kW        | 2.74  | 2.79 | 2.88 | 2.97 | 2.94 | 3.00 | 3.10 | 3.20 | 3.12 | 3.19 | 3.29 | 3.40 | 3.28 | 3.35 | 3.46 | 3.57 | 3.42 | 3.49 | 3.61 | 3.72 | 3.53 | 3.61 | 3.73 | 3.85 |      |
| Amps      | 13.2  | 13.4 | 13.8 | 14.2 | 14.0 | 14.3 | 14.7 | 15.1 | 15.0 | 15.3 | 15.7 | 16.2 | 15.8 | 16.1 | 16.6 | 17.1 | 16.6 | 17.0 | 17.5 | 18.0 | 17.5 | 17.8 | 18.3 | 18.9 |      |
| Hi PR     | 245   | 264  | 279  | 291  | 275  | 296  | 313  | 326  | 313  | 337  | 355  | 371  | 356  | 383  | 405  | 422  | 401  | 431  | 455  | 475  | 443  | 477  | 503  | 525  |      |
| Lo PR     | 109   | 116  | 127  | 135  | 115  | 122  | 134  | 142  | 120  | 127  | 139  | 148  | 126  | 134  | 146  | 155  | 132  | 140  | 153  | 163  | 136  | 145  | 158  | 168  |      |
| MBh       | 37.2  | 37.9 | 39.7 | 42.3 | 36.3 | 37.0 | 38.8 | 41.4 | 35.5 | 36.1 | 37.8 | 40.4 | 34.6 | 35.3 | 36.9 | 39.4 | 32.9 | 33.5 | 35.1 | 37.4 | 30.4 | 31.0 | 32.5 | 34.7 |      |
| S/T       | 0.89  | 0.86 | 0.78 | 0.63 | 0.93 | 0.89 | 0.81 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 0.99 | 0.89 | 0.72 |      |
| ΔT        | 2.6   | 2.6  | 2.4  | 2.1  | 2.7  | 2.6  | 2.5  | 2.1  | 2.7  | 2.6  | 2.5  | 2.1  | 2.7  | 2.6  | 2.5  | 2.2  | 2.6  | 2.6  | 2.5  | 2.1  | 2.4  | 2.4  | 2.3  | 2.0  |      |
| kW        | 2.67  | 2.73 | 2.81 | 2.90 | 2.87 | 2.93 | 3.02 | 3.12 | 3.05 | 3.11 | 3.21 | 3.31 | 3.20 | 3.27 | 3.38 | 3.49 | 3.33 | 3.41 | 3.52 | 3.63 | 3.45 | 3.52 | 3.64 | 3.76 |      |
| Amps      | 12.9  | 13.1 | 13.5 | 13.9 | 13.7 | 14.0 | 14.3 | 14.8 | 14.7 | 14.9 | 15.3 | 15.8 | 15.5 | 15.8 | 16.2 | 16.7 | 16.3 | 16.6 | 17.1 | 17.6 | 17.1 | 17.4 | 17.9 | 18.5 |      |
| Hi PR     | 238   | 256  | 270  | 282  | 267  | 287  | 303  | 316  | 303  | 327  | 345  | 360  | 346  | 372  | 393  | 410  | 389  | 418  | 442  | 461  | 430  | 462  | 488  | 509  |      |
| Lo PR     | 106   | 112  | 123  | 131  | 112  | 119  | 130  | 138  | 116  | 123  | 135  | 144  | 122  | 130  | 142  | 151  | 128  | 136  | 148  | 158  | 132  | 141  | 153  | 163  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |    |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
|       |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |    |
|       |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| 70    | MBh     | 46.2                        | 47.9 | 52.5 | -    | 45.1 | 46.8 | 51.2 | -    | 44.1 | 45.7 | 50.0 | -    | 43.0                                 | 44.5 | 48.8 | -    | 40.8  | 42.3 | 46.4 | -    | 37.8  | 39.2 | 42.9 | -  |
|       | S/T     | 0.78                        | 0.65 | 0.45 | -    | 0.81 | 0.68 | 0.47 | -    | 0.83 | 0.70 | 0.48 | -    | 0.86                                 | 0.72 | 0.50 | -    | 0.89  | 0.75 | 0.52 | -    | 0.90  | 0.75 | 0.52 | -  |
|       | ΔT      | 19                          | 16   | 12   | -    | 19   | 16   | 12   | -    | 19   | 16   | 12   | -    | 19                                   | 16   | 12   | -    | 19    | 16   | 12   | -    | 17    | 15   | 11   | -  |
|       | kW      | 3.17                        | 3.24 | 3.34 | -    | 3.42 | 3.49 | 3.60 | -    | 3.63 | 3.71 | 3.83 | -    | 3.82                                 | 3.91 | 4.04 | -    | 3.98  | 4.07 | 4.21 | -    | 4.12  | 4.22 | 4.36 | -  |
|       | Amps    | 15.0                        | 15.3 | 15.7 | -    | 15.9 | 16.2 | 16.7 | -    | 17.0 | 17.4 | 17.9 | -    | 18.0                                 | 18.4 | 18.9 | -    | 19.0  | 19.4 | 19.9 | -    | 19.9  | 20.3 | 20.9 | -  |
|       | Hi PR   | 262                         | 282  | 298  | -    | 294  | 317  | 335  | -    | 335  | 360  | 380  | -    | 381                                  | 410  | 433  | -    | 429   | 462  | 488  | -    | 474   | 510  | 539  | -  |
|       | Lo PR   | 113                         | 120  | 131  | -    | 120  | 127  | 139  | -    | 124  | 132  | 144  | -    | 130                                  | 139  | 152  | -    | 137   | 145  | 159  | -    | 141   | 150  | 164  | -  |
|       | MBh     | 44.9                        | 46.5 | 50.9 | -    | 43.8 | 45.4 | 49.8 | -    | 42.8 | 44.3 | 48.6 | -    | 41.7                                 | 43.2 | 47.4 | -    | 39.6  | 41.1 | 45.0 | -    | 36.7  | 38.1 | 41.7 | -  |
|       | S/T     | 0.75                        | 0.62 | 0.43 | -    | 0.77 | 0.65 | 0.45 | -    | 0.79 | 0.66 | 0.46 | -    | 0.82                                 | 0.68 | 0.47 | -    | 0.85  | 0.71 | 0.49 | -    | 0.86  | 0.72 | 0.50 | -  |
|       | ΔT      | 19                          | 17   | 13   | -    | 20   | 17   | 13   | -    | 20   | 17   | 13   | -    | 20                                   | 17   | 13   | -    | 19    | 17   | 13   | -    | 18    | 16   | 12   | -  |
| kW    | 3.15    | 3.21                        | 3.32 | -    | 3.39 | 3.46 | 3.57 | -    | 3.60 | 3.68 | 3.80 | -    | 3.79 | 3.87                                 | 4.00 | -    | 3.95 | 4.04  | 4.17 | -    | 4.09 | 4.18  | 4.32 | -    |    |
| Amps  | 14.9    | 15.1                        | 15.5 | -    | 15.8 | 16.1 | 16.6 | -    | 16.9 | 17.3 | 17.7 | -    | 17.9 | 18.2                                 | 18.7 | -    | 18.8 | 19.2  | 19.8 | -    | 19.8 | 20.2  | 20.8 | -    |    |
| Hi PR | 260     | 280                         | 295  | -    | 291  | 314  | 331  | -    | 331  | 357  | 377  | -    | 378  | 406                                  | 429  | -    | 425  | 457   | 483  | -    | 469  | 505   | 533  | -    |    |
| Lo PR | 112     | 119                         | 130  | -    | 118  | 126  | 137  | -    | 123  | 131  | 143  | -    | 129  | 137                                  | 150  | -    | 135  | 144   | 157  | -    | 140  | 149   | 163  | -    |    |
| MBh   | 41.4    | 42.9                        | 47.0 | -    | 40.4 | 41.9 | 45.9 | -    | 39.5 | 40.9 | 44.8 | -    | 38.5 | 39.9                                 | 43.7 | -    | 36.6 | 37.9  | 41.5 | -    | 33.9 | 35.1  | 38.5 | -    |    |
| S/T   | 0.72    | 0.60                        | 0.42 | -    | 0.75 | 0.62 | 0.43 | -    | 0.77 | 0.64 | 0.44 | -    | 0.79 | 0.66                                 | 0.46 | -    | 0.82 | 0.69  | 0.47 | -    | 0.83 | 0.69  | 0.48 | -    |    |
| ΔT    | 20      | 17                          | 13   | -    | 20   | 17   | 13   | -    | 20   | 17   | 13   | -    | 20   | 17                                   | 13   | -    | 20   | 17    | 13   | -    | 18   | 16    | 12   | -    |    |
| kW    | 3.07    | 3.14                        | 3.24 | -    | 3.31 | 3.38 | 3.49 | -    | 3.51 | 3.59 | 3.71 | -    | 3.70 | 3.78                                 | 3.90 | -    | 3.85 | 3.94  | 4.07 | -    | 3.99 | 4.08  | 4.21 | -    |    |
| Amps  | 14.5    | 14.8                        | 15.2 | -    | 15.5 | 15.8 | 16.2 | -    | 16.5 | 16.9 | 17.3 | -    | 17.5 | 17.8                                 | 18.3 | -    | 18.4 | 18.8  | 19.3 | -    | 19.3 | 19.7  | 20.3 | -    |    |
| Hi PR | 252     | 271                         | 286  | -    | 283  | 304  | 321  | -    | 322  | 346  | 365  | -    | 366  | 394                                  | 416  | -    | 412  | 443   | 468  | -    | 455  | 490   | 517  | -    |    |
| Lo PR | 109     | 116                         | 126  | -    | 115  | 122  | 133  | -    | 119  | 127  | 139  | -    | 125  | 133                                  | 146  | -    | 131  | 140   | 153  | -    | 136  | 145   | 158  | -    |    |

|       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75    | MBh   | 47.0 | 48.4 | 52.4 | 56.2 | 45.9 | 47.2 | 51.1 | 54.9 | 44.8 | 46.1 | 49.9 | 53.6 | 43.7 | 45.0 | 48.7 | 52.3 | 41.5 | 42.7 | 46.3 | 49.7 | 38.5 | 39.6 | 42.9 | 46.0 |
|       | S/T   | 0.89 | 0.80 | 0.60 | 0.39 | 0.92 | 0.83 | 0.62 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.98 | 0.87 | 0.66 | 0.43 | 1.00 | 0.91 | 0.69 | 0.44 | 1.00 | 0.91 | 0.69 | 0.45 |
|       | ΔT    | 21   | 20   | 16   | 11   | 22   | 20   | 16   | 11   | 22   | 20   | 16   | 11   | 22   | 20   | 17   | 11   | 21   | 20   | 16   | 11   | 20   | 19   | 15   | 11   |
|       | kW    | 3.20 | 3.27 | 3.37 | 3.48 | 3.45 | 3.52 | 3.63 | 3.75 | 3.66 | 3.74 | 3.87 | 3.99 | 3.85 | 3.94 | 4.07 | 4.21 | 4.02 | 4.11 | 4.24 | 4.39 | 4.16 | 4.25 | 4.39 | 4.54 |
|       | Amps  | 15.1 | 15.4 | 15.8 | 16.2 | 16.1 | 16.4 | 16.8 | 17.3 | 17.2 | 17.5 | 18.0 | 18.6 | 18.1 | 18.5 | 19.0 | 19.6 | 19.1 | 19.5 | 20.1 | 20.7 | 20.1 | 20.5 | 21.1 | 21.8 |
|       | Hi PR | 265  | 285  | 301  | 314  | 297  | 320  | 338  | 352  | 338  | 364  | 384  | 401  | 385  | 415  | 438  | 457  | 433  | 466  | 492  | 514  | 479  | 515  | 544  | 568  |
|       | Lo PR | 114  | 122  | 133  | 141  | 121  | 128  | 140  | 149  | 125  | 133  | 146  | 155  | 132  | 140  | 153  | 163  | 138  | 147  | 160  | 171  | 143  | 152  | 166  | 177  |
|       | MBh   | 45.6 | 47.0 | 50.8 | 54.6 | 44.6 | 45.9 | 49.7 | 53.3 | 43.5 | 44.8 | 48.5 | 52.0 | 42.4 | 43.7 | 47.3 | 50.8 | 40.3 | 41.5 | 44.9 | 48.2 | 37.3 | 38.4 | 41.6 | 44.7 |
|       | S/T   | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.41 | 0.97 | 0.87 | 0.65 | 0.42 | 0.98 | 0.87 | 0.66 | 0.42 |
|       | ΔT    | 22   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 22   | 21   | 17   | 12   | 21   | 19   | 16   | 11   |
| kW    | 3.17  | 3.24 | 3.34 | 3.45 | 3.42 | 3.49 | 3.60 | 3.72 | 3.63 | 3.71 | 3.83 | 3.96 | 3.82 | 3.91 | 4.04 | 4.17 | 3.98 | 4.07 | 4.21 | 4.35 | 4.12 | 4.22 | 4.36 | 4.51 |      |
| Amps  | 15.0  | 15.3 | 15.7 | 16.1 | 15.9 | 16.2 | 16.7 | 17.2 | 17.0 | 17.4 | 17.9 | 18.4 | 18.0 | 18.4 | 18.9 | 19.5 | 19.0 | 19.4 | 19.9 | 20.6 | 19.9 | 20.3 | 20.9 | 21.6 |      |
| Hi PR | 262   | 282  | 298  | 311  | 294  | 317  | 335  | 349  | 335  | 360  | 381  | 397  | 381  | 410  | 433  | 452  | 429  | 462  | 488  | 509  | 474  | 510  | 539  | 562  |      |
| Lo PR | 113   | 120  | 131  | 140  | 120  | 127  | 139  | 148  | 124  | 132  | 144  | 154  | 131  | 139  | 152  | 161  | 137  | 146  | 159  | 169  | 141  | 150  | 164  | 175  |      |
| MBh   | 42.1  | 43.3 | 46.9 | 50.4 | 41.1 | 42.3 | 45.8 | 49.2 | 40.1 | 41.3 | 44.7 | 48.0 | 39.2 | 40.3 | 43.6 | 46.8 | 37.2 | 38.3 | 41.5 | 44.5 | 34.5 | 35.5 | 38.4 | 41.2 |      |
| S/T   | 0.82  | 0.73 | 0.55 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.41 | 0.94 | 0.84 | 0.64 | 0.41 |      |
| ΔT    | 23    | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 21   | 20   | 16   | 11   |      |
| kW    | 3.10  | 3.16 | 3.26 | 3.37 | 3.33 | 3.41 | 3.51 | 3.63 | 3.54 | 3.62 | 3.74 | 3.86 | 3.73 | 3.81 | 3.93 | 4.07 | 3.88 | 3.97 | 4.10 | 4.24 | 4.02 | 4.11 | 4.25 | 4.39 |      |
| Amps  | 14.7  | 14.9 | 15.3 | 15.8 | 15.6 | 15.9 | 16.3 | 16.8 | 16.7 | 17.0 | 17.5 | 18.0 | 17.6 | 18.0 | 18.4 | 19.0 | 18.5 | 18.9 | 19.4 | 20.1 | 19.5 | 19.9 | 20.4 | 21.1 |      |
| Hi PR | 255   | 274  | 289  | 302  | 286  | 307  | 325  | 339  | 325  | 350  | 369  | 385  | 370  | 398  | 420  | 438  | 416  | 448  | 473  | 493  | 460  | 495  | 523  | 545  |      |
| Lo PR | 110   | 117  | 127  | 136  | 116  | 123  | 135  | 143  | 121  | 128  | 140  | 149  | 127  | 135  | 147  | 157  | 133  | 141  | 154  | 164  | 137  | 146  | 159  | 170  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB       | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |      |
|-----------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|
|           |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |      |
|           |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |
| <b>80</b> | MBh     | 47.8                        | 48.9 | 52.2 | 55.8 | 46.7 | 47.7 | 51.0 | 54.5 | 45.6 | 46.6 | 49.8 | 53.2 | 44.5                                 | 45.5 | 48.6 | 51.9 | 42.3  | 43.2 | 46.1 | 49.3 | 39.1  | 40.0 | 42.7 | 45.7 |
|           | S/T     | 1.00                        | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.79 | 0.59 | 1.00                                 | 1.00 | 0.82 | 0.61 | 1.00  | 1.00 | 0.85 | 0.63 | 1.00  | 1.00 | 0.86 | 0.64 |
|           | ΔT      | 25                          | 23   | 20   | 16   | 24   | 23   | 20   | 16   | 23   | 24   | 20   | 16   | 23                                   | 23   | 20   | 16   | 22    | 22   | 20   | 16   | 20    | 21   | 19   | 15   |
|           | kW      | 3.22                        | 3.29 | 3.40 | 3.51 | 3.47 | 3.55 | 3.66 | 3.78 | 3.69 | 3.77 | 3.90 | 4.03 | 3.89                                 | 3.97 | 4.10 | 4.24 | 4.05  | 4.14 | 4.28 | 4.43 | 4.19  | 4.29 | 4.43 | 4.58 |
|           | Amps    | 15.2                        | 15.5 | 15.9 | 16.4 | 16.2 | 16.5 | 16.9 | 17.4 | 17.3 | 17.7 | 18.1 | 18.7 | 18.3                                 | 18.7 | 19.2 | 19.8 | 19.3  | 19.7 | 20.2 | 20.9 | 20.2  | 20.7 | 21.3 | 22.0 |
|           | Hi PR   | 268                         | 288  | 304  | 317  | 300  | 323  | 341  | 356  | 342  | 368  | 388  | 405  | 389                                  | 419  | 442  | 461  | 438   | 471  | 497  | 519  | 484   | 520  | 550  | 573  |
|           | Lo PR   | 115                         | 123  | 134  | 143  | 122  | 130  | 142  | 151  | 127  | 135  | 147  | 157  | 133                                  | 142  | 155  | 165  | 140   | 148  | 162  | 173  | 144   | 154  | 168  | 179  |
|           | MBh     | 46.4                        | 47.4 | 50.7 | 54.2 | 45.3 | 46.3 | 49.5 | 52.9 | 44.3 | 45.2 | 48.3 | 51.7 | 43.2                                 | 44.1 | 47.1 | 50.4 | 41.0  | 41.9 | 44.8 | 47.9 | 38.0  | 38.8 | 41.5 | 44.4 |
|           | S/T     | 0.93                        | 0.87 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.56 | 1.00                                 | 0.96 | 0.78 | 0.58 | 1.00  | 0.99 | 0.81 | 0.61 | 1.00  | 1.00 | 0.82 | 0.61 |
|           | ΔT      | 25                          | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25   | 24   | 21   | 17   | 25                                   | 24   | 21   | 17   | 24    | 24   | 21   | 17   | 22    | 22   | 20   | 16   |
| kW        | 3.20    | 3.27                        | 3.37 | 3.48 | 3.45 | 3.52 | 3.63 | 3.75 | 3.66 | 3.74 | 3.87 | 3.99 | 3.86 | 3.94                                 | 4.07 | 4.21 | 4.02 | 4.11  | 4.24 | 4.39 | 4.16 | 4.25  | 4.40 | 4.54 |      |
| Amps      | 15.1    | 15.4                        | 15.8 | 16.2 | 16.1 | 16.4 | 16.8 | 17.3 | 17.2 | 17.5 | 18.0 | 18.6 | 18.1 | 18.5                                 | 19.0 | 19.6 | 19.1 | 19.5  | 20.1 | 20.7 | 20.1 | 20.5  | 21.1 | 21.8 |      |
| Hi PR     | 265     | 285                         | 301  | 314  | 297  | 320  | 338  | 353  | 338  | 364  | 384  | 401  | 385  | 415                                  | 438  | 457  | 433  | 466   | 493  | 514  | 479  | 515   | 544  | 568  |      |
| Lo PR     | 114     | 122                         | 133  | 141  | 121  | 128  | 140  | 149  | 125  | 134  | 146  | 155  | 132  | 140                                  | 153  | 163  | 138  | 147   | 160  | 171  | 143  | 152   | 166  | 177  |      |
| MBh       | 42.9    | 43.8                        | 46.8 | 50.0 | 41.9 | 42.8 | 45.7 | 48.8 | 40.9 | 41.8 | 44.6 | 47.7 | 39.9 | 40.7                                 | 43.5 | 46.5 | 37.9 | 38.7  | 41.3 | 44.2 | 35.1 | 35.8  | 38.3 | 40.9 |      |
| S/T       | 0.90    | 0.84                        | 0.69 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.95 | 0.90 | 0.73 | 0.54 | 0.99 | 0.92                                 | 0.75 | 0.56 | 1.02 | 0.96  | 0.78 | 0.58 | 1.03 | 0.97  | 0.79 | 0.59 |      |
| ΔT        | 25      | 24                          | 21   | 17   | 26   | 25   | 21   | 17   | 26   | 25   | 21   | 17   | 26   | 25                                   | 22   | 17   | 25   | 24    | 21   | 17   | 24   | 23    | 20   | 16   |      |
| kW        | 3.12    | 3.19                        | 3.29 | 3.39 | 3.36 | 3.43 | 3.54 | 3.66 | 3.57 | 3.65 | 3.77 | 3.89 | 3.76 | 3.84                                 | 3.97 | 4.10 | 3.92 | 4.00  | 4.14 | 4.28 | 4.05 | 4.14  | 4.28 | 4.43 |      |
| Amps      | 14.8    | 15.0                        | 15.4 | 15.9 | 15.7 | 16.0 | 16.4 | 16.9 | 16.8 | 17.1 | 17.6 | 18.1 | 17.7 | 18.1                                 | 18.6 | 19.2 | 18.7 | 19.1  | 19.6 | 20.2 | 19.6 | 20.0  | 20.6 | 21.3 |      |
| Hi PR     | 257     | 277                         | 292  | 305  | 289  | 310  | 328  | 342  | 328  | 353  | 373  | 389  | 374  | 402                                  | 425  | 443  | 420  | 452   | 478  | 498  | 465  | 500   | 528  | 551  |      |
| Lo PR     | 111     | 118                         | 129  | 137  | 117  | 125  | 136  | 145  | 122  | 130  | 141  | 151  | 128  | 136                                  | 149  | 158  | 134  | 143   | 156  | 166  | 139  | 147   | 161  | 171  |      |

|           |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>85</b> | MBh   | 48.7 | 49.6 | 51.9 | 55.4 | 47.5 | 48.4 | 50.7 | 54.1 | 46.4 | 47.3 | 49.5 | 52.8 | 45.3 | 46.1 | 48.3 | 51.5 | 43.0 | 43.8 | 45.9 | 49.0 | 39.8 | 40.6 | 42.5 | 45.4 |
|           | S/T   | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.79 | 1.00 | 1.00 | 0.97 | 0.82 | 1.00 | 1.00 | 0.98 | 0.83 |
|           | ΔT    | 25   | 25   | 24   | 21   | 24   | 25   | 24   | 21   | 24   | 24   | 24   | 21   | 23   | 24   | 24   | 21   | 22   | 22   | 24   | 21   | 20   | 21   | 22   | 19   |
|           | kW    | 3.25 | 3.32 | 3.42 | 3.54 | 3.50 | 3.58 | 3.69 | 3.81 | 3.72 | 3.81 | 3.93 | 4.06 | 3.92 | 4.01 | 4.14 | 4.28 | 4.09 | 4.18 | 4.32 | 4.46 | 4.23 | 4.33 | 4.47 | 4.62 |
|           | Amps  | 15.3 | 15.6 | 16.0 | 16.5 | 16.3 | 16.6 | 17.1 | 17.6 | 17.4 | 17.8 | 18.3 | 18.9 | 18.4 | 18.8 | 19.3 | 19.9 | 19.4 | 19.8 | 20.4 | 21.0 | 20.4 | 20.8 | 21.4 | 22.1 |
|           | Hi PR | 270  | 291  | 307  | 320  | 303  | 327  | 345  | 360  | 345  | 371  | 392  | 409  | 393  | 423  | 447  | 466  | 442  | 476  | 502  | 524  | 489  | 526  | 555  | 579  |
|           | Lo PR | 117  | 124  | 135  | 144  | 123  | 131  | 143  | 152  | 128  | 136  | 149  | 158  | 134  | 143  | 156  | 166  | 141  | 150  | 164  | 174  | 146  | 155  | 169  | 180  |
|           | MBh   | 47.2 | 48.2 | 50.4 | 53.8 | 46.1 | 47.0 | 49.3 | 52.6 | 45.0 | 45.9 | 48.1 | 51.3 | 43.9 | 44.8 | 46.9 | 50.0 | 41.7 | 42.6 | 44.6 | 47.5 | 38.7 | 39.4 | 41.3 | 44.0 |
|           | S/T   | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.98 | 0.79 |
|           | ΔT    | 27   | 26   | 25   | 21   | 27   | 26   | 25   | 22   | 26   | 26   | 25   | 22   | 25   | 26   | 25   | 22   | 24   | 25   | 25   | 22   | 22   | 23   | 23   | 20   |
| kW        | 3.22  | 3.29 | 3.40 | 3.51 | 3.47 | 3.55 | 3.66 | 3.78 | 3.69 | 3.77 | 3.90 | 4.03 | 3.89 | 3.97 | 4.10 | 4.24 | 4.05 | 4.14 | 4.28 | 4.43 | 4.19 | 4.29 | 4.43 | 4.58 |      |
| Amps      | 15.2  | 15.5 | 15.9 | 16.4 | 16.2 | 16.5 | 16.9 | 17.4 | 17.3 | 17.7 | 18.1 | 18.7 | 18.3 | 18.7 | 19.2 | 19.8 | 19.3 | 19.7 | 20.2 | 20.9 | 20.2 | 20.7 | 21.3 | 22.0 |      |
| Hi PR     | 268   | 288  | 304  | 317  | 300  | 323  | 341  | 356  | 342  | 368  | 388  | 405  | 389  | 419  | 442  | 461  | 438  | 471  | 497  | 519  | 484  | 520  | 550  | 573  |      |
| Lo PR     | 115   | 123  | 134  | 143  | 122  | 130  | 142  | 151  | 127  | 135  | 147  | 157  | 133  | 142  | 155  | 165  | 140  | 148  | 162  | 173  | 144  | 154  | 168  | 179  |      |
| MBh       | 43.6  | 44.4 | 46.5 | 49.7 | 42.6 | 43.4 | 45.5 | 48.5 | 41.6 | 42.4 | 44.4 | 47.3 | 40.6 | 41.3 | 43.3 | 46.2 | 38.5 | 39.3 | 41.1 | 43.9 | 35.7 | 36.4 | 38.1 | 40.7 |      |
| S/T       | 0.94  | 0.91 | 0.82 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.94 | 0.76 |      |
| ΔT        | 27    | 27   | 25   | 22   | 27   | 27   | 25   | 22   | 27   | 27   | 25   | 22   | 27   | 27   | 26   | 22   | 25   | 26   | 25   | 22   | 23   | 24   | 24   | 20   |      |
| kW        | 3.15  | 3.21 | 3.31 | 3.42 | 3.39 | 3.46 | 3.57 | 3.69 | 3.60 | 3.68 | 3.80 | 3.93 | 3.79 | 3.87 | 4.00 | 4.14 | 3.95 | 4.04 | 4.17 | 4.31 | 4.09 | 4.18 | 4.32 | 4.47 |      |
| Amps      | 14.9  | 15.1 | 15.5 | 16.0 | 15.8 | 16.1 | 16.6 | 17.1 | 16.9 | 17.3 | 17.7 | 18.3 | 17.9 | 18.2 | 18.7 | 19.3 | 18.8 | 19.2 | 19.7 | 20.4 | 19.8 | 20.2 | 20.7 | 21.4 |      |
| Hi PR     | 260   | 279  | 295  | 308  | 291  | 314  | 331  | 345  | 331  | 357  | 377  | 393  | 377  | 406  | 429  | 447  | 425  | 457  | 483  | 503  | 469  | 505  | 533  | 556  |      |
| Lo PR     | 112   | 119  | 130  | 138  | 118  | 126  | 137  | 146  | 123  | 131  | 143  | 152  | 129  | 137  | 150  | 160  | 135  | 144  | 157  | 167  | 140  | 149  | 163  | 173  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB       | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |    |
|-----------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
|           |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |    |
|           |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| <b>70</b> | MBh     | 54.8                        | 56.8 | 62.2 | -    | 53.5 | 55.5 | 60.8 | -    | 52.2 | 54.2 | 59.3 | -    | 51.0                                 | 52.8 | 57.9 | -    | 48.4  | 50.2 | 55.0 | -    | 44.9  | 46.5 | 50.9 | -  |
|           | S/T     | 0.73                        | 0.61 | 0.42 | -    | 0.76 | 0.63 | 0.44 | -    | 0.78 | 0.65 | 0.45 | -    | 0.80                                 | 0.67 | 0.46 | -    | 0.83  | 0.69 | 0.48 | -    | 0.84  | 0.70 | 0.48 | -  |
|           | ΔT      | 19                          | 17   | 13   | -    | 20   | 17   | 13   | -    | 20   | 17   | 13   | -    | 20                                   | 17   | 13   | -    | 19    | 17   | 13   | -    | 18    | 16   | 12   | -  |
|           | kW      | 3.78                        | 3.86 | 3.99 | -    | 4.08 | 4.17 | 4.30 | -    | 4.34 | 4.44 | 4.58 | -    | 4.57                                 | 4.67 | 4.83 | -    | 4.77  | 4.88 | 5.04 | -    | 4.94  | 5.05 | 5.22 | -  |
|           | Amps    | 17.3                        | 17.7 | 18.2 | -    | 18.5 | 18.9 | 19.4 | -    | 19.9 | 20.3 | 20.9 | -    | 21.1                                 | 21.5 | 22.2 | -    | 22.3  | 22.8 | 23.5 | -    | 23.5  | 24.0 | 24.7 | -  |
|           | Hi PR   | 255                         | 274  | 289  | -    | 286  | 307  | 325  | -    | 325  | 350  | 369  | -    | 370                                  | 398  | 420  | -    | 416   | 448  | 473  | -    | 460   | 495  | 523  | -  |
|           | Lo PR   | 108                         | 115  | 125  | -    | 114  | 121  | 132  | -    | 119  | 126  | 138  | -    | 125                                  | 132  | 145  | -    | 130   | 139  | 152  | -    | 135   | 144  | 157  | -  |
|           | MBh     | 53.2                        | 55.1 | 60.4 | -    | 52.0 | 53.9 | 59.0 | -    | 50.7 | 52.6 | 57.6 | -    | 49.5                                 | 51.3 | 56.2 | -    | 47.0  | 48.7 | 53.4 | -    | 43.5  | 45.1 | 49.5 | -  |
|           | S/T     | 0.70                        | 0.58 | 0.40 | -    | 0.72 | 0.60 | 0.42 | -    | 0.74 | 0.62 | 0.43 | -    | 0.76                                 | 0.64 | 0.44 | -    | 0.79  | 0.66 | 0.46 | -    | 0.80  | 0.67 | 0.46 | -  |
|           | ΔT      | 20                          | 17   | 13   | -    | 20   | 18   | 13   | -    | 20   | 18   | 13   | -    | 21                                   | 18   | 14   | -    | 20    | 18   | 13   | -    | 19    | 16   | 12   | -  |
|           | kW      | 3.75                        | 3.83 | 3.96 | -    | 4.05 | 4.13 | 4.27 | -    | 4.31 | 4.40 | 4.55 | -    | 4.53                                 | 4.64 | 4.79 | -    | 4.73  | 4.83 | 5.00 | -    | 4.90  | 5.01 | 5.18 | -  |
|           | Amps    | 17.2                        | 17.5 | 18.0 | -    | 18.4 | 18.8 | 19.3 | -    | 19.7 | 20.2 | 20.7 | -    | 20.9                                 | 21.4 | 22.0 | -    | 22.1  | 22.6 | 23.3 | -    | 23.3  | 23.8 | 24.5 | -  |
| Hi PR     | 252     | 271                         | 286  | -    | 283  | 304  | 321  | -    | 322  | 346  | 365  | -    | 366  | 394                                  | 416  | -    | 412  | 443   | 468  | -    | 455  | 490   | 517  | -    |    |
| Lo PR     | 107     | 114                         | 124  | -    | 113  | 120  | 131  | -    | 117  | 125  | 136  | -    | 123  | 131                                  | 143  | -    | 129  | 137   | 150  | -    | 134  | 142   | 155  | -    |    |
| MBh       | 49.1    | 50.9                        | 55.8 | -    | 48.0 | 49.7 | 54.5 | -    | 46.8 | 48.5 | 53.2 | -    | 45.7 | 47.3                                 | 51.9 | -    | 43.4 | 45.0  | 49.3 | -    | 40.2 | 41.7  | 45.6 | -    |    |
| S/T       | 0.67    | 0.56                        | 0.39 | -    | 0.70 | 0.58 | 0.40 | -    | 0.71 | 0.60 | 0.41 | -    | 0.74 | 0.62                                 | 0.43 | -    | 0.76 | 0.64  | 0.44 | -    | 0.77 | 0.64  | 0.45 | -    |    |
| ΔT        | 20      | 18                          | 13   | -    | 21   | 18   | 14   | -    | 21   | 18   | 14   | -    | 21   | 18                                   | 14   | -    | 21   | 18    | 14   | -    | 19   | 17    | 13   | -    |    |
| kW        | 3.66    | 3.74                        | 3.86 | -    | 3.95 | 4.03 | 4.16 | -    | 4.20 | 4.29 | 4.43 | -    | 4.42 | 4.52                                 | 4.67 | -    | 4.61 | 4.71  | 4.87 | -    | 4.77 | 4.88  | 5.04 | -    |    |
| Amps      | 16.8    | 17.1                        | 17.6 | -    | 17.9 | 18.3 | 18.8 | -    | 19.3 | 19.7 | 20.2 | -    | 20.4 | 20.9                                 | 21.5 | -    | 21.6 | 22.0  | 22.7 | -    | 22.7 | 23.2  | 23.9 | -    |    |
| Hi PR     | 244     | 263                         | 278  | -    | 274  | 295  | 312  | -    | 312  | 336  | 354  | -    | 355  | 382                                  | 404  | -    | 400  | 430   | 454  | -    | 442  | 475   | 502  | -    |    |
| Lo PR     | 104     | 110                         | 120  | -    | 110  | 117  | 127  | -    | 114  | 121  | 132  | -    | 120  | 127                                  | 139  | -    | 125  | 133   | 146  | -    | 130  | 138   | 151  | -    |    |

|           |       |      |      |      |      |      |      |      |      |      |      |      |      |             |             |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|------|------|------|------|------|------|------|------|------|------|------|------|-------------|-------------|------|------|------|------|------|------|------|------|------|------|
| <b>75</b> | MBh   | 55.7 | 57.4 | 62.1 | 66.7 | 54.4 | 56.0 | 60.7 | 65.1 | 53.1 | 54.7 | 59.2 | 63.6 | 51.8        | <b>53.4</b> | 57.8 | 62.0 | 49.2 | 50.7 | 54.9 | 58.9 | 45.6 | 47.0 | 50.8 | 54.6 |
|           | S/T   | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91        | <b>0.81</b> | 0.62 | 0.40 | 0.94 | 0.85 | 0.64 | 0.41 | 0.95 | 0.85 | 0.65 | 0.41 |
|           | ΔT    | 22   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23   | 21   | 17   | 12   | 23          | <b>21</b>   | 17   | 12   | 23   | 21   | 17   | 12   | 21   | 19   | 16   | 11   |
|           | kW    | 3.81 | 3.90 | 4.02 | 4.15 | 4.11 | 4.20 | 4.34 | 4.49 | 4.38 | 4.48 | 4.62 | 4.78 | 4.61        | <b>4.71</b> | 4.87 | 5.04 | 4.81 | 4.92 | 5.08 | 5.26 | 4.98 | 5.09 | 5.27 | 5.45 |
|           | Amps  | 17.5 | 17.8 | 18.3 | 18.9 | 18.7 | 19.1 | 19.6 | 20.2 | 20.1 | 20.5 | 21.1 | 21.8 | 21.3        | <b>21.7</b> | 22.4 | 23.1 | 22.5 | 23.0 | 23.7 | 24.5 | 23.7 | 24.2 | 24.9 | 25.8 |
|           | Hi PR | 257  | 277  | 292  | 305  | 288  | 310  | 328  | 342  | 328  | 353  | 373  | 389  | 374         | <b>402</b>  | 425  | 443  | 420  | 452  | 478  | 498  | 465  | 500  | 528  | 551  |
|           | Lo PR | 109  | 116  | 127  | 135  | 115  | 123  | 134  | 143  | 120  | 127  | 139  | 148  | 126         | <b>134</b>  | 146  | 156  | 132  | 140  | 153  | 163  | 136  | 145  | 158  | 169  |
|           | MBh   | 54.1 | 55.7 | 60.3 | 64.7 | 52.8 | 54.4 | 58.9 | 63.2 | 51.6 | 53.1 | 57.5 | 61.7 | 50.3        | <b>51.8</b> | 56.1 | 60.2 | 47.8 | 49.2 | 53.3 | 57.2 | 44.3 | 45.6 | 49.4 | 53.0 |
|           | S/T   | 0.79 | 0.71 | 0.54 | 0.34 | 0.82 | 0.73 | 0.56 | 0.36 | 0.84 | 0.75 | 0.57 | 0.37 | 0.87        | <b>0.78</b> | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.91 | 0.81 | 0.62 | 0.40 |
|           | ΔT    | 23   | 21   | 18   | 12   | 24   | 22   | 18   | 12   | 24   | 22   | 18   | 12   | 24          | <b>22</b>   | 18   | 12   | 23   | 22   | 18   | 12   | 22   | 20   | 17   | 11   |
|           | kW    | 3.78 | 3.87 | 3.99 | 4.12 | 4.08 | 4.17 | 4.31 | 4.45 | 4.34 | 4.44 | 4.58 | 4.74 | 4.57        | <b>4.68</b> | 4.83 | 5.00 | 4.77 | 4.88 | 5.04 | 5.21 | 4.94 | 5.05 | 5.22 | 5.40 |
|           | Amps  | 17.3 | 17.7 | 18.2 | 18.8 | 18.5 | 18.9 | 19.4 | 20.1 | 19.9 | 20.3 | 20.9 | 21.6 | 21.1        | <b>21.6</b> | 22.2 | 22.9 | 22.3 | 22.8 | 23.5 | 24.3 | 23.5 | 24.0 | 24.7 | 25.6 |
| Hi PR     | 255   | 274  | 289  | 302  | 286  | 307  | 325  | 339  | 325  | 350  | 369  | 385  | 370  | <b>398</b>  | 420         | 439  | 416  | 448  | 473  | 493  | 460  | 495  | 523  | 545  |      |
| Lo PR     | 108   | 115  | 125  | 134  | 114  | 121  | 132  | 141  | 119  | 126  | 138  | 147  | 125  | <b>132</b>  | 145         | 154  | 131  | 139  | 152  | 161  | 135  | 144  | 157  | 167  |      |
| MBh       | 49.9  | 51.4 | 55.6 | 59.7 | 48.8 | 50.2 | 54.4 | 58.3 | 47.6 | 49.0 | 53.1 | 56.9 | 46.5 | <b>47.8</b> | 51.8        | 55.6 | 44.1 | 45.4 | 49.2 | 52.8 | 40.9 | 42.1 | 45.6 | 48.9 |      |
| S/T       | 0.76  | 0.68 | 0.52 | 0.33 | 0.79 | 0.71 | 0.54 | 0.34 | 0.81 | 0.73 | 0.55 | 0.35 | 0.84 | <b>0.75</b> | 0.57        | 0.36 | 0.87 | 0.78 | 0.59 | 0.38 | 0.88 | 0.78 | 0.59 | 0.38 |      |
| ΔT        | 24    | 22   | 18   | 12   | 24   | 22   | 18   | 12   | 24   | 22   | 18   | 12   | 24   | <b>22</b>   | 18          | 13   | 24   | 22   | 18   | 12   | 22   | 20   | 17   | 12   |      |
| kW        | 3.69  | 3.77 | 3.89 | 4.02 | 3.98 | 4.07 | 4.20 | 4.34 | 4.23 | 4.33 | 4.47 | 4.62 | 4.46 | <b>4.56</b> | 4.71        | 4.87 | 4.65 | 4.75 | 4.91 | 5.08 | 4.81 | 4.92 | 5.09 | 5.26 |      |
| Amps      | 16.9  | 17.3 | 17.7 | 18.3 | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.4 | 21.1 | 20.6 | <b>21.0</b> | 21.6        | 22.4 | 21.7 | 22.2 | 22.9 | 23.6 | 22.9 | 23.4 | 24.1 | 24.9 |      |
| Hi PR     | 247   | 266  | 281  | 293  | 277  | 298  | 315  | 328  | 315  | 339  | 358  | 373  | 359  | <b>386</b>  | 408         | 425  | 404  | 435  | 459  | 479  | 446  | 480  | 507  | 529  |      |
| Lo PR     | 105   | 111  | 122  | 130  | 111  | 118  | 129  | 137  | 115  | 122  | 134  | 142  | 121  | <b>129</b>  | 140         | 149  | 127  | 135  | 147  | 157  | 131  | 139  | 152  | 162  |      |

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



| MODEL       | SPEED | VOLTS |       | E.S.P (IN. OF H2O) |      |      |      |      |      |      |      |      |
|-------------|-------|-------|-------|--------------------|------|------|------|------|------|------|------|------|
|             |       |       |       | 0.1                | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7  | 0.8  | 0.9  |
| GPC1424M41* | T1    | 230   | CFM   | 580                | 505  | 445  | 390  | 320  | ---  | ---  | ---  |      |
|             |       |       | WATTS | 36                 | 46   | 54   | 60   | 65   | ---  | ---  | ---  |      |
|             | T2/T3 | 230   | CFM   | 900                | 850  | 800  | 740  | 655  | 605  | 555  | 490  | 420  |
|             |       |       | WATTS | 92                 | 101  | 110  | 119  | 126  | 135  | 140  | 145  | 153  |
|             | T4/T5 | 230   | CFM   | 1230               | 1190 | 1140 | 1095 | 1040 | 990  | 920  | 850  | 785  |
|             |       |       | WATTS | 202                | 212  | 220  | 233  | 235  | 243  | 249  | 262  | 265  |
| GPC1430M41* | T1    | 230   | CFM   | ---                | 550  | 475  | 415  | 340  | 270  | ---  | ---  | ---  |
|             |       |       | WATTS | ---                | 50   | 59   | 66   | 74   | 77   | ---  | ---  | ---  |
|             | T2/T3 | 230   | CFM   | 1070               | 1030 | 985  | 935  | 875  | 770  | 705  | 660  | ---  |
|             |       |       | WATTS | 144                | 153  | 160  | 169  | 178  | 184  | 188  | 200  | ---  |
|             | T4/T5 | 230   | CFM   | 1345               | 1305 | 1260 | 1220 | 1180 | 1125 | 1080 | 975  | 900  |
|             |       |       | WATTS | 258                | 273  | 272  | 283  | 292  | 298  | 306  | 310  | 320  |
| GPC1436M41* | T1    | 230   | CFM   | 1070               | 1030 | 980  | 935  | 870  | 775  | 720  | 665  | ---  |
|             |       |       | WATTS | 145                | 161  | 165  | 173  | 181  | 190  | 198  | 202  | ---  |
|             | T2/T3 | 230   | CFM   | 1285               | 1245 | 1205 | 1165 | 1110 | 1060 | 1005 | 910  | 860  |
|             |       |       | WATTS | 238                | 246  | 258  | 264  | 263  | 282  | 288  | 296  | 296  |
|             | T4/T5 | 230   | CFM   | 1505               | 1465 | 1420 | 1385 | 1335 | 1300 | 1250 | 1205 | 1150 |
|             |       |       | WATTS | 359                | 371  | 384  | 383  | 393  | 398  | 406  | 416  | 422  |
| GPC1442M41* | T1    | 230   | CFM   | 1035               | 995  | 945  | 895  | 845  | 790  | 695  | 630  | 580  |
|             |       |       | WATTS | 132                | 144  | 152  | 157  | 168  | 176  | 183  | 189  | 196  |
|             | T2/T3 | 230   | CFM   | 1410               | 1365 | 1330 | 1290 | 1250 | 1205 | 1155 | 1110 | 1065 |
|             |       |       | WATTS | 301                | 312  | 316  | 322  | 331  | 339  | 347  | 356  | 365  |
|             | T4/T5 | 230   | CFM   | 1545               | 1500 | 1465 | 1425 | 1385 | 1345 | 1310 | 1270 | 1225 |
|             |       |       | WATTS | 390                | 396  | 413  | 417  | 421  | 431  | 435  | 443  | 453  |
| GPC1448M41* | T1    | 230   | CFM   | 1355               | 1300 | 1250 | 1210 | 1155 | 1110 | 1045 | 965  | 905  |
|             |       |       | WATTS | 212                | 228  | 230  | 246  | 248  | 261  | 273  | 282  | 289  |
|             | T2/T3 | 230   | CFM   | 1655               | 1610 | 1575 | 1530 | 1485 | 1440 | 1395 | 1340 | 1285 |
|             |       |       | WATTS | 365                | 370  | 383  | 396  | 410  | 417  | 416  | 423  | 434  |
|             | T4/T5 | 230   | CFM   | 1895               | 1855 | 1805 | 1770 | 1730 | 1685 | 1640 | 1600 | 1565 |
|             |       |       | WATTS | 558                | 558  | 578  | 584  | 590  | 594  | 602  | 612  | 615  |
| GPC1460M41* | T1    | 230   | CFM   | 1360               | 1300 | 1260 | 1215 | 1175 | 1125 | 1085 | 1030 | 960  |
|             |       |       | WATTS | 213                | 221  | 233  | 244  | 255  | 264  | 273  | 293  | 304  |
|             | T2/T3 | 230   | CFM   | 1665               | 1630 | 1595 | 1555 | 1505 | 1475 | 1425 | 1380 | 1360 |
|             |       |       | WATTS | 385                | 405  | 410  | 409  | 429  | 441  | 448  | 454  | 471  |
|             | T4/T5 | 230   | CFM   | 2000               | 1960 | 1925 | 1875 | 1835 | 1800 | 1760 | 1725 | 1680 |
|             |       |       | WATTS | 642                | 651  | 660  | 651  | 672  | 683  | 691  | 699  | 695  |

**Notes**

- Data shown is dry coil. Wet coil pressure drop is approximately 0.1" H<sub>2</sub>O, for two-row indoor coil; 0.2" H<sub>2</sub>O, for three-row indoor coil; and 0.3" H<sub>2</sub>O, for four-row indoor coil.
- Data shown does not include filter pressure drop, approx. 0.08" H<sub>2</sub>O.
- ALL MODELS SHOULD RUN NO LESS THAN 350 CFM/TON. USE HIGHER SPEED TAP OR NEXT SIZE LARGER BLOWER ASM. See Repair Parts list.
- Reduce airflow by 2% for 208-volt operation.



| MODEL AND<br>HEAT KIT USAGE | CIRCUIT #1       |                  | CIRCUIT #2       |                  | SINGLE-POINT KIT |                  | ACTUAL KW /<br>BTU@ 240V |
|-----------------------------|------------------|------------------|------------------|------------------|------------------|------------------|--------------------------|
|                             | MCA <sup>1</sup> | MOP <sup>2</sup> | MCA <sup>1</sup> | MOP <sup>2</sup> | MCA <sup>1</sup> | MOP <sup>2</sup> |                          |
| <b>GPC14240M41**</b>        | 1.9              | ---              | ---              | ---              | --               | --               | ---                      |
| HKP-05C*                    | 21 / 25          | 25 / 25          | ---              | ---              | 25               | 40               | 4.75 / 16,200            |
| HKR-08*, HKR-08C*           | 32 / 36          | 35 / 40          | ---              | ---              | 34 / 39          | 40 / 40          | 7.0 / 23,800             |
| HKP-10C*                    | 43 / 49          | 45 / 50          | ---              | ---              | 45 / 52          | 60 / 60          | 9.5 / 32,400             |
| <b>GPC1430M41**</b>         | 1.9              | ---              | ---              | ---              | --               | --               | ---                      |
| HKP-05C*                    | 21 / 25          | 25 / 25          | ---              | ---              | 25               | 40               | 4.75 / 16,200            |
| HKR-08*, HKR-08C*           | 32 / 36          | 35 / 40          | ---              | ---              | 34 / 39          | 40 / 40          | 7.0 / 23,800             |
| HKP-10C*                    | 43 / 49          | 45 / 50          | ---              | ---              | 45 / 52          | 60 / 60          | 9.5 / 32,400             |
| HKP-15C*                    | 43 / 49          | 45 / 50          | 21 / 25          | 25 / 25          | 66 / 76          | 70 / 80          | 14.25 / 48,600           |
| <b>GPC1436M41**</b>         | 1.9              | ---              | ---              | ---              | --               | --               | ---                      |
| HKP-05C*                    | 21 / 25          | 25 / 25          | ---              | ---              | 25               | 40               | 4.75 / 16,200            |
| HKR-08*, HKR-08C*           | 32 / 36          | 35 / 40          | ---              | ---              | 34 / 39          | 40 / 40          | 7.0 / 23,800             |
| HKP-10C*                    | 43 / 49          | 45 / 50          | ---              | ---              | 45 / 52          | 60 / 60          | 9.5 / 32,400             |
| HKP-15C*                    | 43 / 49          | 45 / 50          | 21 / 25          | 25 / 25          | 66 / 76          | 70 / 80          | 14.25 / 48,600           |
| <b>GPC1442M41**</b>         | 1.9              | ---              | ---              | ---              | --               | --               | ---                      |
| HKP-05C*                    | 21 / 25          | 25 / 25          | ---              | ---              | 25               | 40               | 4.75 / 16,200            |
| HKR-08*, HKR-08C*           | 32 / 36          | 35 / 40          | ---              | ---              | 34 / 39          | 40 / 40          | 7.0 / 23,800             |
| HKP-10C*                    | 43 / 49          | 45 / 50          | ---              | ---              | 45 / 52          | 60 / 60          | 9.5 / 32,400             |
| HKP-15C*                    | 43 / 49          | 45 / 50          | 21 / 25          | 25 / 25          | 66 / 76          | 70 / 80          | 14.25 / 48,600           |
| <b>GPC1448M41**</b>         | 7.3              | ---              | ---              | ---              | --               | --               | ---                      |
| HKP-05C*                    | 21 / 25          | 25 / 25          | ---              | ---              | 32               | 50               | 4.75 / 16,200            |
| HKR-08*, HKR-08C*           | 32 / 36          | 35 / 40          | ---              | ---              | 38 / 40          | 50               | 7.0 / 23,800             |
| HKP-10C*                    | 43 / 49          | 45 / 50          | ---              | ---              | 49 / 56          | 60 / 60          | 9.5 / 32,400             |
| HKP-15C*                    | 43 / 49          | 45 / 50          | 21 / 25          | 25 / 25          | 70 / 80          | 80 / 90          | 14.25 / 48,600           |
| HKP-20C                     | 43 / 49          | 45 / 50          | 43 / 49          | 45 / 50          | 92 / 105         | 100 / 110        | 19.0 / 64,800            |
| <b>GPC1460M41**</b>         | 9.5              | ---              | ---              | ---              | --               | --               | ---                      |
| HKP-05C*                    | 21 / 25          | 25 / 25          | ---              | ---              | 42               | 60               | 4.75 / 16,200            |
| HKR-08*, HKR-08C*           | 32 / 36          | 35 / 40          | ---              | ---              | 42               | 60               | 7.0 / 23,800             |
| HKP-10C*                    | 43 / 49          | 45 / 50          | ---              | ---              | 51 / 58          | 60 / 60          | 9.5 / 32,400             |
| HKP-15C*                    | 43 / 49          | 45 / 50          | 21 / 25          | 25 / 25          | 72 / 82          | 80 / 90          | 14.25 / 48,600           |
| HKP-20C                     | 43 / 49          | 45 / 50          | 43 / 49          | 45 / 50          | 93 / 107         | 100 / 110        | 19.0 / 64,800            |

<sup>1</sup> Minimum Circuit Ampacity @ 208 / 240 V


<sup>2</sup> Maximum Overcurrent Protection Device @ 208 / 240 V

\* Revision level that may or may not be designated

C Circuit breaker option

**NOTE:** HKP-15C\* and HKP-20C\* replace HKR-15C and HKR-20C respectively to meet new UL1995 requirements.

| ECN<br>XXXXXX | REV<br>A   | ZONE<br>XXXX | DESCRIPTION  | CHK<br>-     | ID<br>- | DATE<br>- |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|---------------|------------|--------------|--|--------------|---------|-----------|------------|--|--|--------------|------------|----|----|----|--------------|-------|--------------|--------------|----|------------------|--------------|----|--------------|--------------|----|------------------|--------------|----|--------------|--------------|----|------------------|---|---|--------------|----|----|------------------|---|---|--------------|----|----|------------------|---|---|--------------|----|----|------------------|---|---|--|--|--|--|
|               |            |              | <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th rowspan="2">MODEL</th> <th colspan="3">DIMENSIONS</th> <th colspan="2">CHASSIS SIZE</th> </tr> <tr> <th>W"</th> <th>D"</th> <th>H"</th> <th>MED.</th> <th>LARGE</th> </tr> <tr> <td>GPC1424M41A*</td> <td>47</td> <td>51</td> <td>34<math>\frac{3}{4}</math></td> <td>X</td> <td>X</td> </tr> <tr> <td>GPC1430M41A*</td> <td>47</td> <td>51</td> <td>34<math>\frac{3}{4}</math></td> <td>X</td> <td>X</td> </tr> <tr> <td>GPC1436M41A*</td> <td>47</td> <td>51</td> <td>34<math>\frac{3}{4}</math></td> <td>X</td> <td>X</td> </tr> <tr> <td>GPC1442M41A*</td> <td>47</td> <td>51</td> <td>34<math>\frac{3}{4}</math></td> <td>X</td> <td>X</td> </tr> <tr> <td>GPC1448M41A*</td> <td>47</td> <td>51</td> <td>42<math>\frac{3}{4}</math></td> <td>X</td> <td>X</td> </tr> <tr> <td>GPC1460M41A*</td> <td>47</td> <td>51</td> <td>42<math>\frac{3}{4}</math></td> <td>X</td> <td>X</td> </tr> </table> |              |         | MODEL     | DIMENSIONS |  |  | CHASSIS SIZE |            | W" | D" | H" | MED.         | LARGE | GPC1424M41A* | 47           | 51 | 34 $\frac{3}{4}$ | X            | X  | GPC1430M41A* | 47           | 51 | 34 $\frac{3}{4}$ | X            | X  | GPC1436M41A* | 47           | 51 | 34 $\frac{3}{4}$ | X | X | GPC1442M41A* | 47 | 51 | 34 $\frac{3}{4}$ | X | X | GPC1448M41A* | 47 | 51 | 42 $\frac{3}{4}$ | X | X | GPC1460M41A* | 47 | 51 | 42 $\frac{3}{4}$ | X | X |  |  |  |  |
| MODEL         | DIMENSIONS |              |  | CHASSIS SIZE |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               | W"         | D"           | H"   | MED.         | LARGE   |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1424M41A*  | 47         | 51           | 34 $\frac{3}{4}$   | X            | X       |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1430M41A*  | 47         | 51           | 34 $\frac{3}{4}$   | X            | X       |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1436M41A*  | 47         | 51           | 34 $\frac{3}{4}$   | X            | X       |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1442M41A*  | 47         | 51           | 34 $\frac{3}{4}$   | X            | X       |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1448M41A*  | 47         | 51           | 42 $\frac{3}{4}$   | X            | X       |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1460M41A*  | 47         | 51           | 42 $\frac{3}{4}$   | X            | X       |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               |            |              |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               |            |              | <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">MODEL</th> <th colspan="2">DIMENSIONS</th> </tr> <tr> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>GPC1424M41A*</td> <td>32</td> <td>16</td> </tr> <tr> <td>GPC1430M41A*</td> <td>32</td> <td>16</td> </tr> <tr> <td>GPC1436M41A*</td> <td>32</td> <td>16</td> </tr> <tr> <td>GPC1442M41A*</td> <td>32</td> <td>16</td> </tr> <tr> <td>GPC1448M41A*</td> <td>40</td> <td>18</td> </tr> <tr> <td>GPC1460M41A*</td> <td>40</td> <td>18</td> </tr> </tbody> </table>  |              |         |           |            |  |  | MODEL        | DIMENSIONS |    | A  | B  | GPC1424M41A* | 32    | 16           | GPC1430M41A* | 32 | 16               | GPC1436M41A* | 32 | 16           | GPC1442M41A* | 32 | 16               | GPC1448M41A* | 40 | 18           | GPC1460M41A* | 40 | 18               |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| MODEL         | DIMENSIONS |              |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               | A          | B            |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1424M41A*  | 32         | 16           |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1430M41A*  | 32         | 16           |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1436M41A*  | 32         | 16           |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1442M41A*  | 32         | 16           |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1448M41A*  | 40         | 18           |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
| GPC1460M41A*  | 40         | 18           |  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               |            |              | <p style="text-align: center;"><b>Goodman Company, L.C.</b></p> <p style="text-align: center;">GPC14M</p> <p style="text-align: center;">DRAWN BY: _____ ENG: _____</p> <p style="text-align: center;">DIMENSIONS ARE IN INCHES<br/>DIMENSIONS ARE IN MILLIMETERS<br/>TOLERANCES:<br/>X-.1 X.1-.15<br/>XX-.4 .015<br/>HOLES .315<br/>TUBES .0015</p>   |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               |            |              | <p>COMPONENTS AND MATERIALS SPECIFIED HEREIN WILL ALSO CONFORM TO THE APPLICABLE SECTION OF GOODMAN MSP 824.01 WORKMANSHIP STANDARD FOR FIT, FEEL AND FINISH.</p> <p>CONFIDENTIAL PROPERTY OF THE GOODMAN MANUFACTURING COMPANY. I.P. NOT TO BE REPRODUCED TO OTHERS, COPIED, OR USED FOR ANY PURPOSE EXCEPT AS AUTHORIZED IN WRITING. MUST BE RETURNED UPON DEMAND, ON COMPLETION OF ORDER, OR OTHER PURPOSE FOR WHICH IT WAS SENT.</p>   |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               |            |              | <p><b>SPECIAL CHARACTERISTICS:</b></p> <p>⊕ = 65 SIGMA    ⊕ = CRITICAL CHARACTERISTIC    ⊕ = SIGNIFICANT CHARACTERISTIC</p>  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |
|               |            |              | <p style="text-align: right;">1</p>  |              |         |           |            |  |  |              |            |    |    |    |              |       |              |              |    |                  |              |    |              |              |    |                  |              |    |              |              |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |              |    |    |                  |   |   |  |  |  |  |

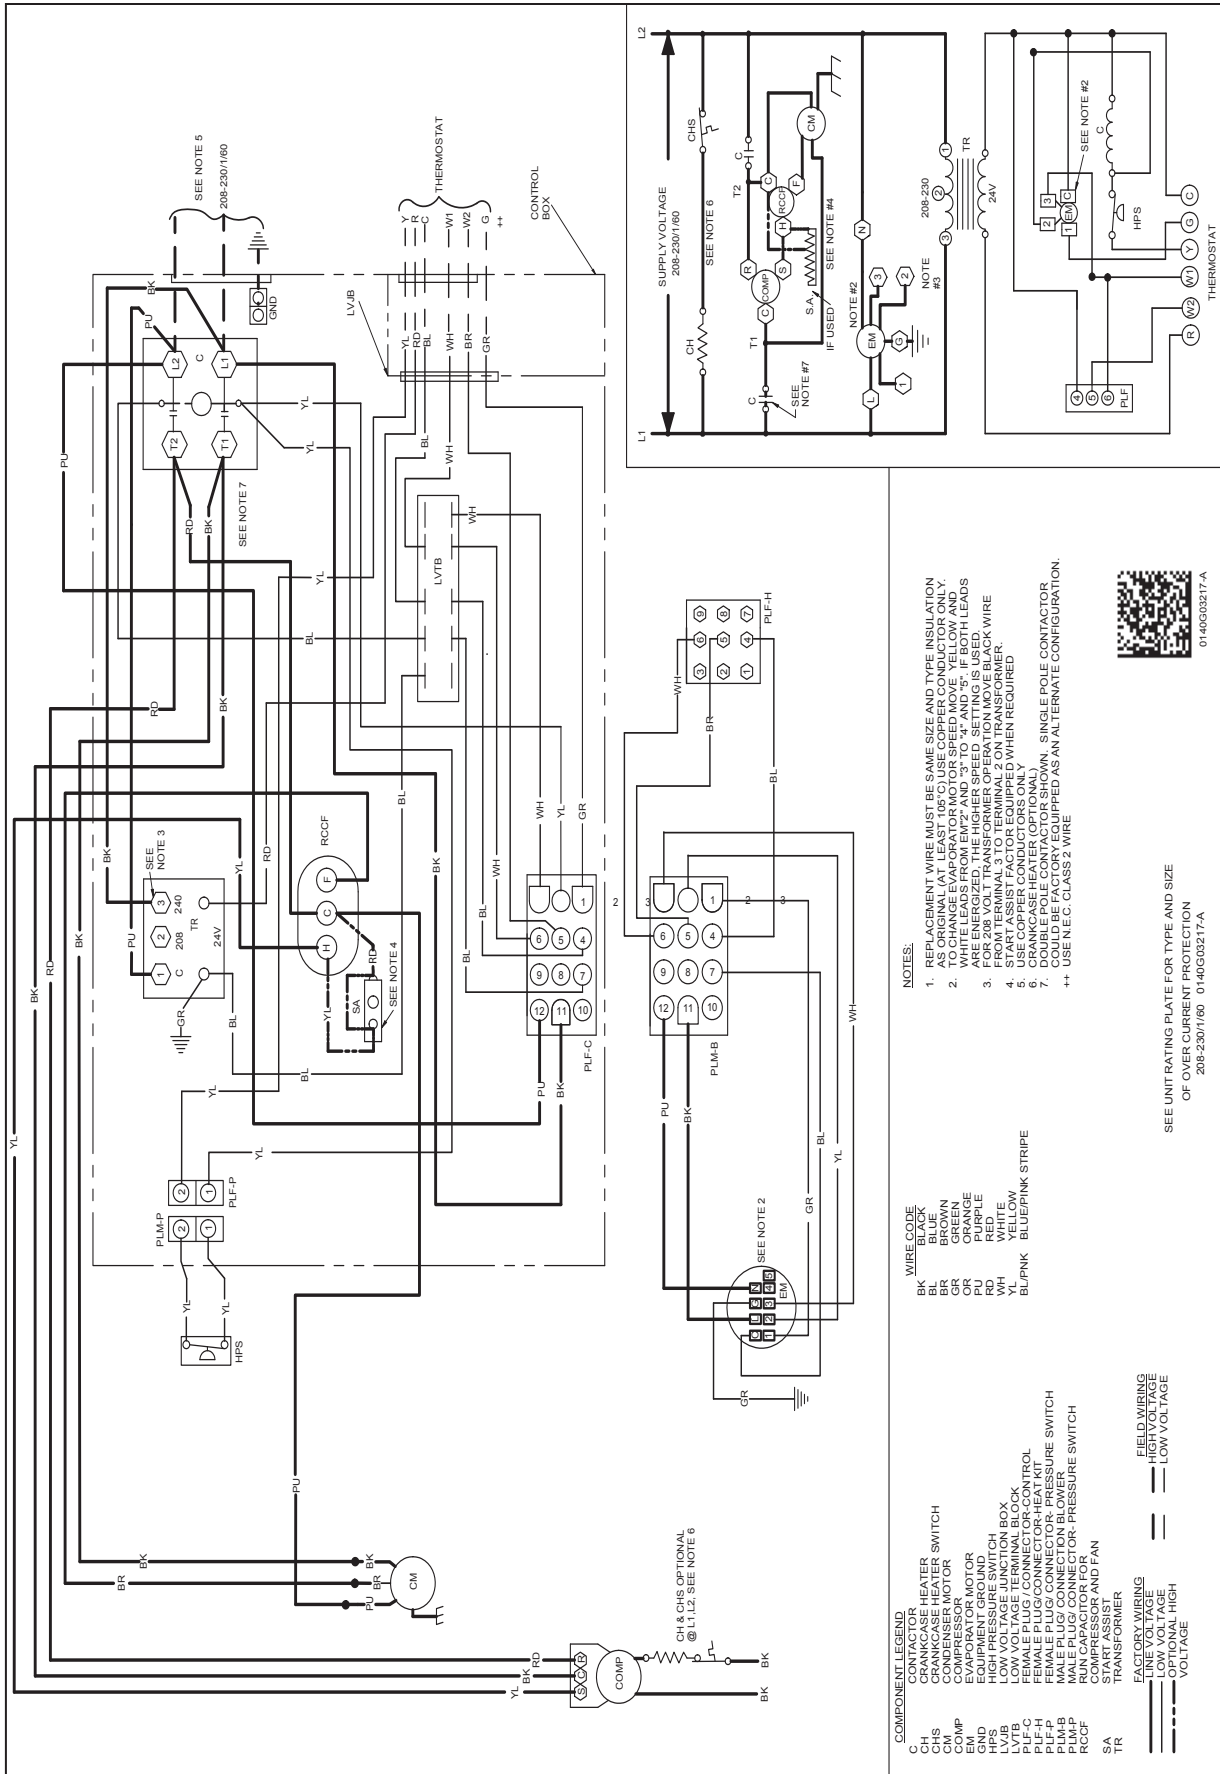

**NOTES:**

- REPLACEMENT WIRE MUST BE SAME SIZE AND TYPE INSULATION AS ORIGINAL (AT LEAST 105°C) USE COPPER CONDUCTOR ONLY.
- TO CHANGE EVAPORATOR MOTOR SPEED MOVE YELLOW AND GREEN LEADS TO THE LOWER SPEED SETTING. THE HIGHER SPEED SETTING IS USED IN LEADS ARE ENERGIZED.
- FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE TO THE LOWER SPEED SETTING. THE HIGHER SPEED SETTING IS USED IN LEADS ARE ENERGIZED.
- START ASSIST FACTOR EQUIPPED WHEN REQUIRED.
- USE COPPER CONDUCTORS ONLY.
- CRANKCASE HEATER (OPTIONAL) IN SINGLE POLE CONTACTOR.
- THIS UNIT IS FACTORY EQUIPPED AS AN ALTERNATE CONFIGURATION. \*\* USE N.E.C. CLASS 2 WIRE

**WIRE CODE**

- BK BLACK
- BR BROWN
- GR GREEN
- RD RED
- PU PURPLE
- WH WHITE
- YL YELLOW
- BL BLUE/PINK STRIPE

**COMPONENT LEGEND**

- C CONTACTOR
- CH CRANKCASE HEATER SWITCH
- CHS CONDENSER HEATER SWITCH
- COMP COMPRESSOR
- EM EVAPORATOR MOTOR
- HPS HIGH PRESSURE SWITCH
- LVJB LOW VOLTAGE JUNCTION BOX
- PLF-C FEMALE PLUG/CONNECTOR-CONTROL KIT
- PLF-H FEMALE PLUG/CONNECTOR-HEAT KIT
- PLF-P MALE PLUG/CONNECTOR-PRESSURE SWITCH
- PLM-P MALE PLUG/CONNECTOR-PRESSURE SWITCH
- RCCF REFRIGERANT CONTROL CIRCUIT FILTER
- SA START ASSIST
- TR TRANSFORMER

**FACTORY WIRING**

- HIGH VOLTAGE
- LOW VOLTAGE
- VOLTAGE

SEE UNIT RATING PLATE FOR TYPE AND SIZE OF OVER CURRENT PROTECTION  
208-230/1/60 0140G03217-A



**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

| ACCESSORY DESCRIPTION                         | ITEM NUMBER     |               |
|---|-----------------|---------------|
|   | MEDICUM CHASSIS | LARGE CHASSIS |
| Concentric Kit                                | CDK36           | CDK4872       |
| Downflow Economizer                           | GPJMED102       | GPJMED103     |
| Downflow Internal Filter Rack                 | DDNIFRPGMM      | DDNIFRPGML    |
| Downflow Manual Damper                        | PGMDD102        | PGMDD103      |
| Downflow Motorized Damper                     | PGMDMD102       | PGMDMD103     |
| Downflow Square to Round                      | SQRPG102        | SQRPG103      |
| Economizer Wiring Harness                     | 0259G00213      | 0259G00213    |
| External Horizontal Filter Rack               | GPGHFR102       | GPGHFR103     |
| Horizontal Duct Cover                         | 20464501PDGK    | 20464502PDGK  |
| Horizontal Economizer                         | DHZECNJPCHM     | DHZECNJPCHL   |
| Horizontal Manual Damper                      | PGMDH102        | PGMDH103      |
| Horizontal Motorized Damper                   | PGMDMH102       | PGMDMH103     |
| Horizontal Square to Round                    | SQRPGH102       | SQRPGH103     |
| Outdoor Thermostat & Emergency Heat Relay Kit | OT/EHR18-60     | OT/EHR18-60   |
| Outdoor Thermostat Kit w/ Lockout Stat        | OT18-60A        | OT18-60A      |
| Roof Curb                                     | D14CRBPGCHMA    | D14CRBPGCHMA  |

### SINGLE-POINT KIT ACCESSORY KITS

Select the single-point kit accessory based on the unit model.

| MODEL        | SINGLE-POINT KIT |
|--------------|------------------|
| GPC1424M41** | SPK-35           |
| GPC1430M41** | SPK-35           |
| GPC1436M41** | SPK-40           |
| GPC1442M41** | SPK-45           |
| GPC1448M41** | SPK-50           |
| GPC1460M41** | SPK-70           |